

Technical Information

Requirements for medium-voltage transformers and transformers for internal power supply for SUNNY CENTRAL and SUNNY CENTRAL STORAGE

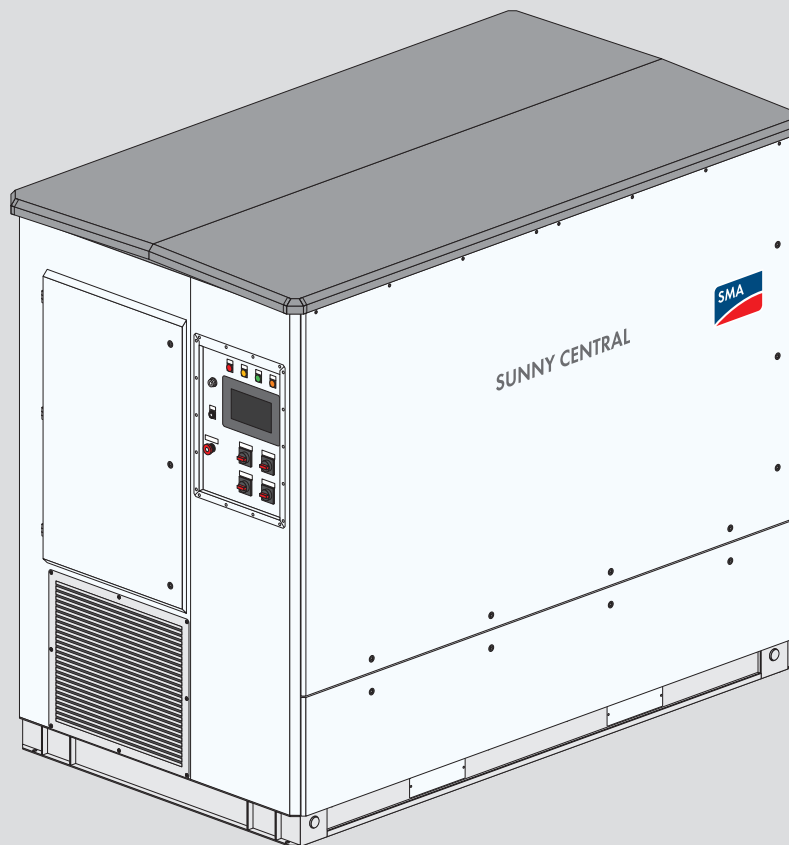


Table of Contents

1	Information on this Document	3
1.1	Validity	3
1.2	Limited statutory warranty	3
2	Technical requirements for the MV transformer	4
2.1	General Requirements.....	4
2.2	Requirements for two-winding transformers used to connect one inverter	5
2.3	Requirements for four-winding transformers used to connect two inverters	6
2.4	Requirements for multi-winding transformers used to connect three inverters.....	8
2.5	Requirements for multi-winding transformers used to connect four inverters.....	8
3	Technical requirements for the transformer for internal power supply	9
3.1	General Requirements.....	9
3.2	Requirements for the connection to the park-side utility grid	9
3.3	Requirements for the connection to the AC output of the inverter	10
4	Appendix	11
4.1	Technical data of the inverter	11
4.2	Technical Data of the Transformers	15

1 Information on this Document

1.1 Validity

This document applied to all device types of the Sunny Central inverter.

It describes the requirements for MV transformers and transformers for internal power supply that are connected to Sunny Central inverters and provided by the customer.

Please note that not all Sunny Central inverters can be combined with all MV transformers. For more details, please refer to the following pages.

1.2 Limited statutory warranty

SMA Solar Technology AG only provides statutory warranty for products purchased from SMA Solar Technology AG.

SMA Solar Technology AG America LLC only provides statutory warranty for products purchased from SMA Solar Technology AG America LLC.

The statutory warranty for the inverters and other products purchased from SMA does not apply if the requirements described in this document are not met.

2 Technical requirements for the MV transformer

2.1 General Requirements

- The MV transformer can be of the liquid-immersed transformer type (for example, with mineral oil or organic oil) or of the dry-type transformer.
- The MV transformer must be designed at its low-voltage windings for voltages that arise during pulsed mode of the inverter.
- The power connection used must have suitable insulation resistance since voltages to ground of ± 2400 V at the most occur when the inverter is in pulsed mode (see Section 4.1 "Technical data of the inverter", page 11).

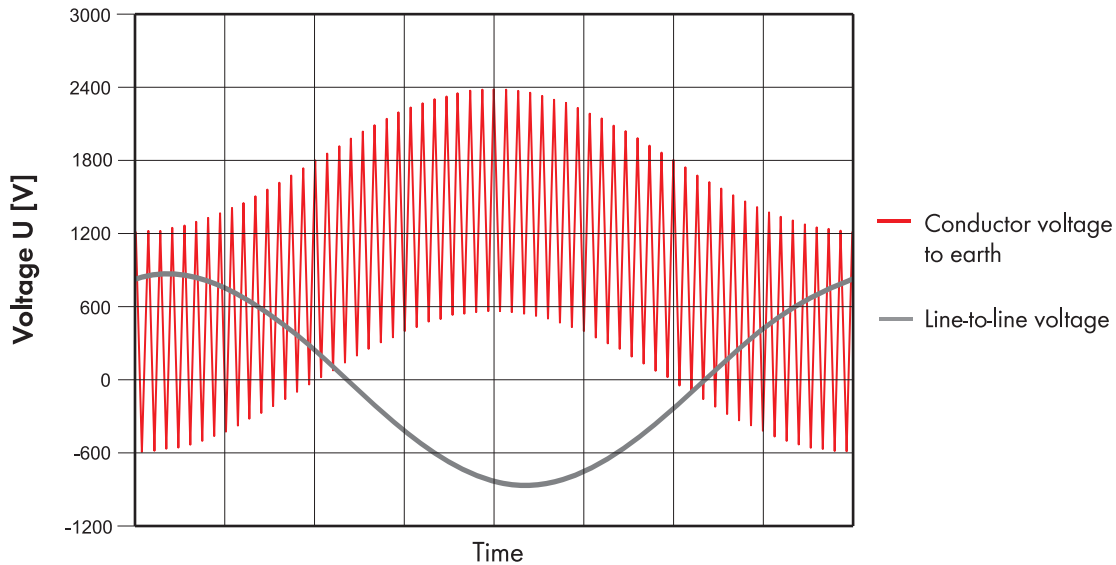


Figure 1: AC voltage level for SC 2500-EV

- The low-voltage windings of the MV transformer must be designed for voltages that are capable of a rate of rise in voltage dV/dt of up to 500 V/ μ s to ground. The line-to-line voltages are sinusoidal.
- It is recommended to provide a shield winding grounded on the tank between the low-voltage windings and the high-voltage windings. This serves as an additional dV/dt filter.
- Each inverter requires a separate, galvanically insulated low-voltage winding. Therefore, the parallel operation of several inverters on one low-voltage winding is not permissible.
- The voltages at the low-voltage windings of the MV transformer must match the AC output voltage of the inverter (see Section 4.1 "Technical data of the inverter", page 11).
- The voltage level on the high-voltage side of the MV transformer must be selected according to the grid-connection point. The MV transformer must be connected to the medium-voltage grid or the high-voltage grid. Connection to the low-voltage grid is not permissible.
- When connecting to the medium-voltage grid, the use of a MV transformer with tap changer on the high voltage side is recommended. MV transformer with tap changer on the high-voltage side enables an adaptation to the voltage level of the medium-voltage grid.
- The MV transformer must be rated according to the temperature-dependent power behavior of the inverter.
- For thermal design, the load curve of the MV transformer and the ambient conditions at the respective mounting location must be taken into account. When operating with an additional reactive power supply, the increased loads in the design of the MV transformer are to be observed (for information about the reactive power supply of the inverter, see the inverter documentation).
- When designing the MV transformer for use with the Sunny Central Storage, it is important to remember that due to battery operation the MV transformer hardly cools down at all at night.

- The MV transformer must be designed for the AC output currents of the inverter (see Section 4.1 "Technical data of the inverter", page 11).
- If grounding of the MV transformer on the medium voltage side is required, the type of grounding regarding the entire system including the MV transformer must be taken into consideration.
- The consequences of any error, such as a short circuit, ground fault or voltage failure, must be taken into account when considering the overall system.
- The country-specific power frequency must be taken into account.
- The applicable country-specific standards and directives must be taken into account.
- SMA reserves the right to measure the currents of the sine-wave filter capacitors during commissioning and, if necessary, to optimize the entire system.

2.2 Requirements for two-winding transformers used to connect one inverter

- The following vector groups are recommended for handling the corresponding neutral points.

Insulated neutral point on medium-voltage side	Resonant grounding on medium-voltage side	Low-resistance grounded neutral point
Dy11, Dy5, Dy1, Dd0, Dd6	YNy0	YNy0
Yd11, Yd5, Yd1	YNd11, YNd5, YNd1	

- If there is a neutral-point terminal on the low-voltage side, this neutral-point terminal must not be grounded or connected.

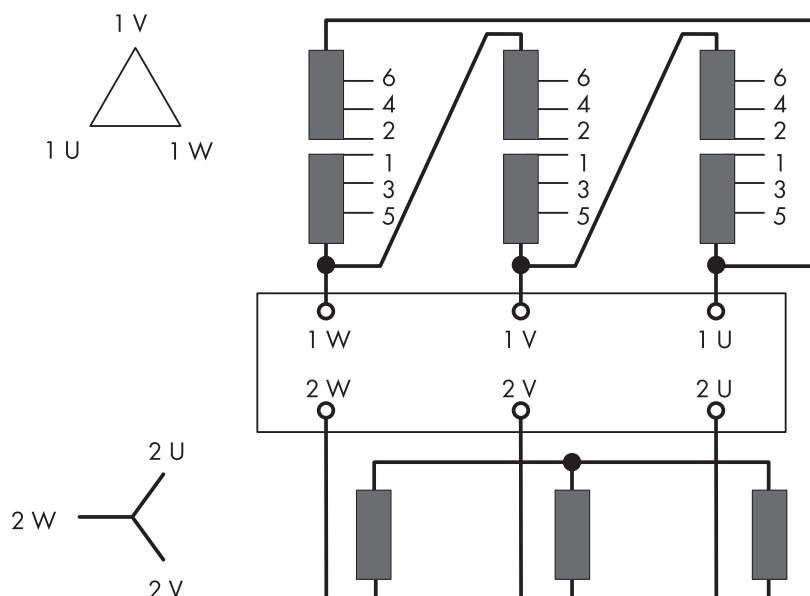


Figure 2: Circuit diagram of two-winding transformers (example)

- The relative impedance voltage V_k of the MV transformer between grid-connection point and AC output of the inverter must be between the minimum value $V_{k\ min}$ and the maximum value $V_{k\ max}$. The relative impedance voltage is based on the nominal power of the MV transformer (see Section 4.2 "Technical Data of the Transformers", page 15).

2.3 Requirements for four-winding transformers used to connect two inverters

A four-winding transformer (double story transformer) consists of two high-voltage windings and two low-voltage windings.

- It is recommended for four-winding transformers to provide a separate shield winding that is grounded at the tank, between each low-voltage winding and high-voltage winding.

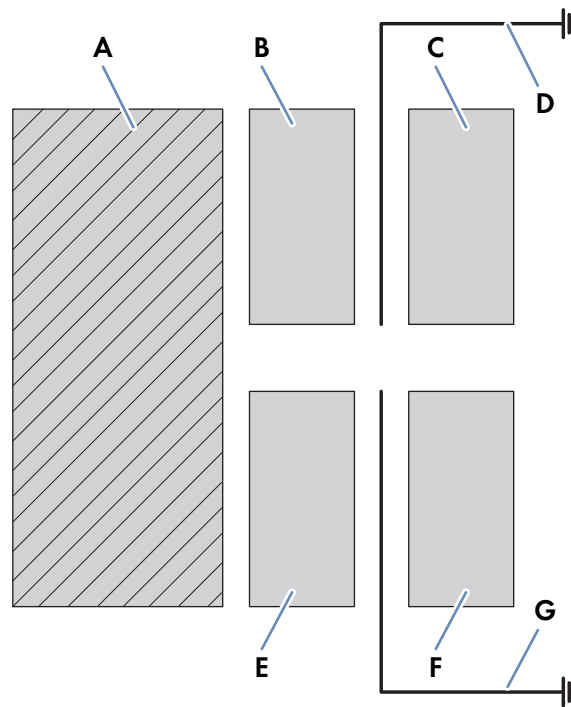


Figure 3: Four-winding transformers with separate shield windings

Position	Designation
A	Core
B	Low-voltage winding 1
C	High-voltage winding 1
D	Shield winding 1
E	Low-voltage winding 2

Position	Designation
F	High-voltage winding 2
G	Shield winding 2

- Four-winding transformers with varying vector groups can be used. The following vector groups are recommended for handling the corresponding neutral points.

Insulated neutral point on medium-voltage side	Resonant grounding on medium-voltage side	Low-resistance grounded neutral point
Dy11y11, Dy5y5, Dy1y1, Dd0d0, Dd6d6	YNy0y0	YNy0y0
Yd11d11, Yd5d5, Yd1d1	YNd11d11, YNd5d5, YNd1d1	

- If there is a neutral-point terminal on the low-voltage side, this neutral-point terminal must not be grounded or connected.

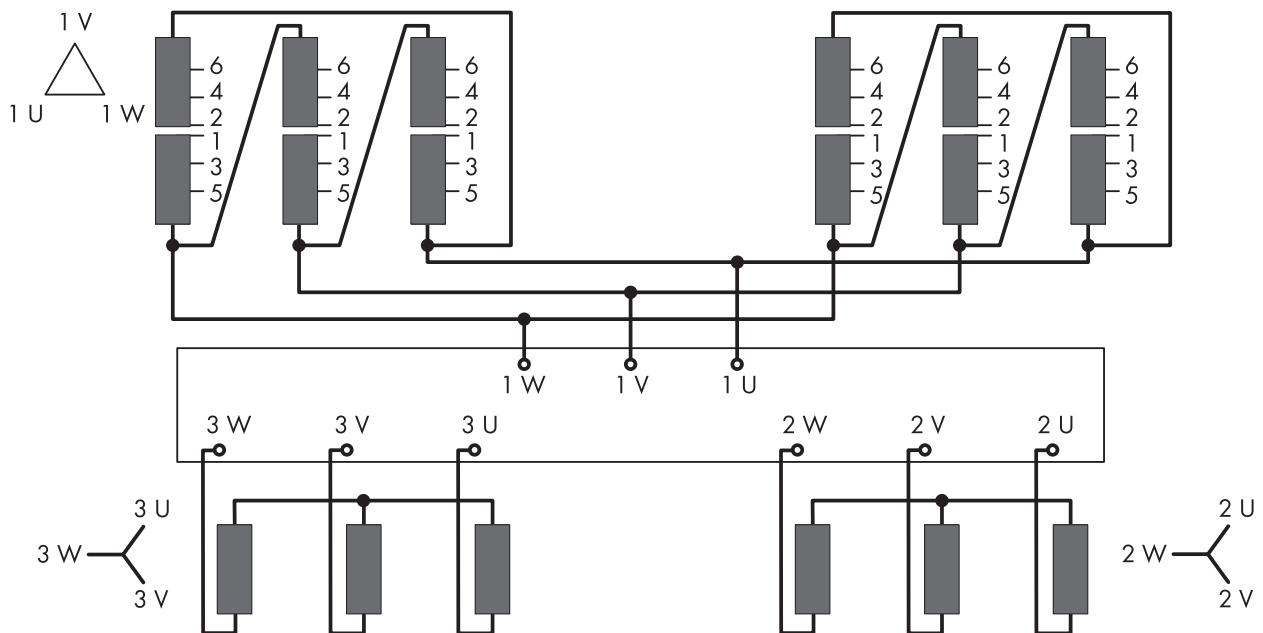


Figure 4: Circuit diagram of four-winding transformers (example)

- Four-winding transformers must be designed for an asymmetrical load flow in the low-voltage systems. This means that for long-term operation, the transformer must be designed for the feed-in of one inverter only.
- Four-winding transformers must be designed for the use of inverters of the Sunny Central Storage series so that full power can be fed in at one of the low-voltage windings and that full power can be used at the other low-voltage winding. The transformer must be designed for continuous operation in this operating state.
- The relative impedance voltage V_k of the MV transformer between grid-connection point and AC output of the inverter must be between the minimum value $V_{k\min}$ and the maximum value $V_{k\max}$. The relative impedance voltage is based on half the nominal power of the MV transformer (see Section 4.2 "Technical Data of the Transformers", page 15).
- The difference of the relative impedance voltages between the grid-connection point of the AC outputs of the two inverters must not exceed 0.5% (see Section 4.2 "Technical Data of the Transformers", page 15).

□

Example: Permissible Difference of Impedance Voltages $V_{k \text{ dif max}}$

The value of the relative impedance voltage from the high-voltage winding to low-voltage winding 1 is 6.0%. The value of the relative impedance voltage from the high-voltage winding to low-voltage winding 2 is 5.6%. The deviation of the relative impedance voltages is permissible since the difference amounts to 0.4% and is thus smaller than 0.5%.

Example: Non-Permissible Difference of Impedance Voltages $V_{k \text{ dif max}}$

The value of the relative impedance voltage from the high-voltage winding to low-voltage winding 1 is 6.0%. The value of the relative impedance voltage from the high-voltage winding to low-voltage winding 2 is 5.4%. The deviation of the relative impedance voltages is not permissible since the difference amounts to 0.6% and is thus greater than 0.5%.

- The value of the relative impedance voltage V_{k1-2} between the two low-voltage winding must be at least 9%. The impedance voltage is based on half the nominal power of the MV transformer. This value can be determined by shorting a low-voltage winding and increasing the voltage on the other low-voltage winding until the nominal current of a low-voltage system flows. During this time, the high-voltage windings are in no-load operation.

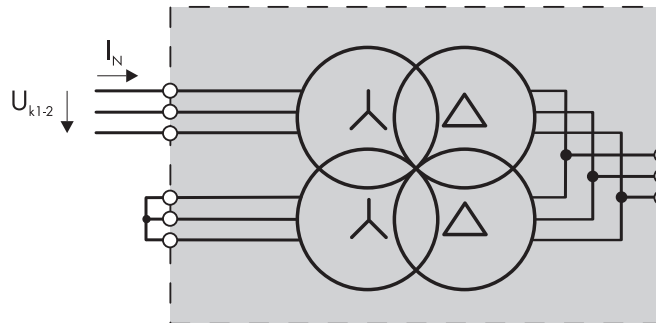


Figure 5: Circuit diagram for determining the impedance voltage U_{k1-2} in four-winding transformers (example)

2.4 Requirements for multi-winding transformers used to connect three inverters

The requirements for MV transformers to which three inverters are to be connected are the same as for two-winding transformers. Three two-winding active parts are mounted in a tank. All three active parts must be set up with separated cores.

2.5 Requirements for multi-winding transformers used to connect four inverters

The requirements for MV transformers to which four inverters are to be connected are the same as for four-winding transformers. Two four-winding active parts of double story design are mounted in a tank. Both active parts must be set up with separated cores.

3 Technical requirements for the transformer for internal power supply

3.1 General Requirements

The inverters are equipped by default with an internal transformer for internal power supply. However, the inverters can also be supplied externally.

General Requirements

- The transformer for internal power supply must be of three-phase design.
- The secondary side of the transformer for internal power supply must supply a voltage of 230 V/400 V (3/N/PE) to connect to the inverter.
- The transformer for internal power supply must be designed for an asymmetric load of 80%.
- A transformer for internal power supply with the Dyn5 or Dyn11 vector group is recommended.
- A shield winding that has to be grounded at the enclosure must be provided between the windings of the transformer for internal power supply.
- The transformer for internal power supply must be equipped with an external protection against overload.
- The ambient conditions of the transformer for internal power supply must be taken into account.
- The country-specific power frequencies must be taken into account.
- The applicable country-specific standards and directives must be taken into account.
- The transformer for internal power supply must provide a power of at least 8.4 kVA per inverter.
- Several inverters can be supplied by one transformer for internal power supply if this transformer can provide a power of at least 8.4 kV per inverter.
- The transformer for internal power supply must have external short-circuit protection ensuring that any potential short-circuit currents are limited to 10.0 kA at the inverter.

3.2 Requirements for the connection to the park-side utility grid

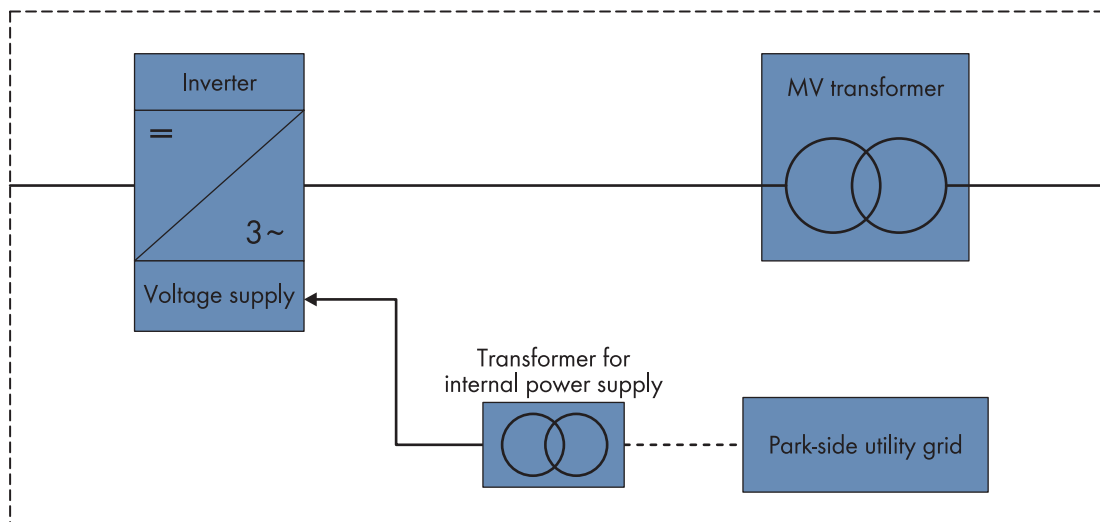


Figure 6: Connection of the transformer for internal power supply to the park-side utility grid

- For the connection to the park-side utility grid, the primary voltage of the transformer for internal power supply must be equal to the grid voltage.

3.3 Requirements for the connection to the AC output of the inverter

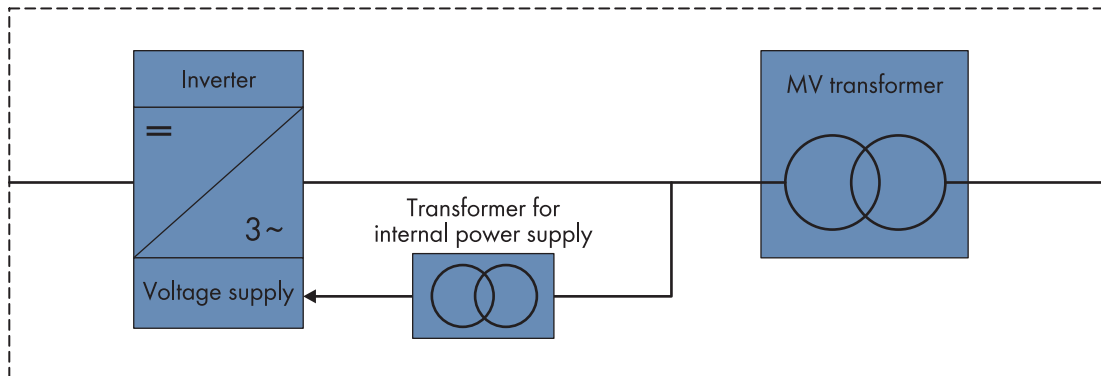


Figure 7: Connection of the transformer for internal power supply to the inverter's AC output

- The primary voltages of the transformer for internal power supply must correspond to the AC output voltages of the inverter (see Section 4.1 "Technical data of the inverter", page 11).
- On the primary side, the transformer for internal power supply must be suitable for the pulsed mode of an inverter.
- On the primary side, the transformer for internal power supply must be suitable for voltages that arise from pulsed mode of the inverter.
- The power connection used must have suitable insulation resistance since voltages to ground of $\pm 2,400$ V at the most occur when the inverter is in pulsed mode (see Section 4.1 "Technical data of the inverter", page 11).
- On the primary side, the transformer for internal power supply must be designed for voltages reaching a rate of rise in voltage dV/dt of up to 500 V/ μ s to ground. The line-to-line voltages are sinusoidal.
- The windings of the transformer for internal power supply must be galvanically insulated. Do not use autotransformers.

4 Appendix

4.1 Technical data of the inverter

Sunny Central

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 35 °C	at 50 °C
SC 2200	1100 V	385 V	±1800 V	3300 A	3000 A
SC 2475	1100 V	434 V	±1800 V	3292 A	2993 A
SC 2500-EV	1500 V	550 V	±2400 V	2624 A	2362 A
SC 2750-EV	1500 V	600 V	±2400 V	2646 A	2406 A
SC 3000-EV	1500 V	655 V	±2400 V	2646 A	2380 A

Sunny Central UP

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 35 °C	at 50 °C
SC 2660 UP	1500 V	600 V	±2400 V	2566 A	2309 A
SC 2800 UP	1500 V	630 V	±2400 V	2566 A	2309 A
SC 2930 UP	1500 V	660 V	±2400 V	2566 A	2309 A
SC 3060 UP	1500 V	690 V	±2400 V	2566 A	2309 A
SC 4000 UP	1500 V	600 V	±2400 V	3850 A	3465 A
SC 4200 UP	1500 V	630 V	±2400 V	3850 A	3465 A
SC 4400 UP	1500 V	660 V	±2400 V	3850 A	3465 A
SC 4600 UP	1500 V	690 V	±2400 V	3850 A	3465 A

Sunny Central US

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 35 °C	at 50 °C
SC 1760-US	1000 V	385 V	±1800 V	2640 A	2640 A
SC 1850-US	1000 V	385 V	±1800 V	2774 A	2774 A
SC 2000-US	1000 V	385 V	±1800 V	3300 A (apparent current) 3000 A (active current)	3000 A

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 35 °C	at 50 °C
SC 2000-EV-US	1500 V	550 V	±2400 V	2310 A (apparent current) 2100 A (active current)	2310 A (apparent current) 2100 A (active current)
SC 2200-US	1000 V	385 V	±1800 V	3300 A	3000 A
SC 2500-EV-US	1500 V	550 V	±2400 V	2624 A	2362 A
SC 2750-EV-US	1500 V	600 V	±2400 V	2646 A	2406 A

Sunny Central UP-US

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 35 °C	at 50 °C
SC 2660 UP-US	1500 V	600 V	±2400 V	2566 A	2309 A
SC 2750 UP-US	1500 V	630 V	±2400 V	2520 A	2270 A
SC 2800 UP-US	1500 V	630 V	±2400 V	2566 A	2309 A
SC 2930 UP-US	1500 V	660 V	±2400 V	2566 A	2309 A
SC 3060 UP-US	1500 V	690 V	±2400 V	2566 A	2309 A
SC 4000 UP-US	1500 V	600 V	±2400 V	3850 A	3465 A
SC 4200 UP-US	1500 V	630 V	±2400 V	3850 A	3465 A
SC 4400 UP-US	1500 V	660 V	±2400 V	3850 A	3465 A
SC 4600 UP-US	1500 V	690 V	±2400 V	3850 A	3465 A

Sunny Central Storage

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 1900	1100 V	337 V	±1800 V	3260 A	2960 A
SCS 2200	1100 V	385 V	±1800 V	3300 A	3000 A
SCS 2475	1100 V	434 V	±1800 V	3292 A	2993 A
SCS 2500-EV	1500 V	550 V	±2400 V	2624 A	2362 A
SCS 2750-EV	1500 V	600 V	±2400 V	2646 A	2406 A
SCS 2900	1100 V	520 V	±1800 V	3265 A	2968 A
SCS 3000-EV	1500 V	655 V	±2400 V	2646 A	2380 A

Sunny Central Storage UP

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 2750 UP	1500 V	600 V	±2400 V	2646 A	2406 A
SCS 3450 UP	1500 V	600 V	±2400 V	3320 A	2822 A
SCS 3600 UP	1500 V	630 V	±2400 V	3320 A	2822 A
SCS 3800 UP	1500 V	660 V	±2400 V	3320 A	2822 A
SCS 3950 UP	1500 V	690 V	±2400 V	3320 A	2822 A

Sunny Central Storage UP-XT

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 2300 UP-XT	1500 V	600 V	±2400 V	2566 A	2181 A
SCS 2400 UP-XT	1500 V	630 V	±2400 V	2566 A	2181 A
SCS 2530 UP-XT	1500 V	660 V	±2400 V	2566 A	2181 A
SCS 2630 UP-XT	1500 V	690 V	±2400 V	2566 A	2181 A
SCS 3450 UP-XT	1500 V	600 V	±2400 V	3850 A	3272 A
SCS 3600 UP-XT	1500 V	630 V	±2400 V	3850 A	3272 A
SCS 3800 UP-XT	1500 V	660 V	±2400 V	3850 A	3272 A
SCS 3950 UP-XT	1500 V	690 V	±2400 V	3850 A	3272 A

Sunny Central Storage US

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 2200-US	1000 V	385 V	±1800 V	3300 A	3000 A
SCS 2475-US	1000 V	434 V	±1800 V	3292 A	2993 A
SCS 2500-EV-US	1500 V	550 V	±2400 V	2624 A	2362 A
SCS 2750-EV-US	1500 V	600 V	±2400 V	2646 A	2406 A
SCS 2900-US	1000 V	520 V	±1800 V	3265 A	2968 A

Sunny Central Storage UP-US

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 2750 UP-US	1500 V	600 V	±2400 V	2646 A	2646 A

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 3450 UP-US	1500 V	600 V	±2400 V	3320 A	2822 A
SCS 3600 UP-US	1500 V	630 V	±2400 V	3320 A	2822 A
SCS 3800 UP-US	1500 V	660 V	±2400 V	3320 A	2822 A
SCS 3950 UP-US	1500 V	690 V	±2400 V	3320 A	2822 A

Sunny Central Storage UP-XT-US

Inverter type	DC voltage	AC voltage	AC peak voltage to ground	AC current	
				at 25 °C	at 50 °C
SCS 2300 UP-XT-US	1500 V	600 V	±2400 V	2566 A	2181 A
SCS 2400 UP-XT-US	1500 V	630 V	±2400 V	2566 A	2181 A
SCS 2530 UP-XT-US	1500 V	660 V	±2400 V	2566 A	2181 A
SCS 2630 UP-XT-US	1500 V	690 V	±2400 V	2566 A	2181 A
SCS 3450 UP-XT-US	1500 V	600 V	±2400 V	3850 A	3272 A
SCS 3600 UP-XT-US	1500 V	630 V	±2400 V	3850 A	3272 A
SCS 3800 UP-XT-US	1500 V	660 V	±2400 V	3850 A	3272 A
SCS 3950 UP-XT-US	1500 V	690 V	±2400 V	3850 A	3272 A

4.2 Technical Data of the Transformers

Sunny Central

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SC 2200	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2475	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2500-EV	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2750-EV	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 3000-EV	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %

Sunny Central UP

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SC 2660 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 2800 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 2930 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 3060 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4000 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4200 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4400 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4600 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

Sunny Central US

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SC 1760-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 1850-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2000-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2000-EV-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2200-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2500-EV-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SC 2750-EV-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %

Sunny Central UP-US

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SC 2660 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 2750 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 2800 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 2930 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 3060 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4000 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4200 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4400 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SC 4600 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

Sunny Central Storage

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 1900	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2200	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2475	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2500-EV	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2750-EV	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2900	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 3000-EV	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %

Sunny Central Storage UP

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 2750 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3450 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3600 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3800 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3950 UP	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

Sunny Central Storage UP-XT

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 2300 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 2400 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 2530 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 2630 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3450 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3600 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3800 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3950 UP-XT	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

Sunny Central Storage US

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 2200-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2475-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2500-EV-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2750-EV-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %
SCS 2900-US	5.0 %	6.0 %	8.5 %	5.0 %	6.0 %	8.5 %	0.5 %	9.0 %

Sunny Central Storage UP-US

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 2750 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3450 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3600 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3800 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3950 UP-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

Sunny Central Storage UP-XT-US

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \min}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 2300 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

Type of the Inverter	Two-winding transformers			Four-winding transformers				
	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ min}}$	$V_{k \text{ nom}}$	$V_{k \text{ max}}$	$V_{k \text{ dif max}}$	$V_{k \text{ 1-2 min}}$
SCS 2400 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 2530 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 2630 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3450 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3600 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3800 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %
SCS 3950 UP-XT-US	6.0 %	-	8.5 %	6.0 %	-	8.5 %	0.5 %	9.0 %

