



# SMA Backup Select-US

Automatic backup switch with integrated breaker panel for your critical loads

## Unmatched flexibility

- Seamlessly integrates with SMA Sunny Boy Smart Energy hybrid inverters
- Protects the most critical circuits automatically - five 15 A / 120 V outlets and two 20 A / 120 V circuits
- Customizable switching timing between backup and grid power to match your needs
- NEMA 3R weatherproof rating - install anywhere, indoors or out

## Easy Installation & Setup

- Flexible installation with four-sided conduit entries and straightforward wiring
- Commission quickly using the SMA 360° mobile app
- Meets code requirements for indoor installations with SMA RSI switch

## Transform Your SBSE-US-50 System

- Add automatic backup power capability to your existing hybrid inverter
- Keep 7 essential household circuits powered during outages
- No manual switching required - operates automatically when you need it most

## Ensure seamless energy security with SMA Backup Select—an affordable, entry-level backup solution.


Designed to pair with the Sunny Boy Smart Energy, SMA Backup Select provides reliable partial backup power, keeping your essential home loads running while the sun is shining.

This single-phase automatic backup switch includes an integrated breaker panel, offering a cost-effective and flexible power source during grid outages.

With a 7 single-pole breaker backup box and power ratings of 3,840 W<sup>1</sup> and 5,760 W<sup>2</sup>, SMA Backup Select is an ideal solution for energy security.

<sup>1</sup> SMA Backup Select offers 3,800W of power for the Sunny Boy Smart Energy 3.8-7.7kW.

<sup>2</sup> SMA Backup Select offers 5,700W of power for the Sunny Boy Smart Energy 9.6 and 11.5kW.

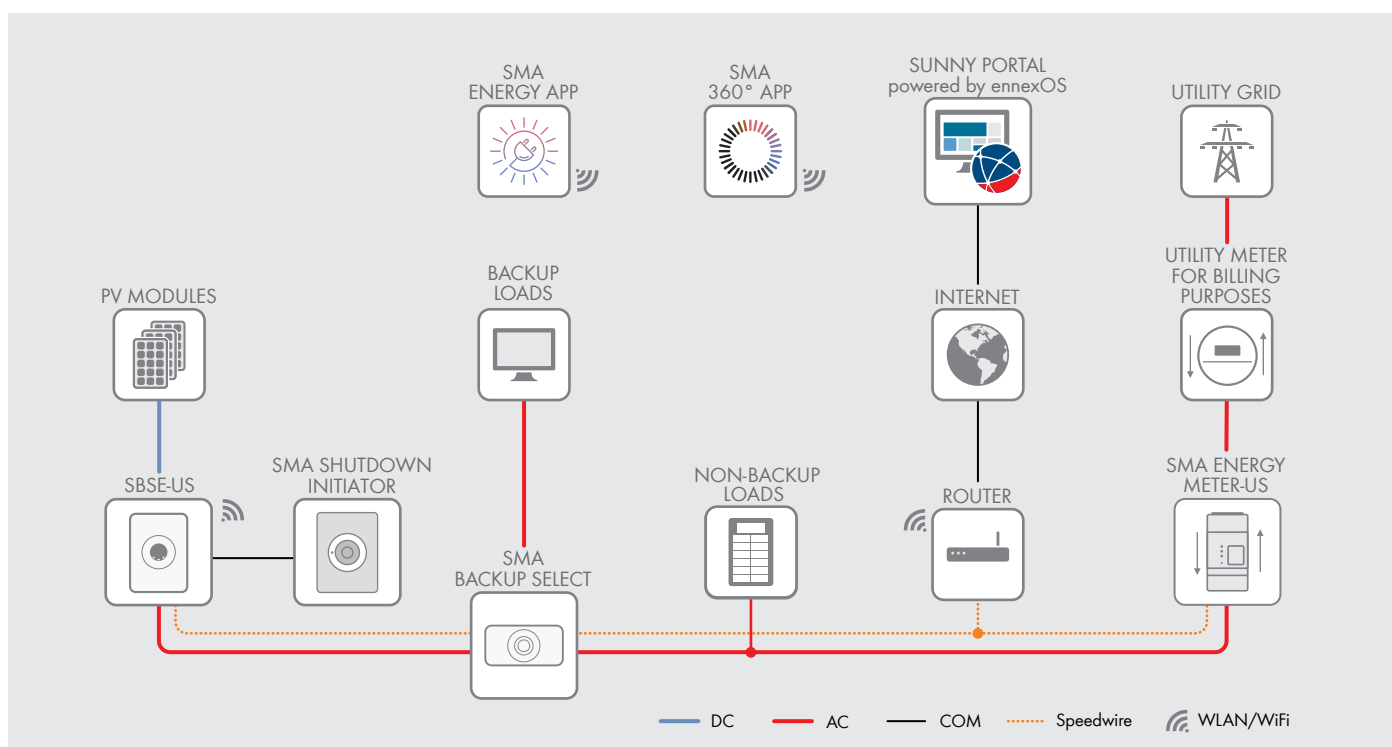

Technical data	SMA Backup Select SBSE 3.8 – 7.7	SMA Backup Select SBSE 9.6 – 11.5
<b>Operation</b>		
Input Voltage	240 (120 V)	
AC Frequency	60 Hz	
Max. Rated output current	32 A	48 A
Overcurrent protection		
<b>Backup Power</b>		
Rated power (120 V, 60Hz)	3840 W	5760 W
AC Voltage output	120 V	
AC frequency	60 Hz	
Activation mode	Automatic	
Switchover times (adjustable parameters)		
Interruption of load supply during the transition from automatic backup to feed-in operation	0 s to 60 s (default: 5 s)	
Minimum duration of grid fault for start of automatic backup operation	0 s to 600 s (default: 5 s)	
<b>Compatible with the following inverters</b>		
Sunny Boy Smart Energy	SBSE 3.8 - 7.7 - US-50	SBSE 9.6 - 11.4 - US-50
<b>General Data</b>		
Dimensions (W/H/D)	14 x 23 x 9 in (350 x 580 x 220mm)	
Weight	15.5 lbs (7kg)	
Integrated Subpanel	Subpanel for 7 circuit breakers	
Installation location	Indoor/Outdoor	
Mounting	Wall bracket	
Environmental protection rating	NEMA 3R	
Operating temperature range	-40°F to +131°F (-40°C to +55°C)	
Maximum altitude above sea level	3000 m	
Relative humidity	0% to 100%	
Warranty	2 years	
Type Designation	BU-SLCT-US-50	

● Standard features ○ Optional — Not available Specifications at nominal conditions Last revised: 07/2025