



SMA Home Storage

Ease of installation. Long lifetime.
Seamless integration.



Future-proof electricity storage system

- Developed for intensive use
- Ready for future, like dynamic tariffs and virtual power plants (VPP)
- Integrated black start function for back-up supply (when combined with the SMA hybrid inverter)
- 10 years of warranty¹⁾

Easy installation, fast commissioning

- Plug and play solution, including automatic commissioning
- Preassembled cables for an easy installation
- Expandable capacity possible within 2 years

Unmatched flexibility


- Compatible with SMA's hybrid inverters
- Slim, stackable design that can be scaled from 3.2 kWh to 19.6 kWh
- Floor, wall or back-to-back mounting
- Outdoor installation possible (Protection class IP65)

The SMA Home Storage Solution allows homeowners to unlock the full potential of sustainable energy. Integrating the SMA Home Storage battery makes the modular solution complete: everything from a single source. It perfectly complements SMA's hybrid inverters enabling energy solutions of today and tomorrow.

Whether during times of low solar irradiation or the highs of mid-day – the SMA Home Storage can store solar power and make it available as needed.

It offers flexible scalability to be adapted to individual needs. With the SMA Home Storage, homeowners are making a conscious choice for quality and additional security with the 10-year warranty¹⁾.

¹⁾ Device registration via the SMA product registration at my.sma-service.com required within 30 days after initial commissioning. The conditions of the SMA limited factory warranty apply. You can find additional information at SMA-solar.com.

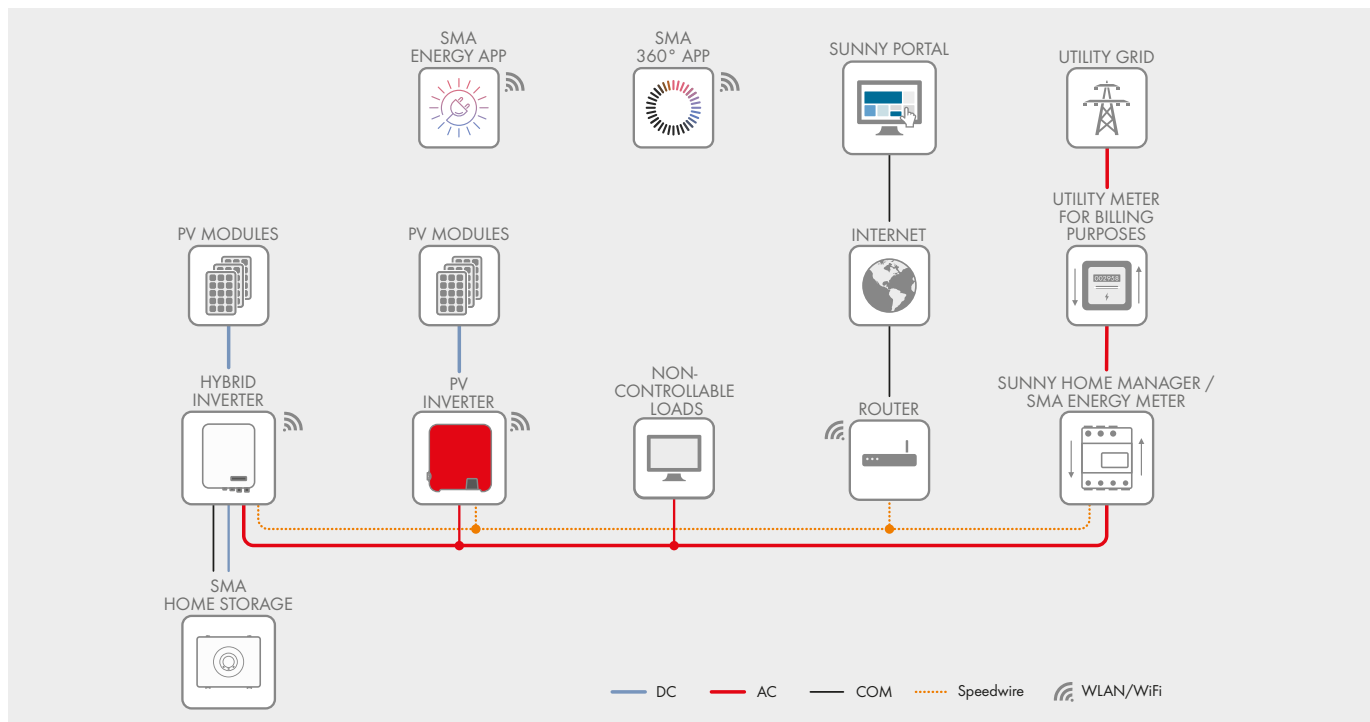

Technical data	SMA Home Storage 3.2	SMA Home Storage 6.5	SMA Home Storage 9.8	SMA Home Storage 13.1	SMA Home Storage 16.4	SMA Home Storage 19.6
Electrical						
Usable energy capacity ¹⁾	3.28 kWh	6.56 kWh	9.84 kWh	13.12 kWh	16.40 kWh	19.68 kWh
Nominal voltage	96 V	192 V	288 V	384 V	480 V	576 V
Operating voltage range	90 V to 108 V	180 V to 216 V	270 V to 324 V	360 V to 432 V	450 V to 540 V	540 V to 648 V
Max. charging / discharging current	36 A					
General data						
Dimensions ²⁾ (W/H/D)	610 × 483 × 214.6 mm	2 x (610 × 483 × 214.6 mm)	3 x (610 × 483 × 214.6 mm)	4 x (610 × 483 × 214.6 mm)	5 x (610 × 483 × 214.6 mm)	6 x (610 × 483 × 214.6 mm)
Weight	38 kg	76 kg	114 kg	152 kg	190 kg	228 kg
Operating temperature discharging / charging	−10 °C to 50 °C / 0 °C to 50 °C					
Self-consumption (at night) per module	2 W					
Degree of protection (according to IEC 60529)	IP 65					
Max. permissible value for relative humidity (non-condensing)	5% to 95%					
Cell technology	Lithium Iron Phosphate (LiFePO4)					
Efficiency						
Battery efficiency	94.5%					
Protective devices						
Input-side disconnection point	●					
DC reverse polarity protection	●					
Overvoltage category battery / inverter	II / II					
Equipment						
DC connection	MC4					
Interface / Communication	RJ45					
Communication protocols	SMA battery interface					
Warranty: 2/10 years	● / ● ³⁾					
Certificates and permits (more available upon request)	CE, UN38.3, IEC62619, IEC 62477, VDE2510-50					
Compatible SMA products ⁴⁾	SB-SE STPH 5-15	SB-SE STPH 5-15 and STPH 20-30 STP-SE				STPH 20-30
Accessories	Base unit for floor mounting (HS-BU-10), Communication cable to STP-SE (HS-COM-CBL-3-10), Top cover (HS-TC-10)					
Type designation	HS-BM-3.28-10	2 x HS-BM-3.28-10	3 x HS-BM-3.28-10	4 x HS-BM-3.28-10	5 x HS-BM-3.28-10	6 x HS-BM-3.28-10

● Standard equipment ○ Optional – Not available Data at nominal conditions Last revised: 08/2026

1) Under specific test conditions (100% DOD, 0.2 C charge and discharge at +25 °C).

2) Dimensions for wall mounting. Dimensions with optional base unit can be found in the product manual.

3) Device registration via the SMA product registration at my.sma-service.com required within 30 days after initial commissioning. The conditions of the SMA limited factory warranty apply. You can find additional information at SMA-solar.com.

4) Detailed information on battery compatibility can be found in the technical specifications for the corresponding inverter.