

MV Power Station

4000-S2 / 4200-S2 / 4400-S2 / 4600-S2

Turnkey solution for PV and battery-storage power plants



Robust

- Station and all individual components type-tested
- Galvanized base frame for extreme ambient conditions

Easy to use

- Turn-key solution
- Fully pre-assembled for easy setup and commissioning

Cost effective

- Lower specific costs thanks to high power classes
- Minimal coordination required during planning and installation
- Low transport costs thanks to 20-foot platform

Flexible

- One design for the whole world
- Numerous options

With the power of the robust central inverters Sunny Central UP or Sunny Central Storage UP and the perfectly matched medium-voltage components, the MV Power Station offers high power density and is a turnkey solution available worldwide.

Ideal for use in the new generation of PV and battery-storage power plants with 1500 V_{DC}, the integrated system solution is easy to transport and quick to assemble and commission. The MVPS and all components are type-tested. The MV Power Station combines rigorous plant safety with maximum energy yield and minimized deployment and operating risk.

Now also available with an environmentally friendly SF6-free medium-voltage switchgear – as a sustainable contribution to climate protection.

MV POWER STATION

4000-S2 / 4200-S2 / 4400-S2 / 4600-S2

Technical data	MVPS 4000-S2	MVPS 4200-S2
Input (DC)		
Available inverters	1 x SC 4000 UP or 1 x SCS 3450 UP or 1 x SCS 3450 UP-XT	1 x SC 4200 UP or 1 x SCS 3600 UP or 1 x SCS 3600 UP-XT
Max. input voltage	1500 V	1500 V
Number of DC inputs	Depending on selected inverter	
Integrated zone monitoring	○	
Output (AC) on the medium-voltage side		
Nominal power at SC UP (from -25 °C to +35 °C / 40 °C; optional 50 °C) ¹⁾	4000 kVA / 3600 kVA	4200 kVA / 3780 kVA
Nominal power at SCS UP (from -25 °C to +25 °C / 40 °C; optional 50 °C) ¹⁾	3450 kVA / 2930 kVA	3620 kVA / 3075 kVA
Charging power at SCS UP-XT (from -25 °C to +25 °C / 40 °C; optional 50 °C) ¹⁾	3589 kVA / 3001 kVA	3769 kVA / 3152 kVA
Discharging power at SCS UP-XT (from -25 °C to +25 °C / 40 °C; optional 50 °C) ¹⁾	4000 kVA / 3400 kVA	4200 kVA / 3570 kVA
Typical nominal AC voltages with a permanent tolerance of +/-10%	10 kV to 36 kV	10 kV to 36 kV
AC power frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11 / YNy0	● / ○ / ○	● / ○ / ○
Transformer cooling method	KNAN ²⁾	KNAN ²⁾
Transformer standby power losses, industry standard / Eco design 1 / Eco design 2	● / ○ / ○	● / ○ / ○
Transformer short-circuit losses, industry standard / Eco design 1 / Eco design 2	● / ○ / ○	● / ○ / ○
Max. total harmonic distortion	< 3 %	
Reactive power feed-in (up to max. 60% of nominal power)	○	
Inverter efficiency		
Max. efficiency ³⁾ / Europ. efficiency ³⁾ / CEC efficiency ⁴⁾	98.8 % / 98.6 % / 98.5 %	98.8 % / 98.7 % / 98.5 %
Protective devices		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	Medium-voltage vacuum circuit breaker	
DC overvoltage protection	Surge arrester, type I	
Galvanic isolation	●	
Arc fault resistance medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s	
General data		
Dimensions (W / H / D)	6058 mm / 2896 mm / 2438 mm	
Weight	< 18 t	
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW	
Self-consumption (stand-by) ¹⁾	< 370 W	
Ambient temperature -25 °C to +45 °C / -25 °C to +55 °C / -35 °C to +55 °C / -40 °C to +45 °C	● / ○ / ○ / ○	
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP54	
Environment: standard / harsh / harsh+	● / ○ / ○	
Maximum permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month / year) / 0% to 95%	
Max. operating altitude above MSL 1000 m / 2000 m / 3000 m	● / ○ / ○	● / ○ / –
Inverter fresh air consumption	6500 m³/h	
Equipment		
DC connection	Lug	
AC connection	Outer-cone angle plug	
Monitoring package	○	
Station enclosure color	RAL 7004	
Transformer for external loads: without / 10 / 20 / 30 / 40 / 50 / 60 kVA	● / ○ / ○ / ○ / ○ / ○ / ○	
Fuses for external transformers: without / 120 kVA / 180 kVA	● / ○ / ○	
MV switchgear: without / 1 panel / 3 panels / 630 A / 800 A		
2 cable panels with load-break switch, 1 transformer panel with circuit breaker, arc fault resistance IAC A FL 20 kA 1 s to IEC 62271-200	● / ○ / ○ / ○ / ○	
MV switchgear short-circuit current capability (20 kA 1 s / 20 kA 3 s / 25 kA 1 s)	● / ○ / ○	
Accessory for MV switchgear: without / auxiliary contacts / motor for transformer panel / cascade control / monitoring	● / ○ / ○ / ○ / ○	
Integrated oil spill containment: without/with	● / ○	
Industry standards (other industry standards: see inverter datasheet)	IEC 60076, IEC 62271-200, IEC 62271-202, EN50588-1, CSC certificate	
Type designation	MVPS-4000-S2-10	MVPS-4200-S2-10

● Standard features ○ Optional features – Not available *) preliminary

1) Data based on inverter. Further details can be found in the inverter data sheet.

2) KNAN = ester with natural air cooling

3) Efficiency measured at inverter without internal power supply

4) Efficiency measured at inverter with internal power supply

Technical data	MVPS 4400-S2	MVPS 4600-S2
Input (DC)		
Available inverters	1 x SC 4400 UP or 1 x SCS 3800 UP or 1 x SCS 3800 UP-XT or 1 x SCS 4400 UP-S	1 x SC 4600 UP or 1 x SCS 3950 UP or 1 x SCS 3950 UP-XT or 1 x SCS 4600 UP-S
Max. input voltage	1500 V	1500 V
Number of DC inputs	Depending on selected inverter	
Integrated zone monitoring	○	
Output (AC) on the medium-voltage side		
Nominal power at SC UP (from -25 °C to +35 °C / 40 °C; optional 50 °C) ¹⁾	4400 kVA / 3960 kVA	4600 kVA / 4140 kVA
Nominal power at SCS UP (from -25 °C to +25 °C / 40 °C; optional 50 °C) ¹⁾	3800 kVA / 3230 kVA	3960 kVA / 3365 kVA
Charging power at SCS UP-XT (from -25 °C to +25 °C / 40 °C; optional 50 °C) ¹⁾	3949 kVA / 3302 kVA	4129 kVA / 3453 kVA
Discharging power at SCS UP-XT (from -25 °C to +25 °C / 40 °C; optional 50 °C) ¹⁾	4400 kVA / 3740 kVA	4600 kVA / 3910 kVA
Nominal power at SCS UP-S (from -25 °C to +35 °C / 40 °C; optional 50 °C) ¹⁾	4400 kVA* / 3960 kVA*	4600 kVA* / 4140 kVA*
Typical nominal AC voltages with a permanent tolerance of +/-10%	10 kV to 36 kV	10 kV to 36 kV
AC power frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11 / YNy0	● / ○ / ○	● / ○ / ○
Transformer cooling method	KNAN ²⁾	KNAN ²⁾
Transformer standby power losses, industry standard / Eco design 1 / Eco design 2	● / ○ / ○	● / ○ / ○
Transformer short-circuit losses, industry standard / Eco design 1 / Eco design 2	● / ○ / ○	● / ○ / ○
Max. total harmonic distortion	< 3 %	
Reactive power feed-in (up to max. 60% of nominal power)	○	
Inverter efficiency		
Max. efficiency ³⁾ / Europ. efficiency ³⁾ / CEC efficiency ⁴⁾	98.8 % / 98.7 % / 98.5 %	98.8 % / 98.7 % / 98.5 %
Protective devices		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	Medium-voltage vacuum circuit breaker	
DC overvoltage protection	Surge arrester, type I	
Galvanic isolation	●	
Arc fault resistance medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s	
General data		
Dimensions (W / H / D)	6058 mm / 2896 mm / 2438 mm	
Weight	< 18 t	
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW	
Self-consumption (stand-by) ¹⁾	< 370 W	
Ambient temperature -25 °C to +45 °C / -25 °C to +55 °C / -35 °C to +55 °C / -40 °C to +45 °C	● / ○ / ○ / ○	
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP54	
Environment: standard / harsh / harsh+	● / ○ / ○	
Maximum permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month / year) / 0% to 95%	
Max. operating altitude above MSL 1000 m / 2000 m / 3000 m	● / ○ / –	
Inverter fresh air consumption	6500 m³/h	
Equipment		
DC connection	Lug	
AC connection	Outer-cone angle plug	
Monitoring package	○	
Station enclosure color	RAL 7004	
Transformer for external loads: without / 10 / 20 / 30 / 40 / 50 / 60 kVA	● / ○ / ○ / ○ / ○ / ○ / ○	
Fuses for external transformers: none / 120 kVA / 180 kVA	● / ○ / ○	
MV switchgear: without / 1 panel / 3 panels / 630 A / 800 A		
2 cable panels with load-break switch, 1 transformer panel with circuit breaker, arc fault resistance IAC A FL 20 kA 1 s to IEC 62271-200	● / ○ / ○ / ○ / ○	
MV switchgear short-circuit current capability (20 kA 1 s / 20 kA 3 s / 25 kA 1 s)	● / ○ / ○	
Accessory for MV switchgear: without / auxiliary contacts / motor for transformer panel / cascade control / monitoring	● / ○ / ○ / ○ / ○	
Integrated oil spill containment: without/with	● / ○	
Industry standards (other industry standards: see inverter datasheet)	IEC 60076, IEC 62271-200, IEC 62271-202, EN50588-1, CSC certificate	
Type designation	MVPS-4400-S2-10	MVPS-4600-S2-10

● Standard features ○ Optional features – Not available *) preliminary


1) Data based on inverter Further details can be found in the inverter datasheet.

2) KNAN = ester with natural air cooling

3) Efficiency measured at inverter without internal power supply

4) Efficiency measured at inverter with internal power supply

Plant diagram with Sunny Central UP

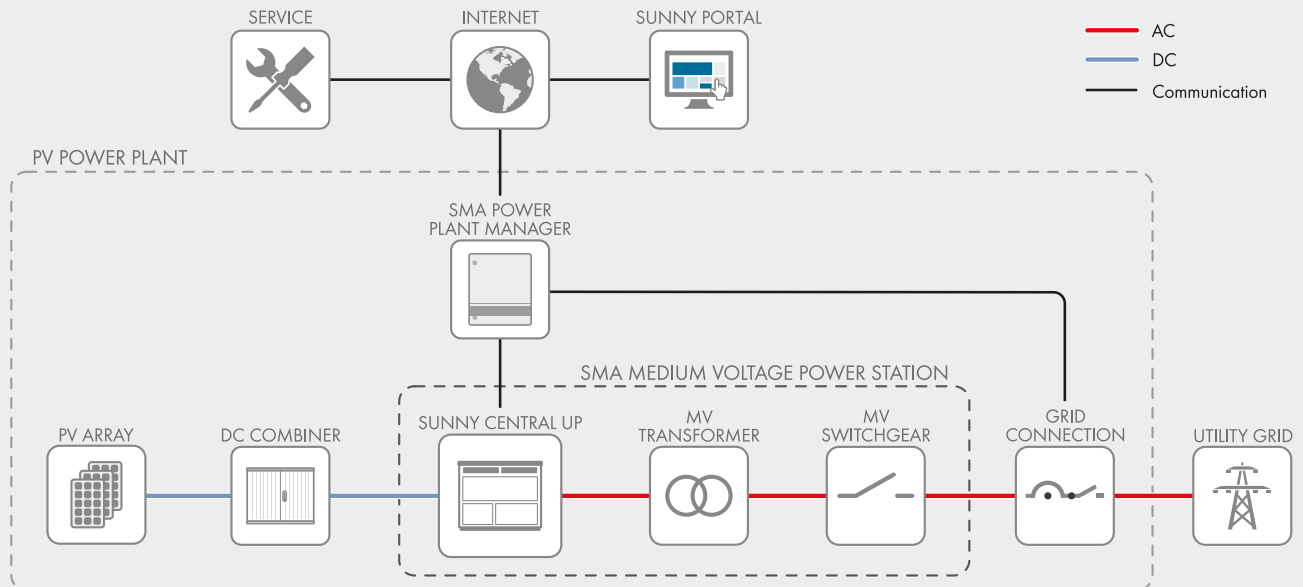

Plant diagram with Sunny Central Storage UP

