



Sunny Central

2000 / 2475

More power per cubic meter

/ Full power up to 35 °C

Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Overdimensioning up to 225% is possible
- Full power at ambient temperatures of up to 35 °C

Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

Flexible

- Conforms to all known grid requirements worldwide
- Q on demand
- Available as a single device or turnkey solution, including medium-voltage block

Easy to Use

- Improved DC connection area
- Connection area for customer equipment
- Integrated voltage support for internal and external loads

With an output of up to 2475 kVA and system voltage of 1100 V DC, the SMA central inverter allows for more efficient system design and a reduction in specific costs for PV power plants.

A separate voltage supply and additional space are available for the installation of customer equipment. True 1100 V technology and the intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature as well as a long service life of 25 years.

Technical Data	Sunny Central 2200	Sunny Central 2475
Input (DC)		
MPP voltage range V_{DC} (at 25 °C / at 35 °C / at 50 °C)	570 to 950 V / 800 V / 800 V	638 V to 950 V / 800 V / 800 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	545 V / 645 V	614 V / 714 V
Max. input voltage $V_{DC, max}$	1100 V	1100 V
Max. input current $I_{DC, max}$ (at 35 °C / at 50 °C)	3960 A / 3600 A	3960 A / 3600 A
Max. short-circuit current $I_{DC, sc}$	6400 A	6400 A
Number of DC inputs	24 double pole fused (32 single pole fused)	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Output (AC)		
Nominal AC power at $\cos \phi = 1$ (at 35 °C / at 50 °C)	2200 kVA / 2000 kVA	2475 kVA / 2250 kVA
Nominal AC power at $\cos \phi = 0.8$ (at 35 °C / at 50 °C)	1760 kW / 1600 kW	1980 kW / 1800 kW
Nominal AC current $I_{AC, nom} = \text{Max. output current } I_{AC, max}$	3300 A	3300 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	385 V / 308 V to 462 V	434 V / 347 V to 521 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals ⁹⁾	> 2	
Power factor at rated power / displacement power factor adjustable ^{8) 10)}	● 1 / 0.8 overexcited to 0.8 underexcited ○ 1 / 0.0 overexcited to 0.0 underexcited	
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.6% / 98.4% / 98.0%	98.6% / 98.4% / 98.0%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP65 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3400 kg / < 7496 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 300 W	
Internal auxiliary power supply	Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	-25 °C to 60 °C / -13 °F to 140 °F	
Noise emission ⁷⁾	64.7 dB(A)	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾ / 4000 m ¹¹⁾	● / ○ / ○ / ○	
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, VDE AR-N 4110/4120, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC / EN 61000-6-2, FCC Part 15 Class A, Cisp 11, DIN EN55011:2017	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
Type designation	SC-2200-10	SC-2475-10

● Standard features ○ Optional

1) At nominal AC voltage, nominal AC power decreases in the same proportion

2) Efficiency measured without internal power supply

3) Efficiency measured with internal power supply

4) Self-consumption at rated operation

5) Self-consumption at < 75% Pn at 25 °C

6) Self-consumption averaged out from 5% to 100% Pn at 25 °C

7) Sound pressure level at a distance of 10 m


8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.

9) A short-circuit ratio of < 2 requires a special approval from SMA


10) Depending on the DC voltage

11) Earlier temperature-dependent de-rating and reduction of DC open-circuit voltage

SYSTEM DIAGRAM

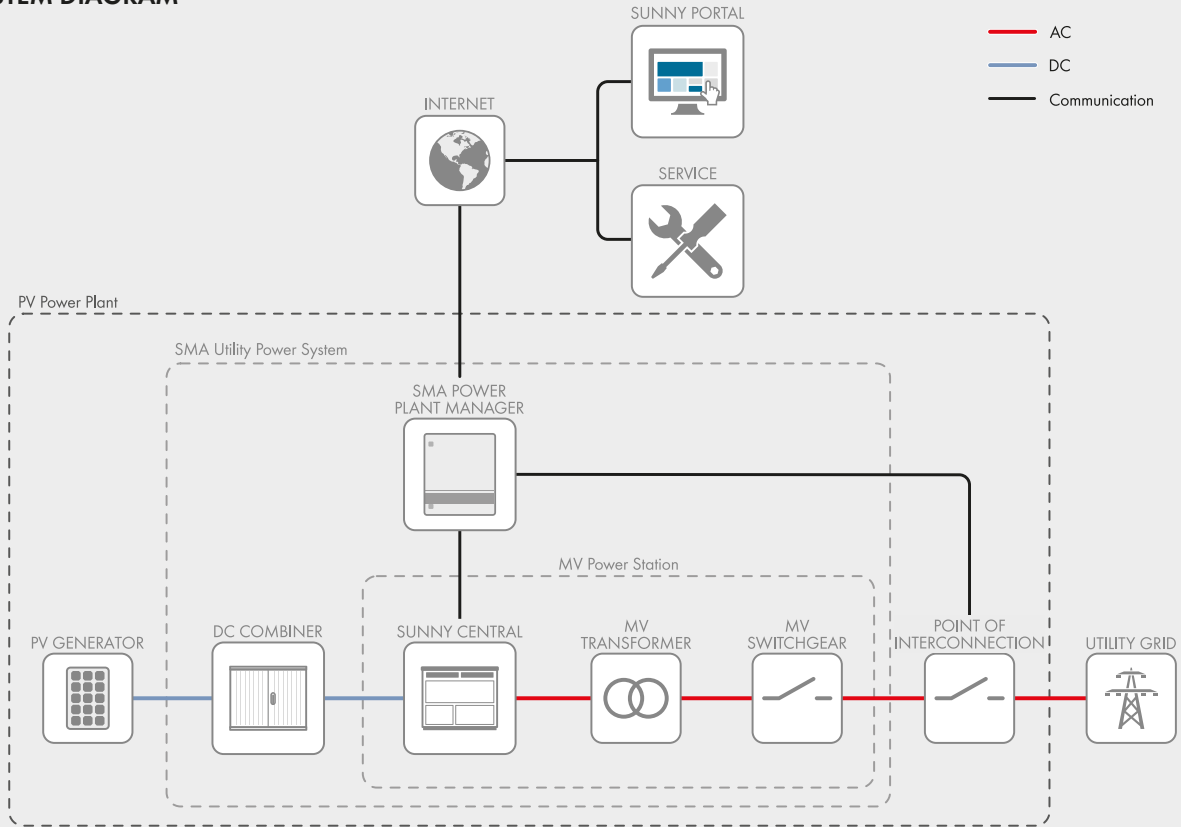

TEMPERATURE BEHAVIOR (at $\cos \varphi = 1$ and installation altitudes of up to 1,000 m*)

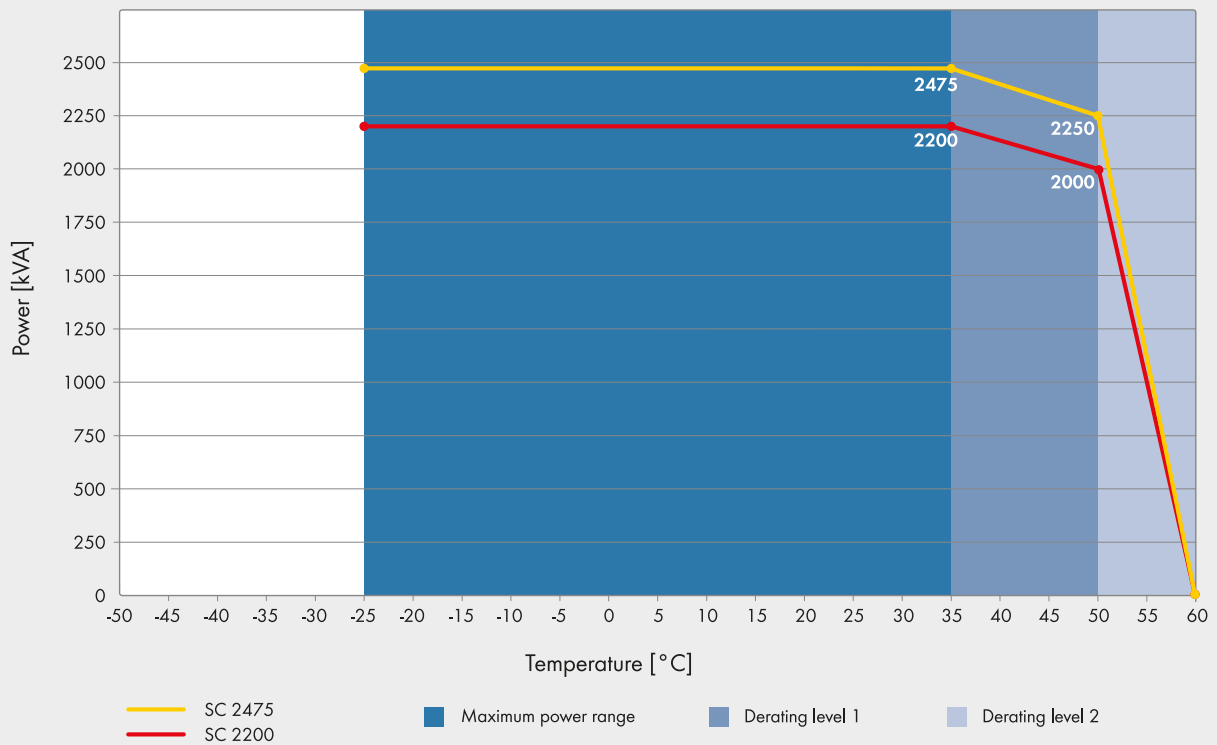

*) For the temperature behavior for installations at above 1,000 m see the Technical Information document.

