

# SUNNY CENTRAL

## 4000 UP-US / 4200 UP-US / 4400 UP-US / 4600 UP-US



### Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Over-sizing up to 180% is possible
- Full power at ambient temperatures of up to 35°C

### Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

### Flexible

- Conforms to all known grid requirements worldwide
- Q on demand
- DC-coupled storage with optional charging from grid

### Easy to Use

- Improved DC connection area
- Connection area for customer equipment
- Integrated voltage support for internal and external loads

## SUNNY CENTRAL

### 4000 UP-US / 4200 UP-US / 4400 UP-US / 4600 UP-US

The new Sunny Central: more power per cubic meter

With an output of up to 4600 kVA and system voltages of 1500 V DC, the SMA central inverter allows for more efficient system design and a reduction in specific costs for PV power plants. A separate voltage supply and additional space are available for the installation of customer equipment. True 1500 V technology and the intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature as well as a long service life of 25 years.

# SUNNY CENTRAL 4000 UP-US / 4200 UP-US

Technical data	SC 4000 UP-US	SC 4200 UP-US
<b>Input (DC)</b>		
MPP voltage range $V_{DC}$ (at 25 °C / at 50 °C)	880 to 1325 V / 1050 V	921 to 1325 V / 1050 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	849 V / 1030 V	891 V / 1071 V
Max. input voltage $V_{DC, max}$	1500 V	1500 V
Max. input current $I_{DC, max}$	4750 A	4750 A
Max. short-circuit current $I_{DC, sc}$	8400 A	8400 A
Number of DC inputs	24 double pole fused (32 single pole fused)	
Number of DC inputs with optional DC coupling of battery	18 double pole fused (36 single pole fused) for PV, 6 double pole fused for batteries	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm <sup>2</sup>	
Integrated zone monitoring	○	
Available PV fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Available battery fuse size (per input)	750 A	
<b>Output (AC)</b>		
Nominal AC power at $\cos \phi = 1$ (at 35 °C / at 50 °C)	4000 kVA <sup>11)</sup> / 3600 kVA	4200 kVA <sup>11)</sup> / 3780 kVA
Nominal AC power at $\cos \phi = 0.8$ (at 35 °C / at 50 °C)	3200 kW <sup>11)</sup> / 2880 kW	3360 kW <sup>11)</sup> / 3024 kW
Nominal AC current $I_{AC, nom}$ (at 35 °C / at 50 °C)	3850 A / 3465 A	3850 A / 3465 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / nominal AC voltage range <sup>1)</sup> 8)	600 V / 480 V to 720 V	630 V / 504 V to 756 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals <sup>9)</sup>	> 2	
Power factor at rated power / displacement power factor adjustable <sup>9)</sup> 10)	1 / 0.8 overexcited to 0.8 underexcited	
<b>Efficiency</b>		
Max. efficiency <sup>2)</sup> / European efficiency <sup>2)</sup> / CEC efficiency <sup>3)</sup>	98.8% / 98.6% / 98.5%	98.8% / 98.7% / 98.5%
<b>Protective Devices</b>		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection	NEMA 3R	
<b>General Data</b>		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8158 lb	
Self-consumption (max. <sup>4)</sup> / partial load <sup>5)</sup> / average <sup>6)</sup>	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal auxiliary power supply	○ Integrated 8.4 kVA transformer	
Operating temperature range (optional) <sup>8)</sup>	(-37 °C) -25 °C to 60 °C / (-37 °C) -13 °F to 140 °F	
Noise emission <sup>7)</sup>	65.0 dB(A)*	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL <sup>8)</sup> 1000 m / 2000 m	● / ○ (earlier temperature-dependent derating)	
Fresh air consumption	6500 m <sup>3</sup> /h	
<b>Features</b>		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	UL 62109-1, UL 1741 (Chapter 31, CDR 61), NERC, UL 1741-SB, UL 1998, IEEE 1547-2018 <sup>12)</sup> , MIL-STD-810G	
EMC standards	FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional		

1) At nominal AC voltage, nominal AC power decreases in the same proportion

2) Efficiency measured without internal power supply

3) Efficiency measured with internal power supply

4) Self-consumption at rated operation

5) Self-consumption at < 75% P<sub>n</sub> at 25 °C

6) Self-consumption averaged out from 5% to 100% P<sub>n</sub> at 25 °C

7) Sound pressure level at a distance of 10 m

8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.

9) A short-circuit ratio of < 2 requires a special approval from SMA

10) Depending on the DC voltage

11) Nominal power at 35 °C max DC voltage of 1050 V

12) Harmonics are within IEEE 1547-2018 limits with at least 2 inverters in operation

# SUNNY CENTRAL 4400 UP-US / 4600 UP-US

Technical data	SC 4400 UP-US	SC 4600 UP-US
<b>Input (DC)</b>		
MPP voltage range $V_{DC}$ (at 25 °C / at 50 °C)	962 to 1325 V / 1050 V	1003 to 1325 V / 1050 V
Min. input voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	934 V / 1112 V	976 V / 1153 V
Max. input voltage $V_{DC, max}$	1500 V	1500 V
Max. input current $I_{DC, max}$	4750 A	4750 A
Max. short-circuit current $I_{DC, sc}$	8400 A	8400 A
Number of DC inputs	24 double pole fused (32 single pole fused)	
Number of DC inputs with optional DC coupling of battery	18 double pole fused (36 single pole fused) for PV, 6 double pole fused for batteries	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm <sup>2</sup>	
Integrated zone monitoring	○	
Available PV fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Available battery fuse size (per input)	750 A	
<b>Output (AC)</b>		
Nominal AC power at $\cos \phi = 1$ (at 35 °C / at 50 °C)	4400 kVA <sup>11)</sup> / 3960 kVA	4600 kVA <sup>11)</sup> / 4140 kVA
Nominal AC power at $\cos \phi = 0.8$ (at 35 °C / at 50 °C)	3520 kW <sup>11)</sup> / 3168 kW	3680 kW <sup>11)</sup> / 3312 kW
Nominal AC current $I_{AC, nom}$ (at 35 °C / at 50 °C)	3850 A / 3465 A	3850 A / 3465 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / nominal AC voltage range <sup>1) 8)</sup>	660 V / 528 V to 759 V	690 V / 552 V to 759 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals <sup>9)</sup>	> 2	
Power factor at rated power / displacement power factor adjustable <sup>8) 10)</sup>	1 / 0.8 overexcited to 0.8 underexcited	
<b>Efficiency</b>		
Max. efficiency <sup>2)</sup> / European efficiency <sup>2)</sup> / CEC efficiency <sup>3)</sup>	98.8% / 98.7% / 98.5%	98.9% / 98.7% / 98.5%
<b>Protective Devices</b>		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection	NEMA 3R	
<b>General Data</b>		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8158 lb	
Self-consumption (max. <sup>4)</sup> / partial load <sup>5)</sup> / average <sup>6)</sup>	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal auxiliary power supply	○ Integrated 8.4 kVA transformer	
Operating temperature range (optional) <sup>8)</sup>	(-37 °C) -25 °C to 60 °C / (-37 °C) -13 °F to 140 °F	
Noise emission <sup>7)</sup>	65.0 dB(A)*	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL <sup>8)</sup> 1000 m / 2000 m	● / ○ (earlier temperature-dependent derating)	
Fresh air consumption	6500 m <sup>3</sup> /h	
<b>Features</b>		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	UL 62109-1, UL 1741 (Chapter 31, CDR 61), NERC, UL 1741-SB, UL 1998, IEEE 1547-2018 <sup>12)</sup> , MIL-STD-810G	
EMC standards	FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional		

1) At nominal AC voltage, nominal AC power decreases in the same proportion

2) Efficiency measured without internal power supply

3) Efficiency measured with internal power supply

4) Self-consumption at rated operation

5) Self-consumption at < 75% P<sub>n</sub> at 25 °C

6) Self-consumption averaged out from 5% to 100% P<sub>n</sub> at 25 °C

7) Sound pressure level at a distance of 10 m

8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.


9) A short-circuit ratio of < 2 requires a special approval from SMA

10) Depending on the DC voltage


11) Nominal power at 35 °C max DC voltage of 1050 V

12) Harmonics are within IEEE 1547-2018 limits with at least 2 inverters in operation

# SYSTEM DIAGRAM

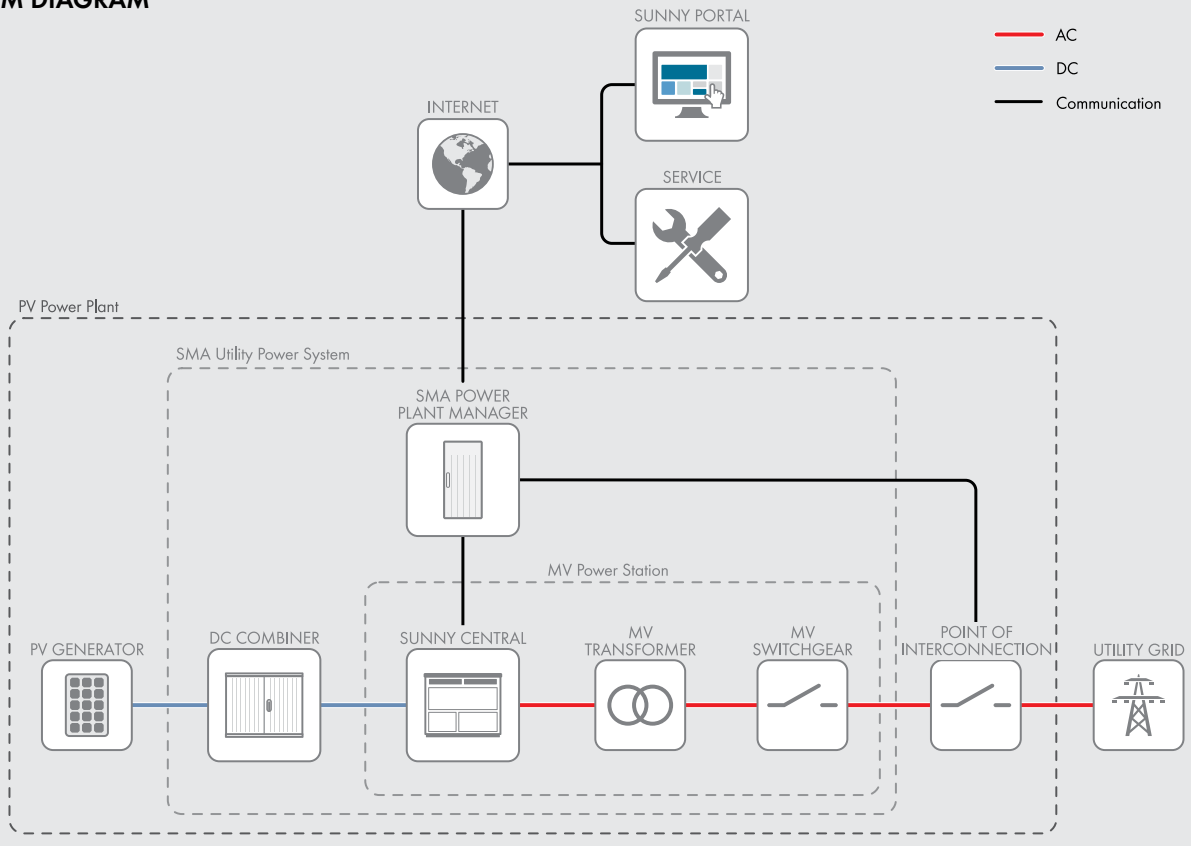

# TEMPERATURE BEHAVIOR (at 1000 m)

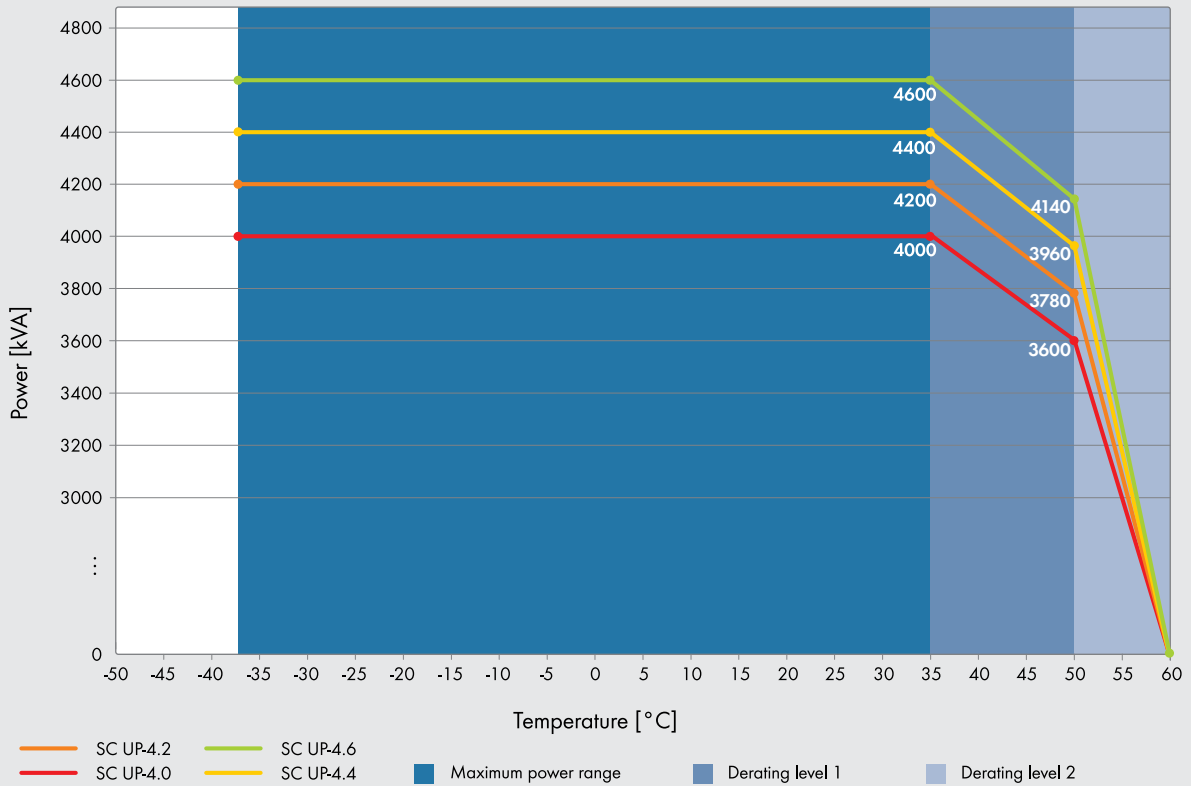

SCXXXXUP-US-DS-en-27 All products and services described and all technical data are subject to change, even for reasons of country-specific deviations, at any time without notice. SMA assumes no liability for typographical or other errors. For current information, please see www.SMA-Solar.com.