

Efficiency and Derating

**SUNNY BOY / SUNNY BOY SMART ENERGY / SUNNY BOY STORAGE / SUNNY ISLAND /
SUNNY TRIPOWER / SUNNY TRIPOWER STORAGE X / SUNNY TRIPOWER SMART ENERGY /
SUNNY HIGHPOWER / eCHARGER**

Table of Contents

1	Information on this Document.....	5
1.1	Validity.....	5
1.2	Target Group	5
1.3	Explanation of Used Terms	5
2	SMA eCharger	7
2.1	EVC22-3AC-20.....	7
2.1.1	Derating behavior	7
3	Sunny Boy.....	8
3.1	SB1.5-1VL-40.....	8
3.1.1	Efficiency.....	8
3.1.2	Derating Behavior	9
3.2	SB2.0-1VL-40.....	10
3.2.1	Efficiency.....	10
3.2.2	Derating Behavior	11
3.3	SB2.5-1VL-40.....	12
3.3.1	Efficiency.....	12
3.3.2	Derating Behavior	13
3.4	SB3.0-1AV-41	14
3.4.1	Efficiency.....	14
3.4.2	Derating Behavior	15
3.5	SB3.6-1AV-41	16
3.5.1	Efficiency.....	16
3.5.2	Derating Behavior	17
3.6	SB4.0-1AV-41	18
3.6.1	Efficiency.....	18
3.6.2	Derating Behavior	19
3.7	SB5.0-1AV-41	20
3.7.1	Efficiency.....	20
3.7.2	Derating Behavior	21
3.8	SB6.0-1AV-41	22
3.8.1	Efficiency.....	22
3.8.2	Derating Behavior	23
4	Sunny Boy Storage	24
4.1	SBS2.5-1VL-10.....	24
4.1.1	DC Efficiency	24
4.1.2	Derating Behavior	25
4.2	SBS3.7-10.....	26
4.2.1	DC Efficiency	26
4.2.2	Derating Behavior	27
4.3	SBS5.0-10.....	27
4.3.1	DC Efficiency	27
4.3.2	Derating Behavior	28
4.4	SBS6.0-10.....	29
4.4.1	DC Efficiency	29
4.4.2	Derating Behavior	30
5	Sunny Boy Smart Energy	31
5.1	SBSE3.6-50.....	31
5.1.1	Efficiency.....	31

5.1.2	Derating behavior	32
5.2	SBSE4.0-50	33
5.2.1	Efficiency	33
5.2.2	Derating behavior	34
5.3	SBSE5.0-50	35
5.3.1	Efficiency	35
5.3.2	Derating behavior	36
5.4	SBSE6.0-50	37
5.4.1	Efficiency	37
5.4.2	Derating behavior	38
6	Sunny Island.....	39
6.1	SI4.4M-13	39
6.1.1	Efficiency	39
6.1.2	Derating Behavior	40
6.2	SI6.0H-13	41
6.2.1	Efficiency	41
6.2.2	Derating Behavior	42
6.3	SI8.0H-13	43
6.3.1	Efficiency	43
6.3.2	Derating Behavior	44
7	Sunny Tripower.....	45
7.1	STP 12-50	45
7.1.1	Efficiency	45
7.1.2	Derating Behavior	46
7.2	STP 15-50	47
7.2.1	Efficiency	47
7.2.2	Derating Behavior	48
7.3	STP 20-50	49
7.3.1	Efficiency	49
7.3.2	Derating Behavior	50
7.4	STP 25-50	51
7.4.1	Efficiency	51
7.4.2	Derating Behavior	52
7.5	STP 50-41	53
7.5.1	Efficiency	53
7.5.2	Derating Behavior	54
7.6	STP 110-60	55
7.6.1	Efficiency	55
7.6.2	Derating Behavior	56
7.7	STP 125-70	57
7.7.1	Efficiency	57
7.7.2	Derating behavior	58
7.8	STP3.0-3AV-40	59
7.8.1	Efficiency when operating in TN or TT systems	59
7.8.2	Efficiency when operating in a Delta IT system	60
7.8.3	Derating Behavior	61
7.9	STP4.0-3AV-40	62
7.9.1	Efficiency when operating in TN or TT systems	62
7.9.2	Efficiency when operating in a Delta IT system	63
7.9.3	Derating Behavior	64
7.10	STP5.0-3AV-40	65
7.10.1	Efficiency when operating in TN or TT systems	65
7.10.2	Efficiency when operating in a Delta IT system	66

7.10.3	Derating Behavior	67
7.11	STP6.0-3AV-40	68
7.11.1	Efficiency when operating in TN or TT systems	68
7.11.2	Efficiency when operating in a Delta IT system	69
7.11.3	Derating Behavior	70
7.12	STP8.0-3AV-40	71
7.12.1	Efficiency when operating in TN or TT systems	71
7.12.2	Efficiency when operating in a Delta IT system	72
7.12.3	Derating Behavior	73
7.13	STP10.0-3AV-40	74
7.13.1	Efficiency when operating in TN or TT systems	74
7.13.2	Efficiency when operating in a Delta IT system	75
7.13.3	Derating Behavior	76
8	Sunny Tripower Storage X.....	77
8.1	STPS30-20	77
8.1.1	Efficiency.....	77
8.1.2	Derating Behavior	78
8.2	STPS50-20	79
8.2.1	Efficiency.....	79
8.2.2	Derating Behavior	80
9	Sunny Tripower Smart Energy.....	81
9.1	STP5.0-3SE-40	81
9.1.1	Efficiency.....	81
9.1.2	Derating Behavior	82
9.2	STP6.0-3SE-40	83
9.2.1	Efficiency.....	83
9.2.2	Derating Behavior	84
9.3	STP8.0-3SE-40	85
9.3.1	Efficiency.....	85
9.3.2	Derating Behavior	86
9.4	STP10.0-3SE-40.....	87
9.4.1	Efficiency.....	87
9.4.2	Derating Behavior	88
10	Sunny Highpower	89
10.1	SHP 100-21	89
10.1.1	Efficiency.....	89
10.1.2	Derating Behavior	90
10.2	STP 150-21	91
10.2.1	Efficiency.....	91
10.2.2	Derating Behavior	92
10.3	SHP 172-21	93
10.3.1	Efficiency.....	93
10.3.2	Derating Behavior	94
10.4	SHP 180-21	95
10.4.1	Efficiency.....	95
10.4.2	Derating Behavior	96

1 Information on this Document

1.1 Validity

This document describes in graphic and tabular form the efficiency profile and the derating behavior according to DIN EN 50524:2010 of the following SMA products: (status: Friday, September 27, 2024, subject to technical changes). The efficiency measurements were performed according to the requirements IEC 61683:1999, EN 61683:2000 and DIN EN 61683:2000.

Sunny Boy

- SB1.5-1VL-40 / SB2.0-1VL-40 / SB2.5-1VL-40
- SB3.0-1AV-41 / SB3.6-1AV-41 / SB4.0-1AV-41 / SB5.0-1AV-41 / SB6.0-1AV-41

Sunny Boy Smart Energy

- SBSE3.6-50 / SBSE4.0-50 / SBSE5.0-50 / SBSE6.0-50

Sunny Boy Storage

- SBS2.5-1VL-10
- SBS3.7-10 / SBS5.0-10 / SBS6.0-10

Sunny Island

- SI4.4M-13 / SI6.0H-13 / SI8.0H-13

Sunny Tripower

- STP 12-50 / STP 15-50 / STP 20-50 / STP 25-50
- STP 50-41
- STP 110-60
- STP3.0-3AV-40 / STP4.0-3AV-40 / STP5.0-3AV-40 / STP6.0-3AV-40 / STP8.0-3AV-40 / STP10.0-3AV-40
- STP 125-70

Sunny Tripower Storage X

- STPS30-20 / STPS50-20

Sunny Tripower Smart Energy

- STP5.0-3SE-40 / STP6.0-3SE-40 / STP8.0-3SE-40 / STP10.0-3SE-40

Sunny Highpower

- SHP 100-21 / SHP 150-21 / SHP 172-21 / SHP 180-21

SMA eCharger

- EVC22-3AC-20

1.2 Target Group

The information in this document is intended for installers and operators of PV systems with SMA products as well as for PV system planners.

1.3 Explanation of Used Terms

Efficiency Profile - Curve and Measured Values

The efficiency is the ratio of output power to input power and is given as a percentage value. This document describes the product efficiency in graphic and tabular form. The efficiency is given for the minimum MPP voltage, the rated input voltage and the maximum MPP voltage.

Maximum and European Weighted Efficiency

The maximum efficiency is the highest product efficiency at rated input voltage. The European weighted efficiency is calculated by weighing different partial load efficiencies and the full load efficiency at the rated input voltage according to the frequency in which they occur.

The calculation formula is: $\eta_{EU} = (0.03 \times \eta_{5\%}) + (0.06 \times \eta_{10\%}) + (0.13 \times \eta_{20\%}) + (0.1 \times \eta_{30\%}) + (0.48 \times \eta_{50\%}) + (0.2 \times \eta_{100\%})$


Derating Behavior

Safety mechanisms are implemented in the products protecting the products against damage due to too high ambient temperatures or too high output currents. This behavior reduces the product output power ("derating"). In this document, the derating behavior of the products is shown in graphic form. The derating behavior is given for the minimum MPP voltage, the rated input voltage and the maximum MPP voltage.

2 SMA eCharger

2.1 EVC22-3AC-20


2.1.1 Derating behavior

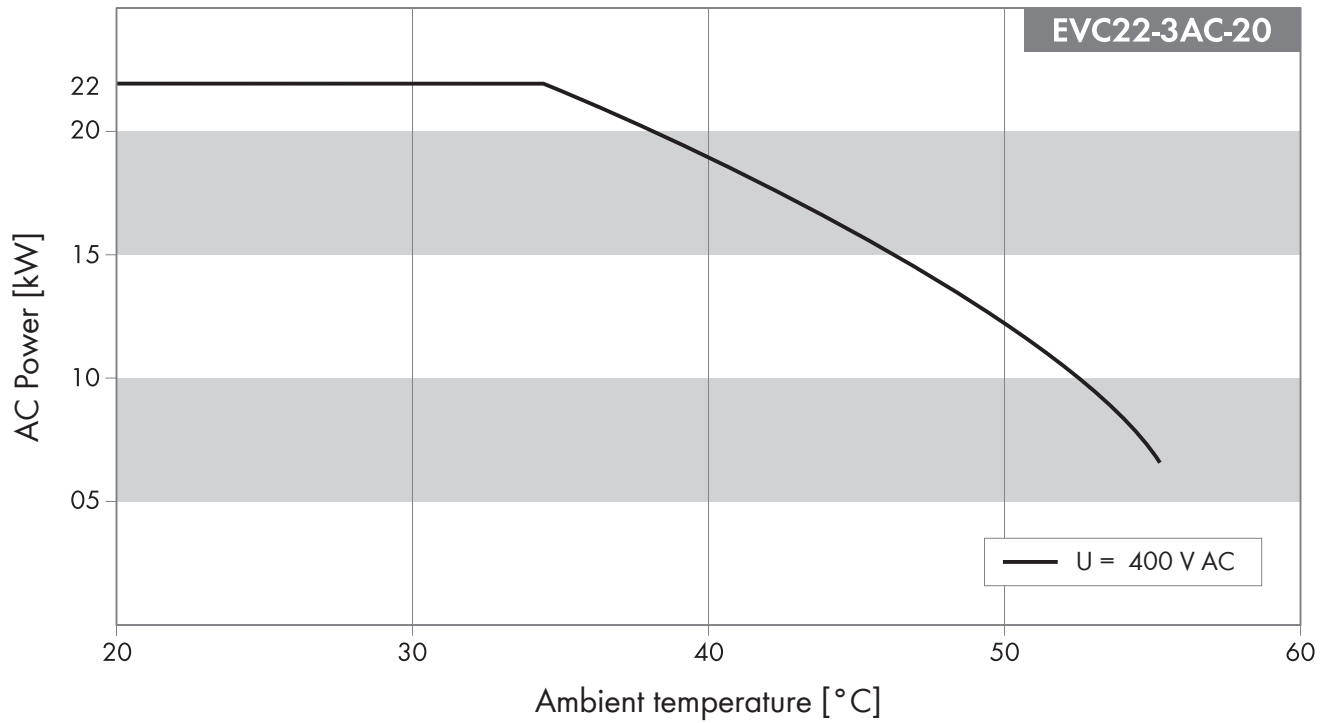

3 Sunny Boy

3.1 SB1.5-1VL-40

3.1.1 Efficiency

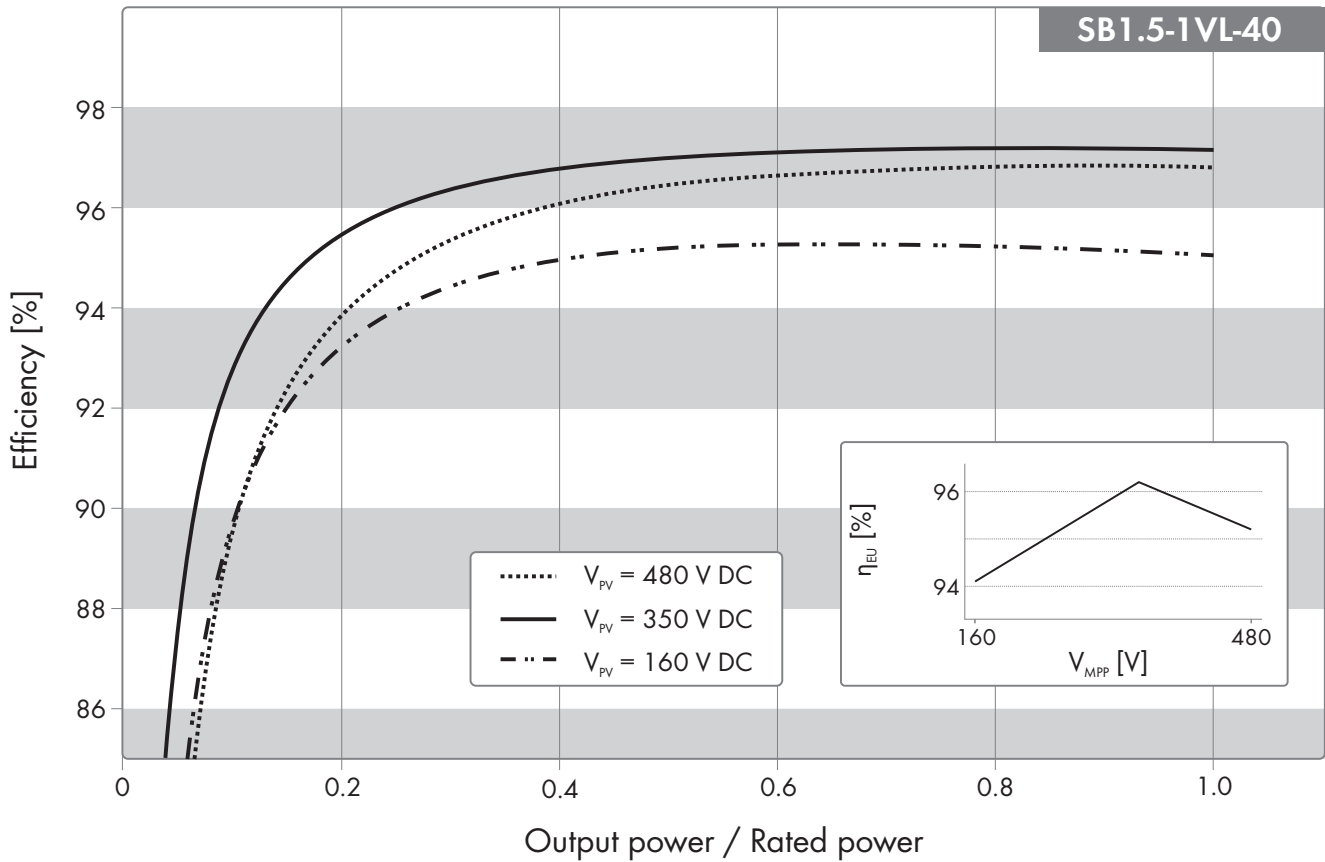


Maximum efficiency, η_{max} 97.2%

European weighted efficiency, η_{EU} 96.2%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 160 V	Rated input voltage 350 V	Maximum MPP voltage 480 V
5%	83.2%	87.5%	81.6%
10%	89.6%	92.7%	89.4%
20%	93.3%	95.5%	93.9%
25%	94.0%	96.0%	94.8%
30%	94.4%	96.4%	95.4%
50%	95.2%	97.0%	96.4%
75%	95.3%	97.2%	96.8%
100%	95.1%	97.2%	96.8%

3.1.2 Derating Behavior

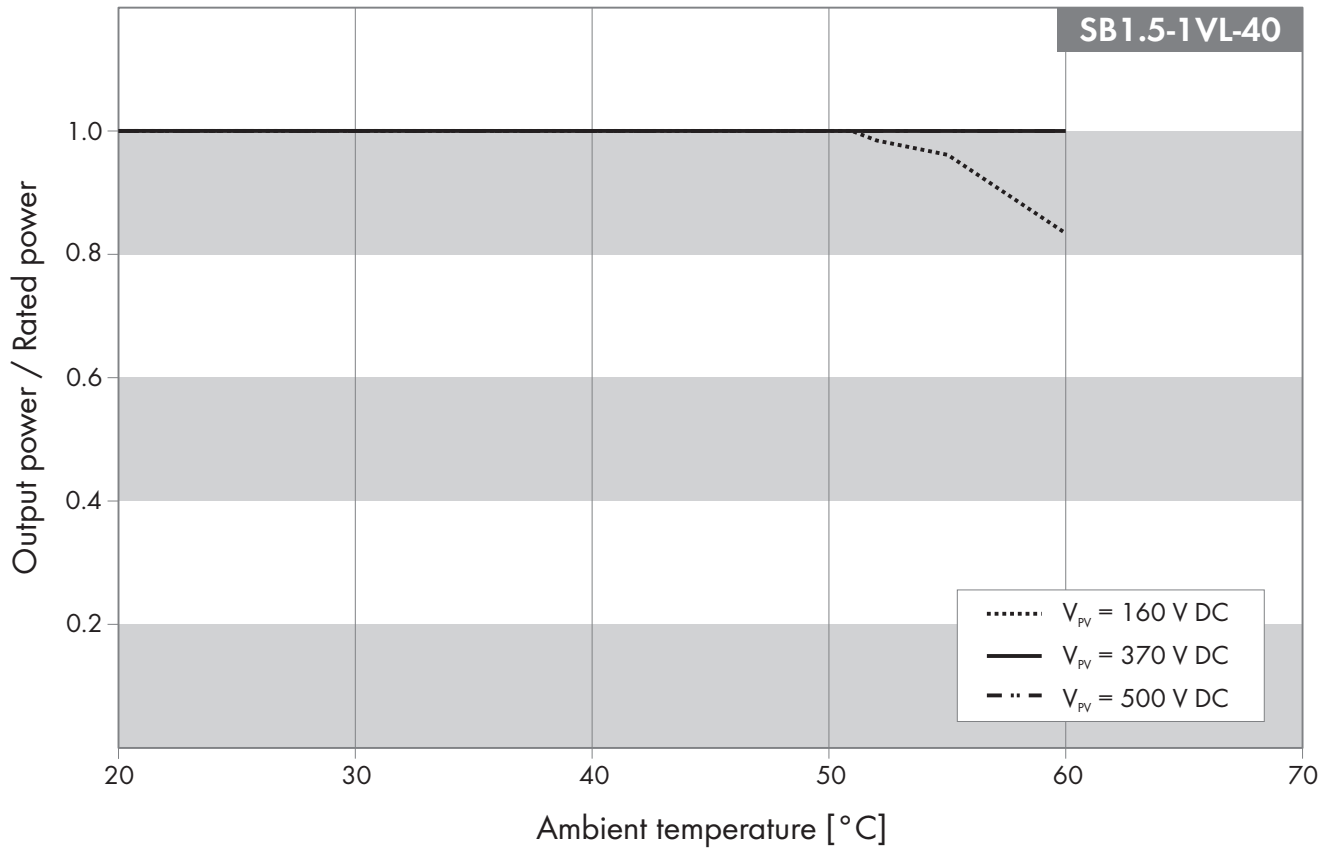

3.2 SB2.0-1VL-40

3.2.1 Efficiency

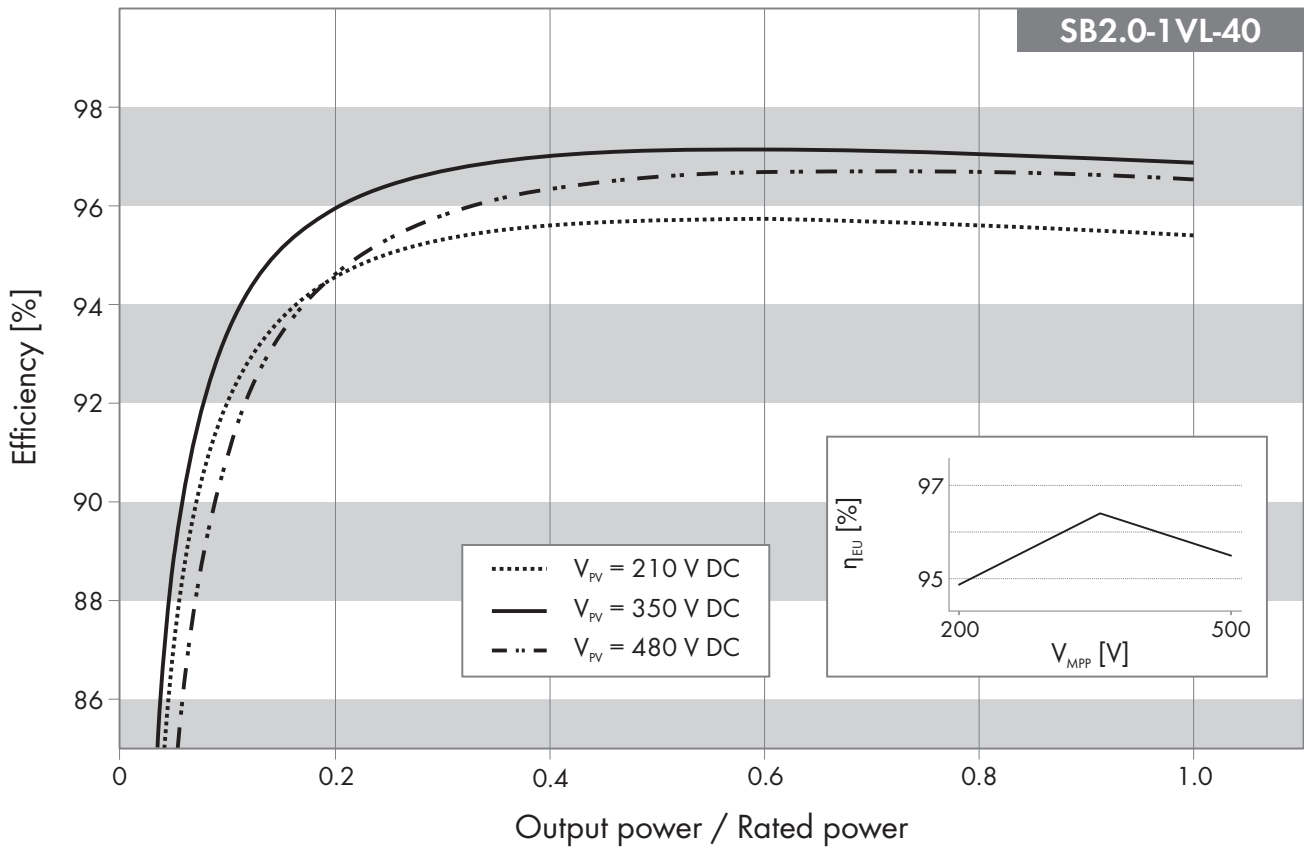


Maximum efficiency, η_{max} 97.1%

European weighted efficiency, η_{EU} 96.4%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 350 V	Maximum MPP voltage 480 V
5%	87.0%	88.6%	84.0%
10%	92.0%	93.4%	90.9%
20%	94.5%	95.9%	94.6%
25%	95.0%	96.4%	95.3%
30%	95.3%	96.7%	95.8%
50%	95.7%	97.1%	96.6%
75%	95.6%	97.1%	96.7%
100%	95.4%	96.9%	96.5%

3.2.2 Derating Behavior

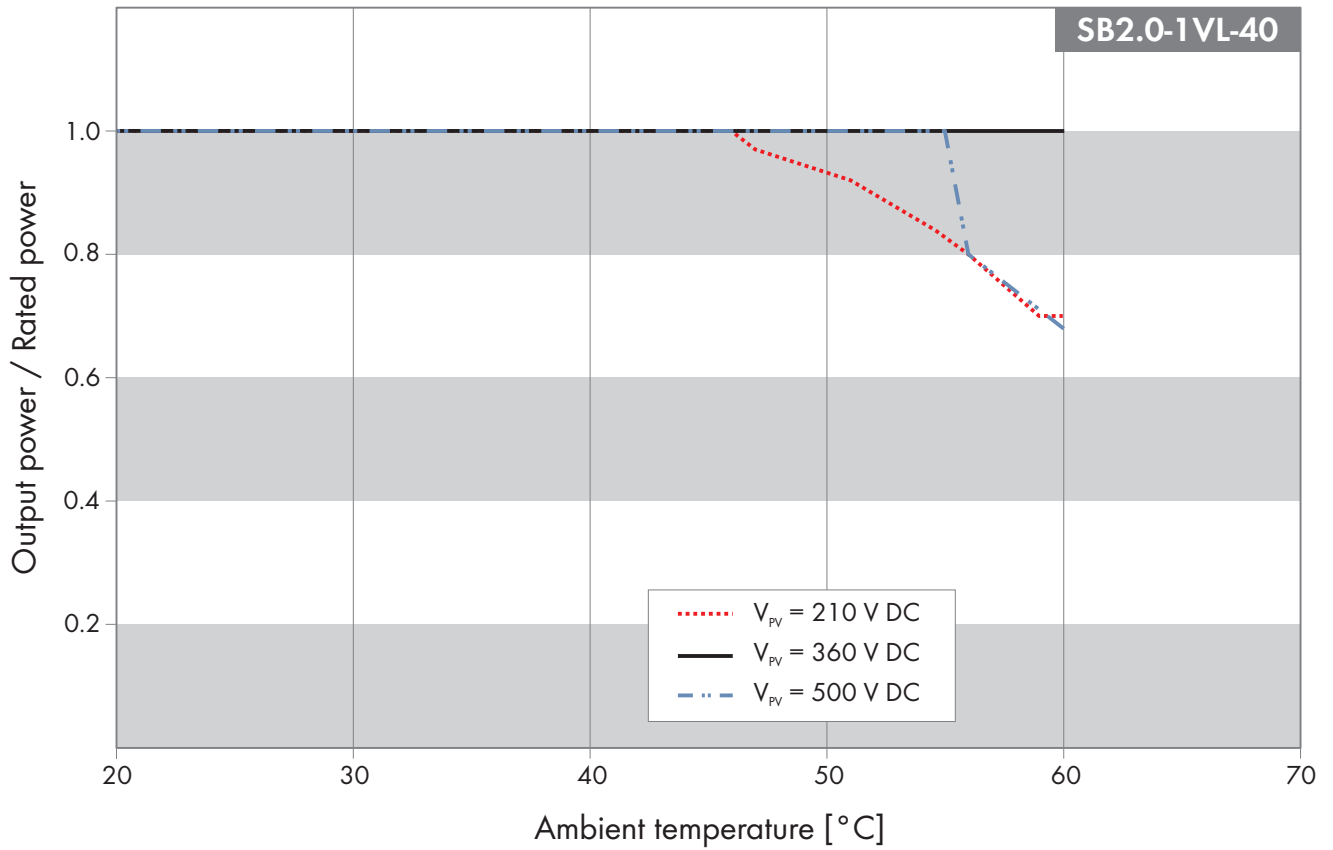

3.3 SB2.5-1VL-40

3.3.1 Efficiency

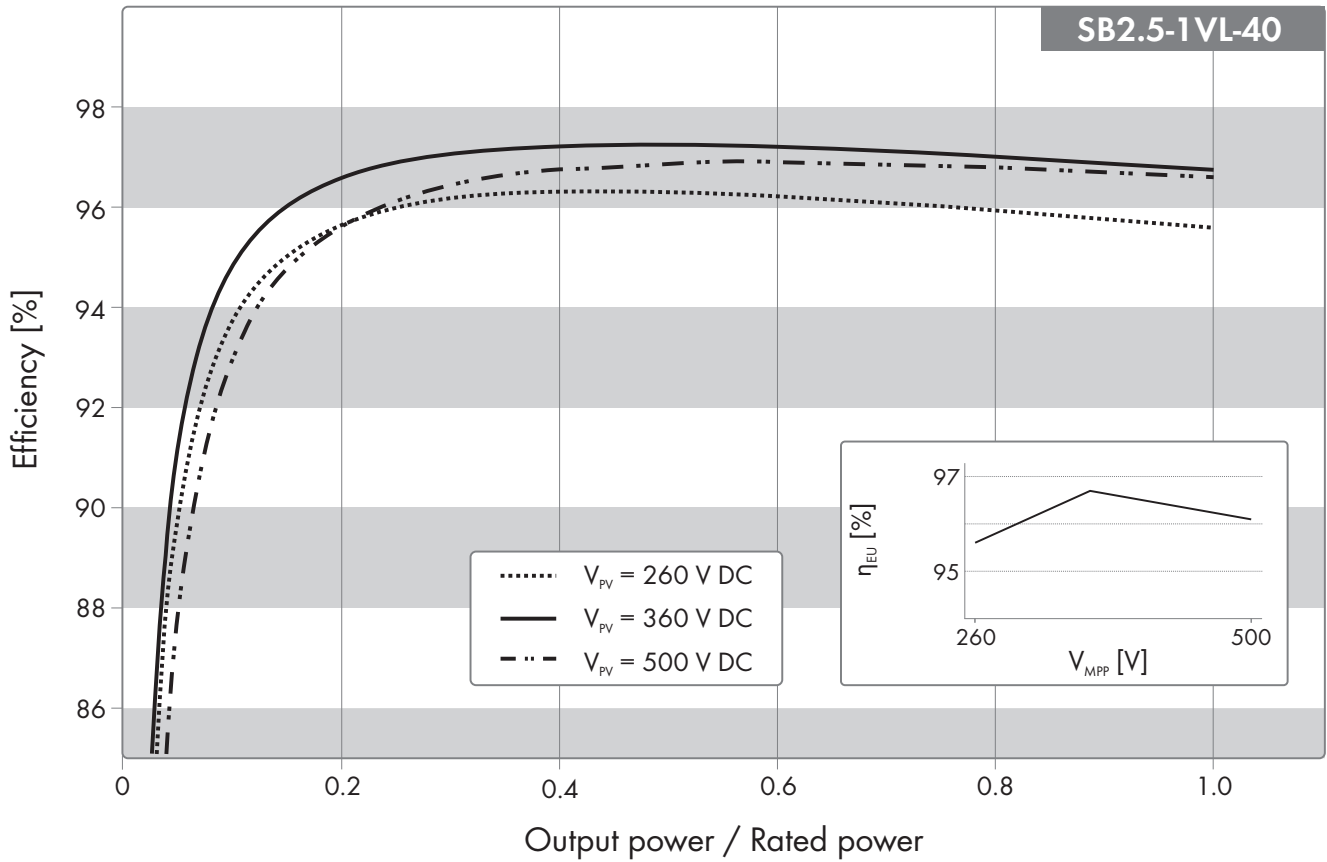


Maximum efficiency, η_{max} 97.2%

European weighted efficiency, η_{EU} 96.7%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 360 V	Maximum MPP voltage 500 V
5%	89.8%	91.2%	87.8%
10%	93.7%	94.8%	92.9%
20%	95.6%	96.6%	95.6%
25%	96.0%	96.9%	96.1%
30%	96.1%	97.0%	96.4%
50%	96.3%	97.2%	96.9%
75%	96.0%	97.0%	96.8%
100%	95.6%	96.7%	96.6%

3.3.2 Derating Behavior

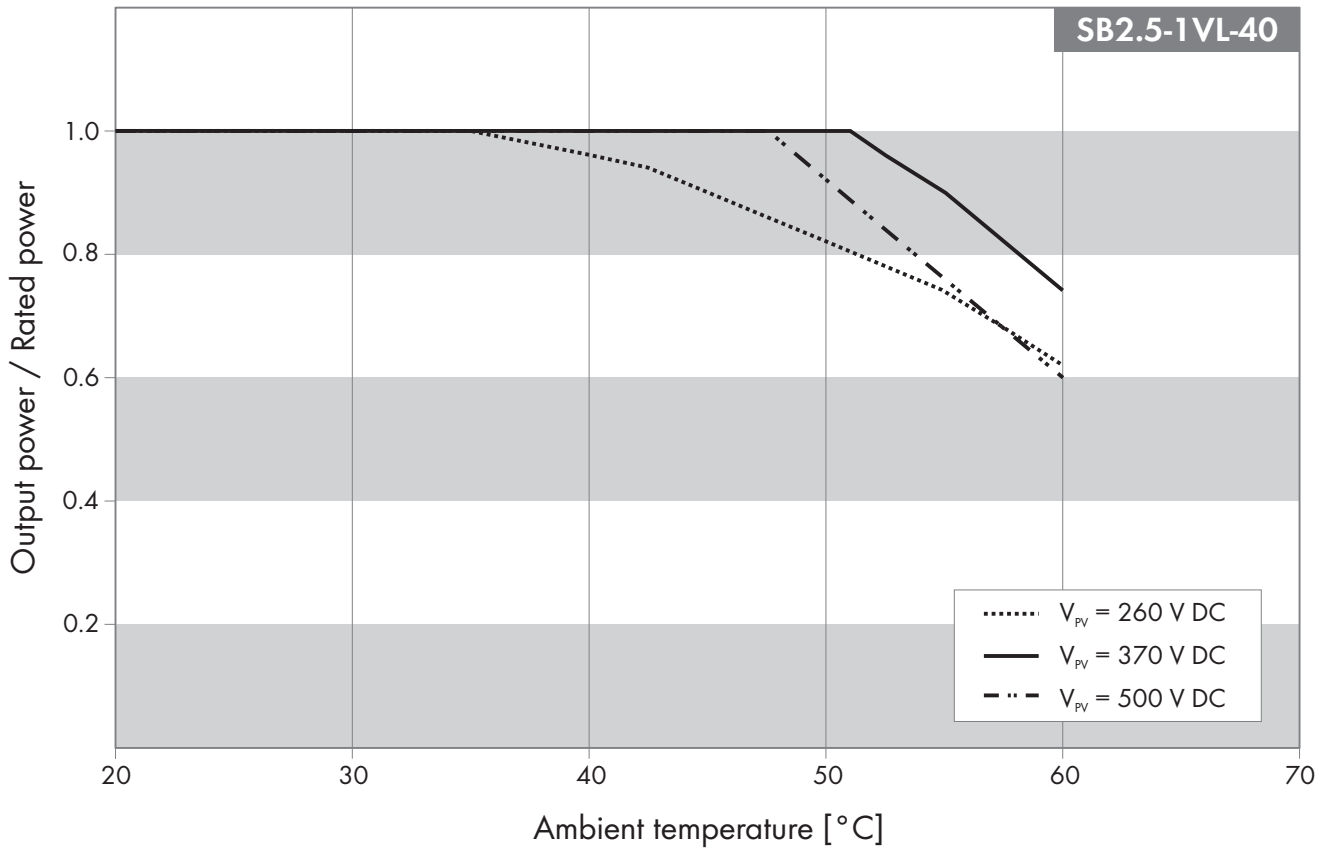

3.4 SB3.0-1AV-41

3.4.1 Efficiency

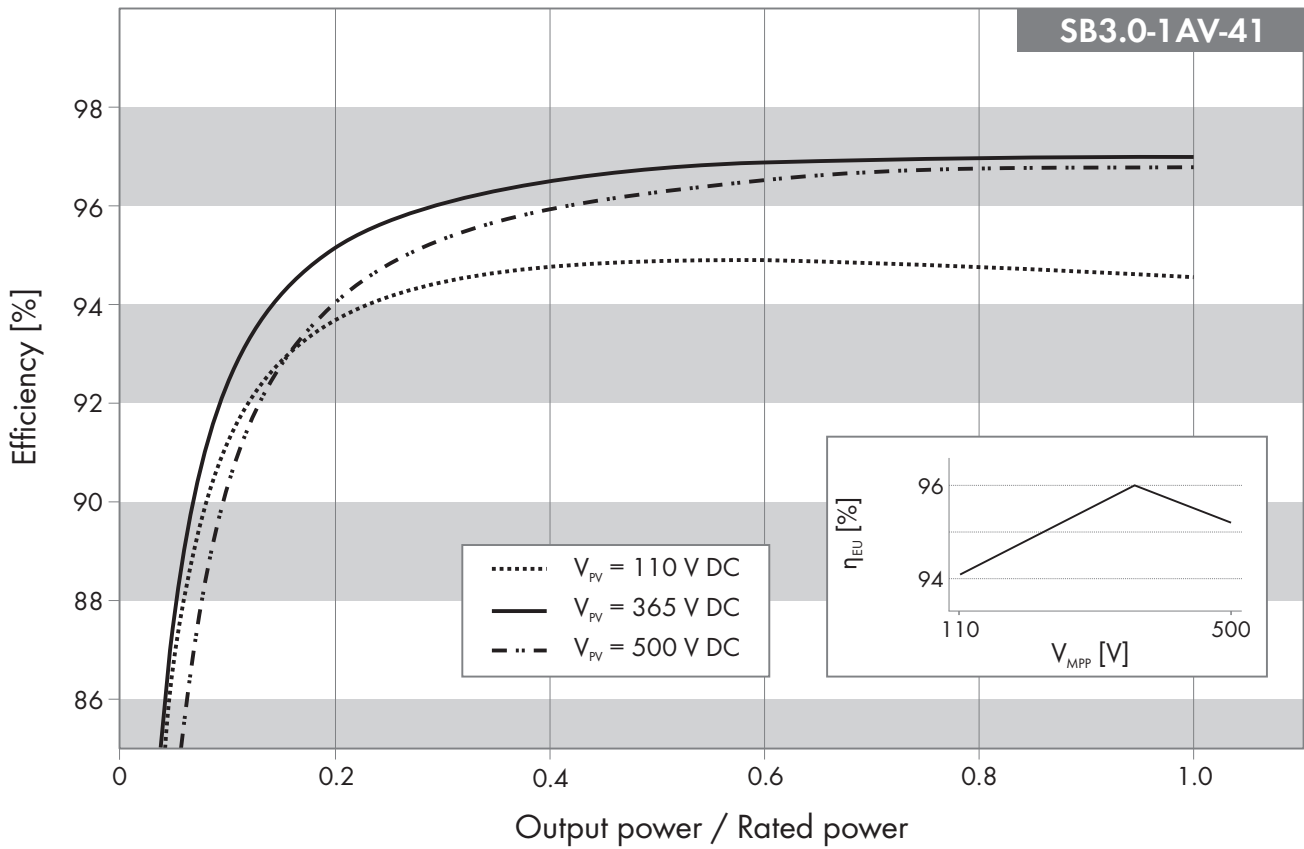


Maximum efficiency, η_{max} 97.1 %

European weighted efficiency, η_{EU} 96.3 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 110 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5 %	86.8 %	89.1 %	84.6 %
10 %	91.4 %	93.3 %	91.0 %
20 %	93.8 %	95.7 %	94.6 %
25 %	94.3 %	96.1 %	95.3 %
30 %	94.6 %	96.4 %	95.7 %
50 %	95.0 %	97.0 %	96.6 %
75 %	95.0 %	97.1 %	97.0 %
100 %	94.7 %	97.1 %	97.0 %

3.4.2 Derating Behavior

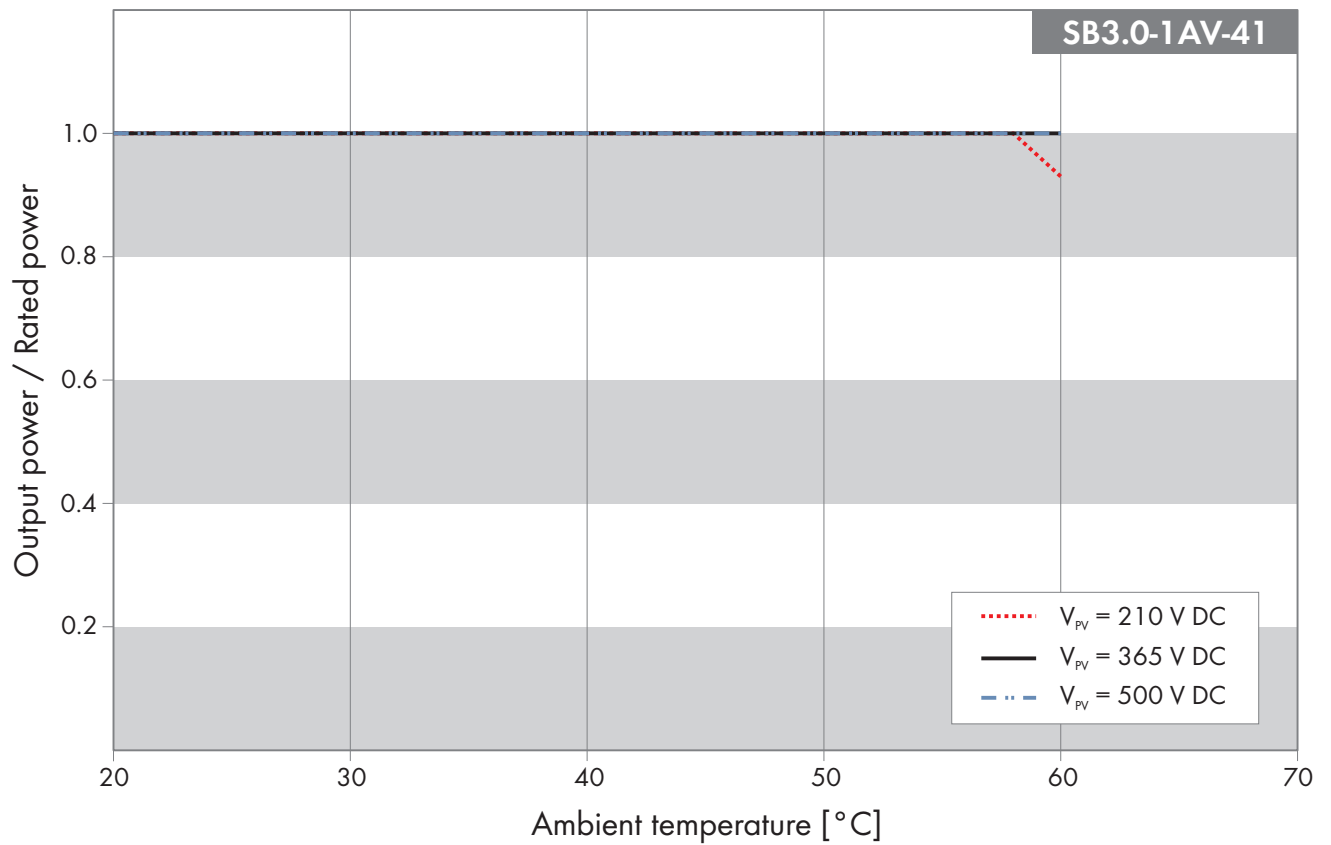

3.5 SB3.6-1AV-41

3.5.1 Efficiency

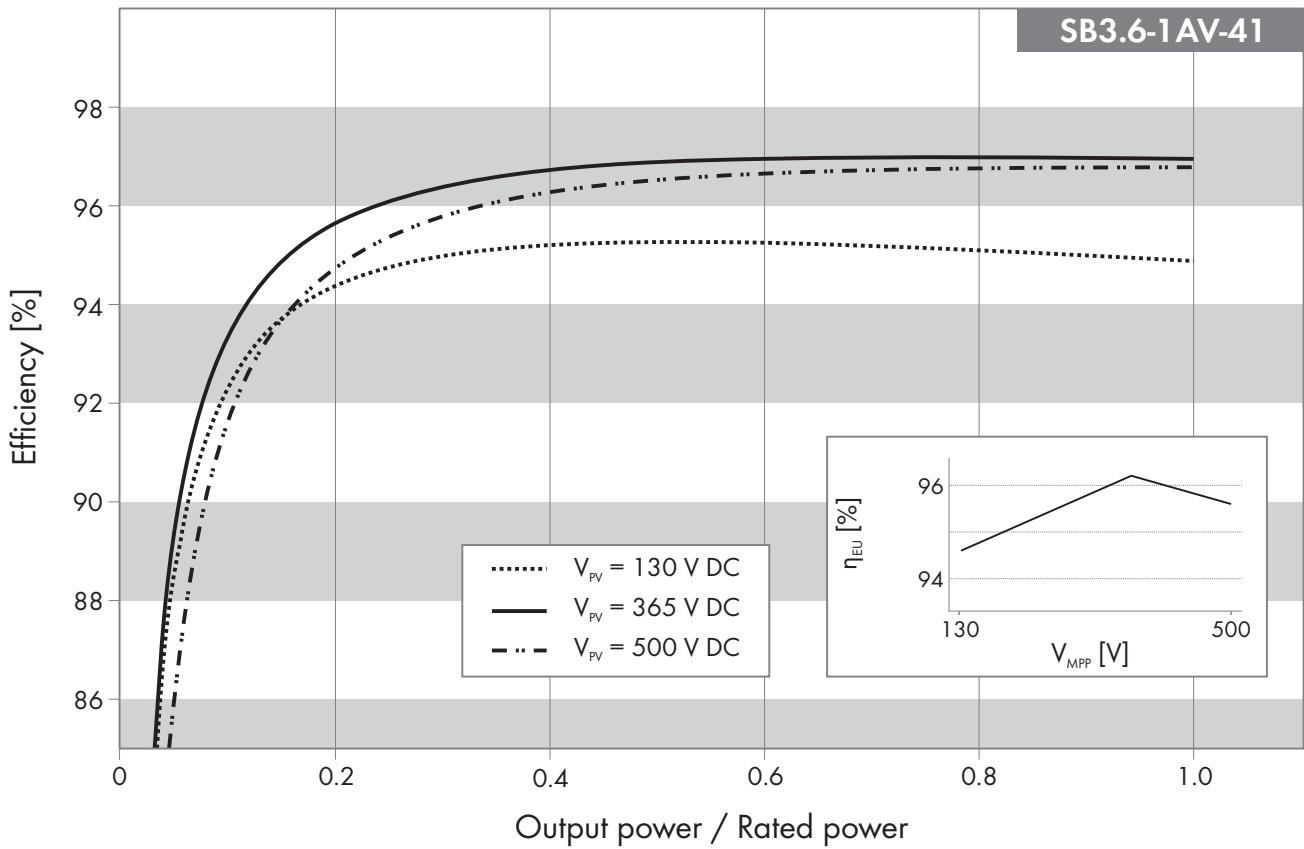


Maximum efficiency, η_{max} 97.1 %

European weighted efficiency, η_{EU} 96.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 130 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5 %	88.7 %	90.5 %	86.9 %
10 %	92.5 %	94.2 %	92.3 %
20 %	94.5 %	96.1 %	95.2 %
25 %	94.9 %	96.5 %	95.8 %
30 %	95.1 %	96.7 %	96.2 %
50 %	95.4 %	97.1 %	96.8 %
75 %	95.3 %	97.1 %	97.0 %
100 %	95.1 %	97.0 %	97.0 %

3.5.2 Derating Behavior

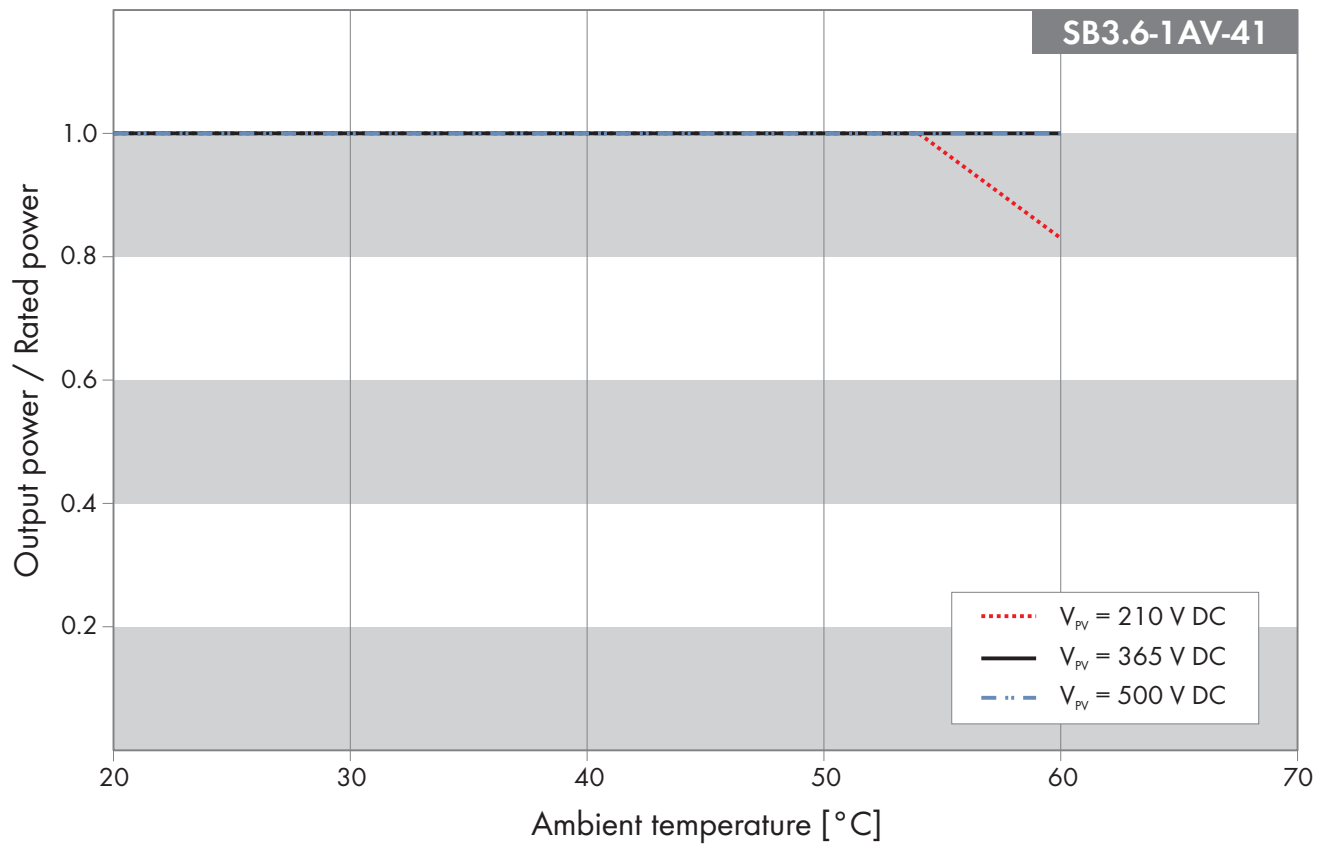

3.6 SB4.0-1AV-41

3.6.1 Efficiency

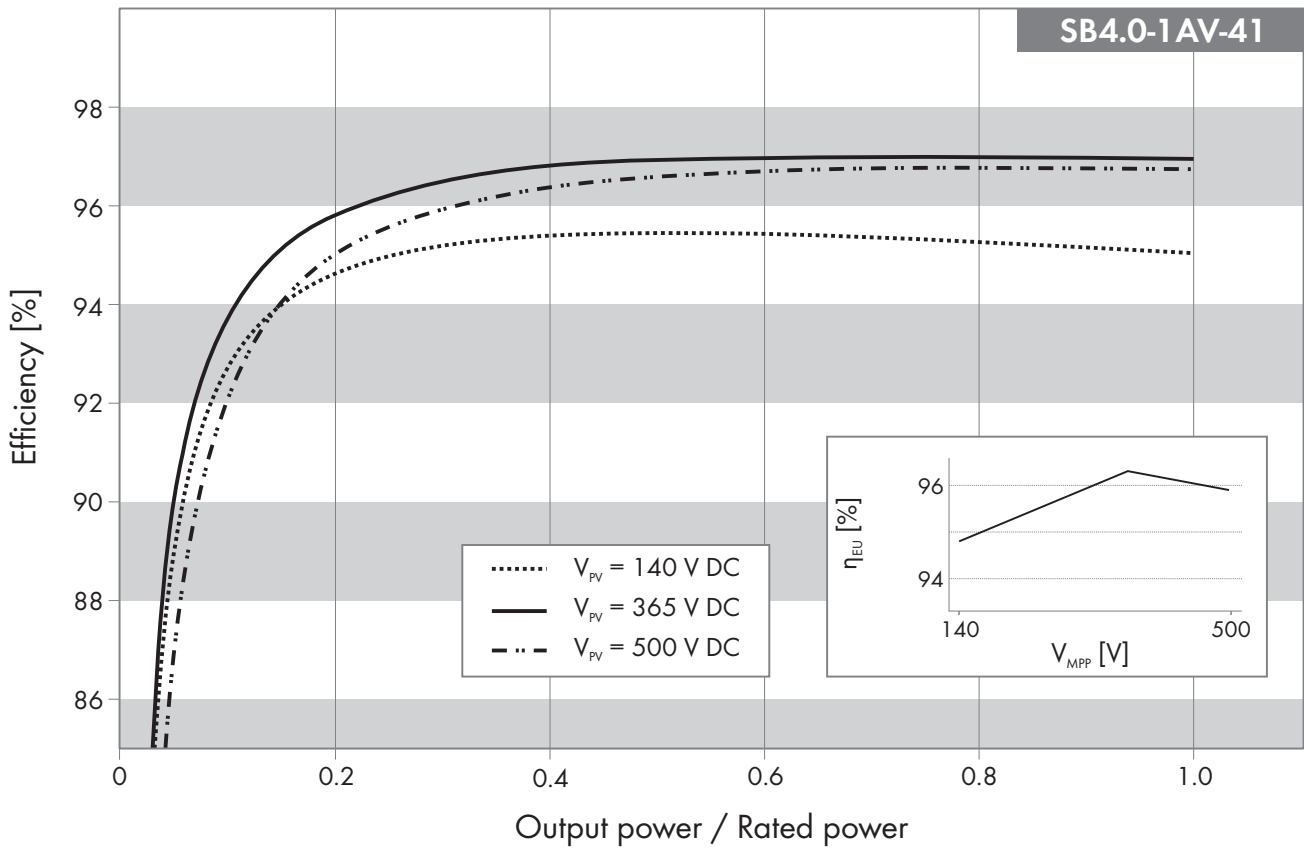


Maximum efficiency, η_{max} 97.1 %

European weighted efficiency, η_{EU} 96.6 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 140 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5 %	89.2 %	91.0 %	87.7 %
10 %	92.8 %	94.5 %	92.8 %
20 %	94.6 %	96.3 %	95.5 %
25 %	95.0 %	96.6 %	96.0 %
30 %	95.2 %	96.8 %	96.3 %
50 %	95.4 %	97.1 %	96.9 %
75 %	95.2 %	97.1 %	97.0 %
100 %	95.0 %	97.0 %	97.0 %

3.6.2 Derating Behavior

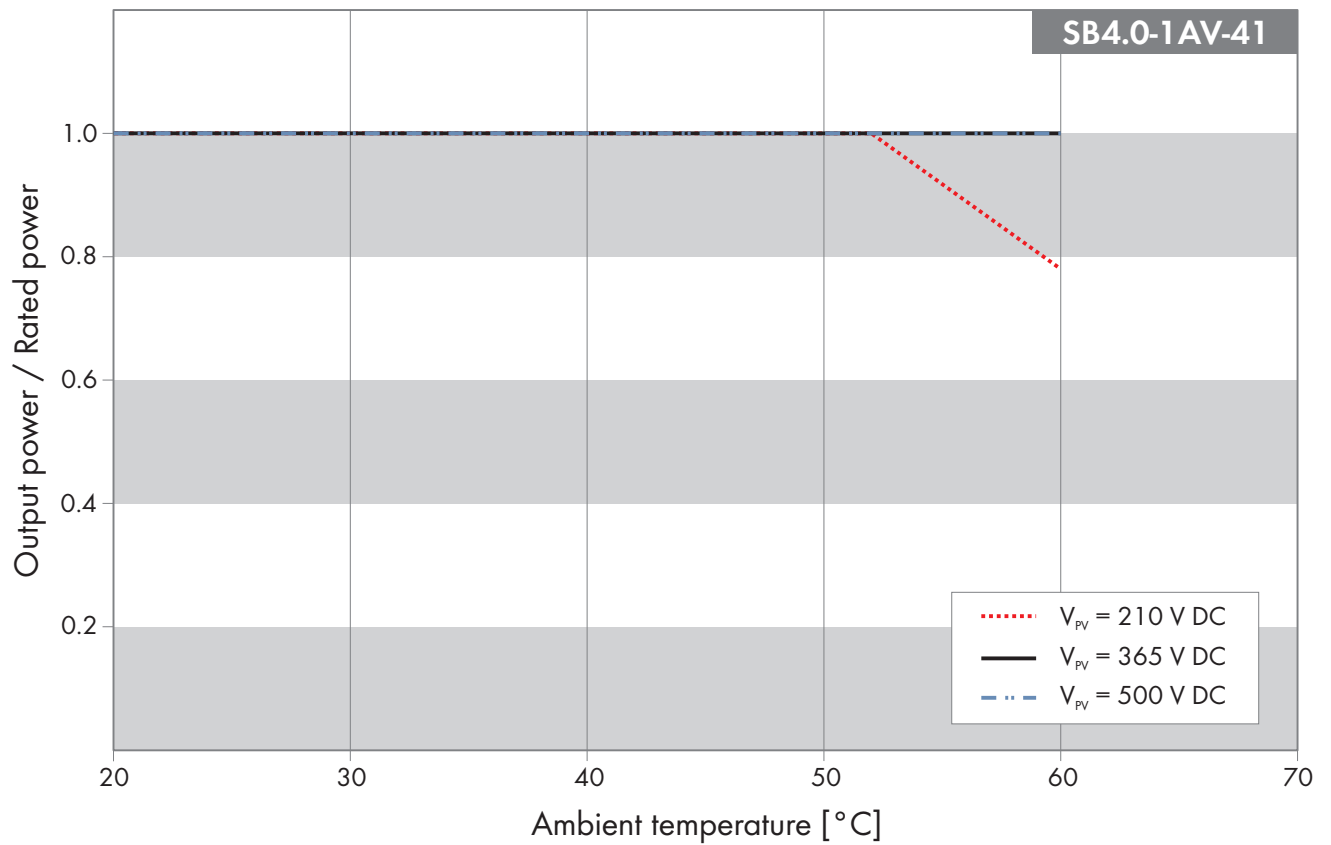

3.7 SB5.0-1AV-41

3.7.1 Efficiency

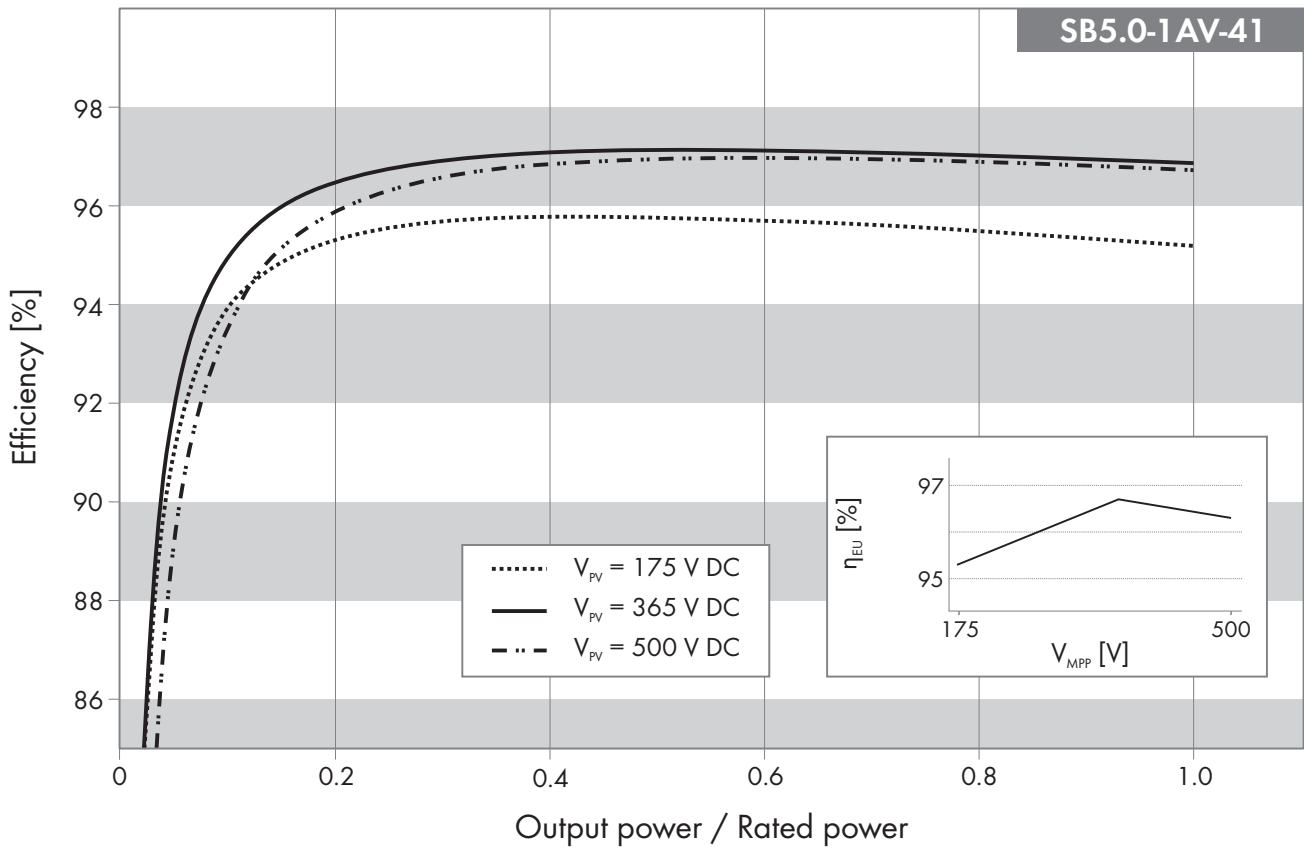


Maximum efficiency, η_{max} 97.1 %

European weighted efficiency, η_{EU} 96.7 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5 %	90.9 %	92.4 %	89.7 %
10 %	93.9 %	95.2 %	93.8 %
20 %	95.4 %	96.6 %	96.0 %
25 %	95.6 %	96.8 %	96.4 %
30 %	95.8 %	97.0 %	96.6 %
50 %	95.9 %	97.1 %	97.0 %
75 %	95.7 %	97.0 %	97.0 %
100 %	95.4 %	96.8 %	96.8 %

3.7.2 Derating Behavior

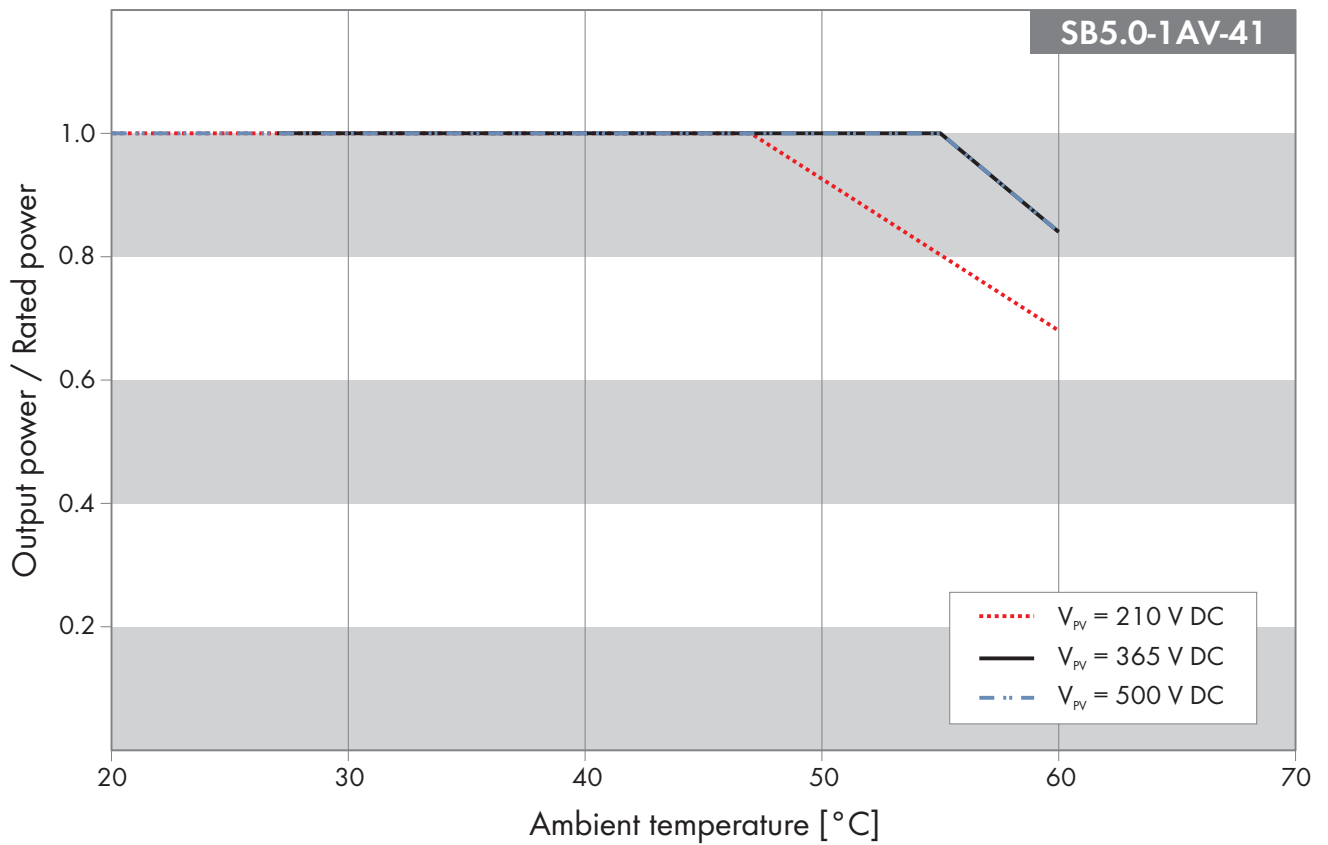

3.8 SB6.0-1AV-41

3.8.1 Efficiency

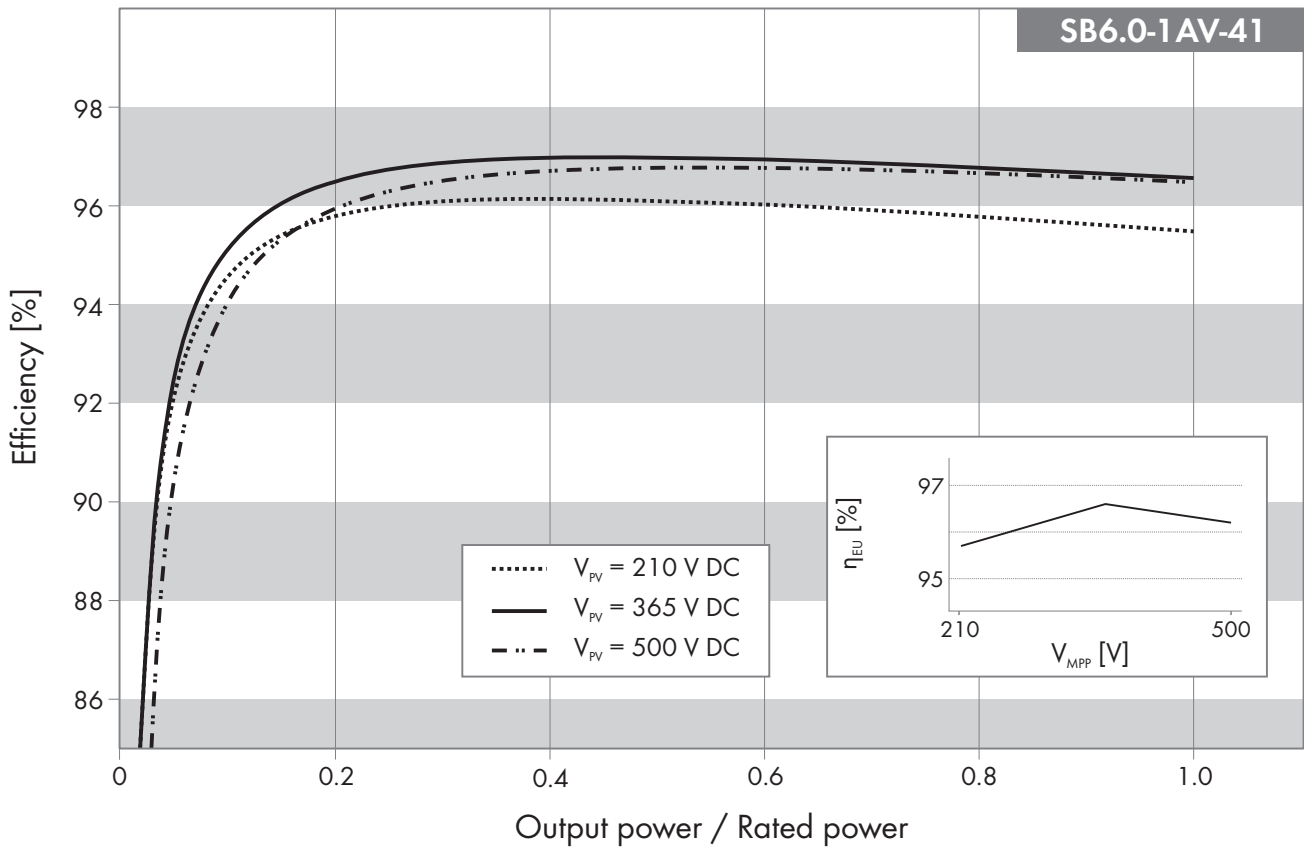


Maximum efficiency, η_{max} 97.1 %

European weighted efficiency, η_{EU} 96.8 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 365 V	Maximum MPP voltage 500 V
5 %	92.2 %	93.3 %	91.0 %
10 %	94.7 %	95.7 %	94.6 %
20 %	95.9 %	96.8 %	96.3 %
25 %	96.1 %	97.0 %	96.6 %
30 %	96.2 %	97.1 %	96.8 %
50 %	96.3 %	97.1 %	97.0 %
75 %	96.0 %	96.9 %	96.9 %
100 %	95.7 %	96.6 %	96.7 %


3.8.2 Derating Behavior

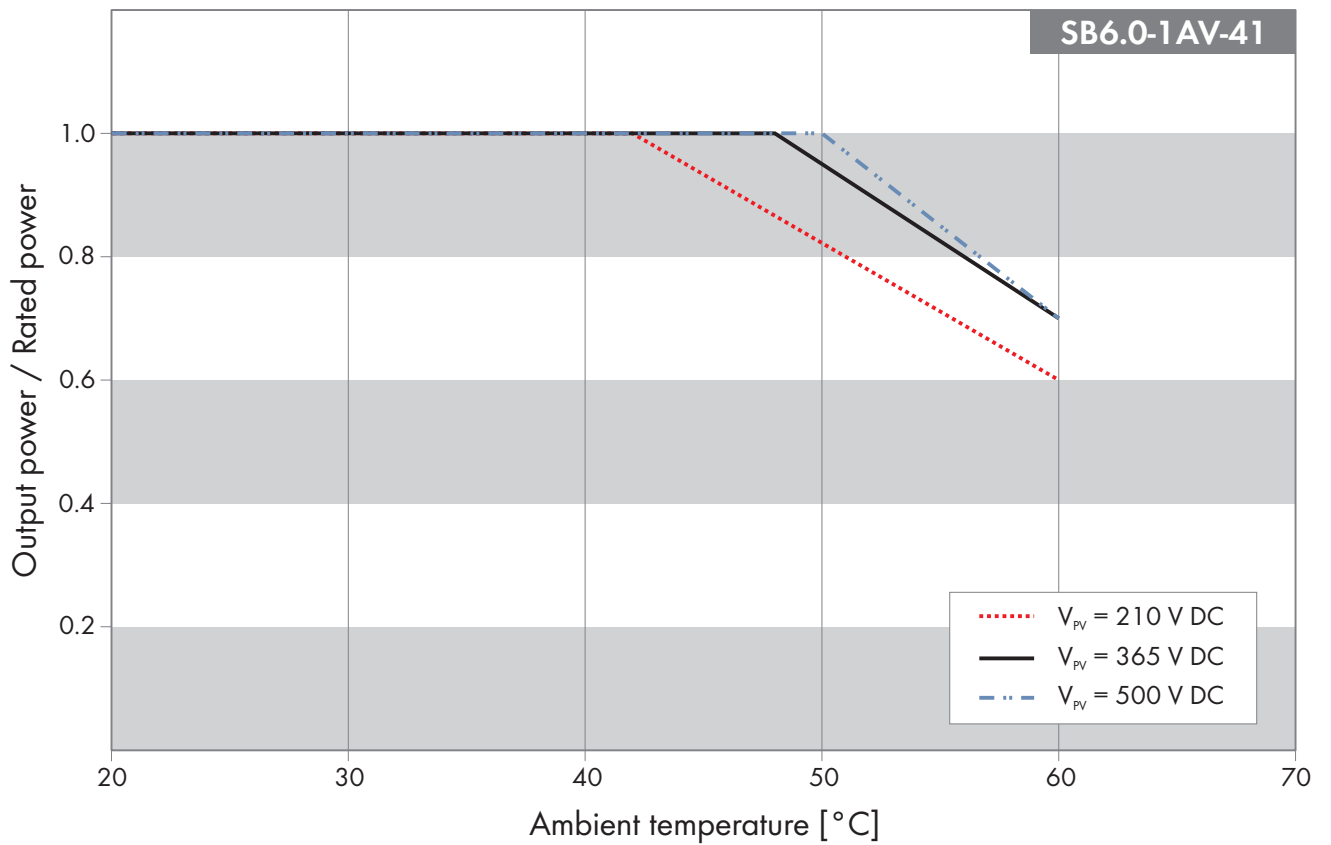

4 Sunny Boy Storage

4.1 SBS2.5-1VL-10

4.1.1 DC Efficiency

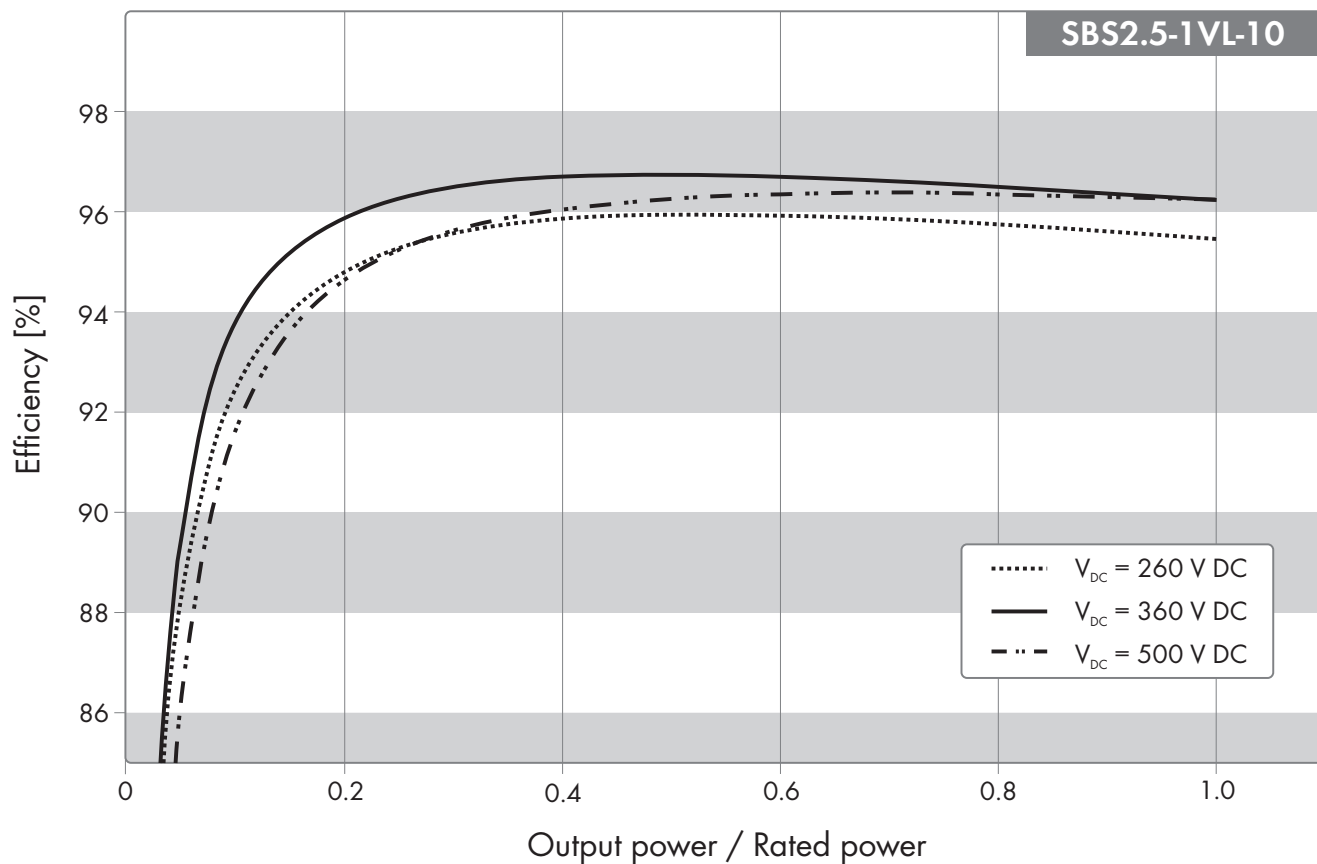


Maximum efficiency, η_{max} 96.7%

European weighted efficiency, η_{EU} 96.1%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum DC voltage 260 V	Rated input voltage 360 V	Maximum DC voltage 500 V
5%	87.9%	89.2%	85.7%
10%	92.3%	93.6%	91.5%
20%	94.8%	95.8%	94.6%
25%	95.3%	96.2%	95.2%
30%	95.5%	96.5%	95.6%
50%	95.9%	96.7%	96.2%
75%	95.8%	96.5%	96.3%
100%	95.4%	96.2%	96.2%

4.1.2 Derating Behavior

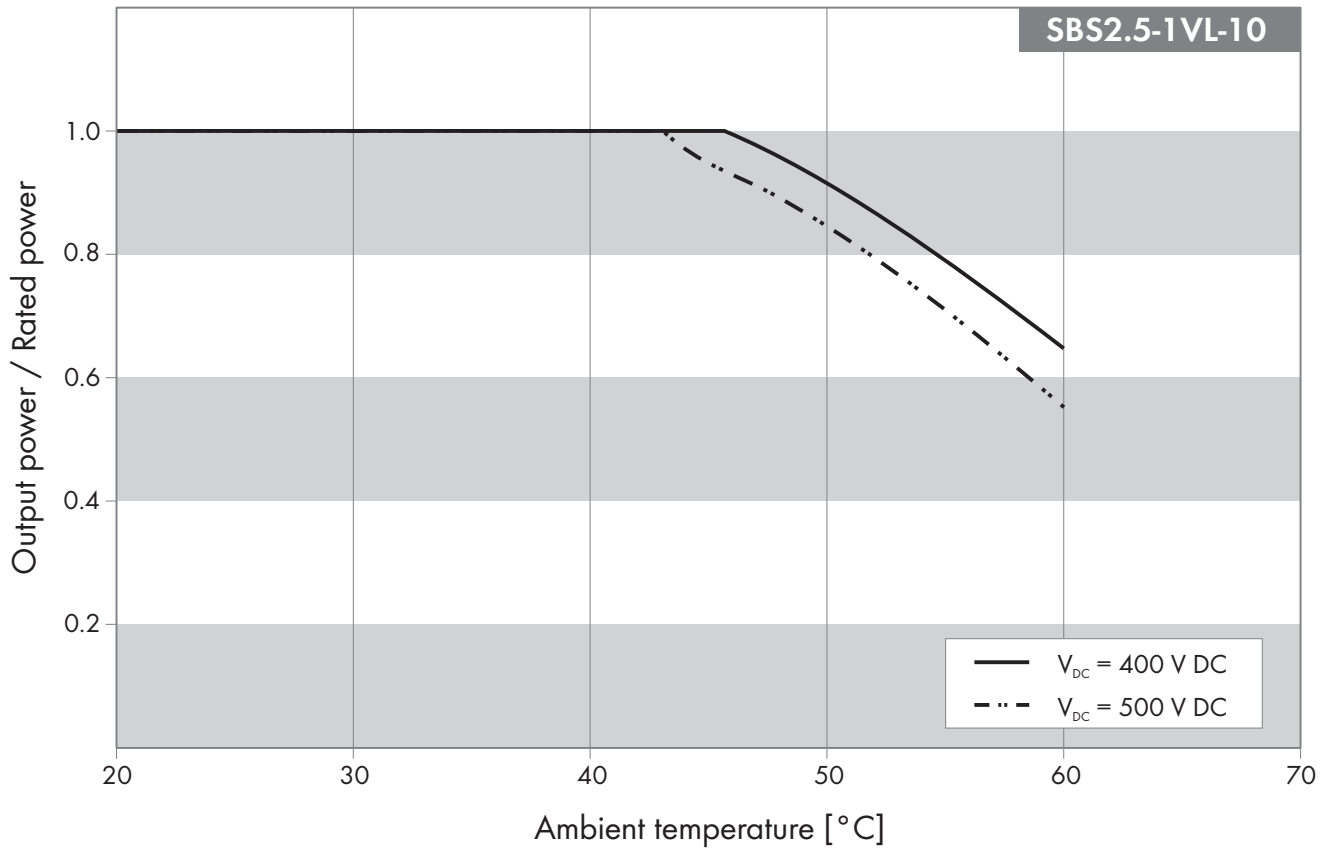

4.2 SBS3.7-10

4.2.1 DC Efficiency

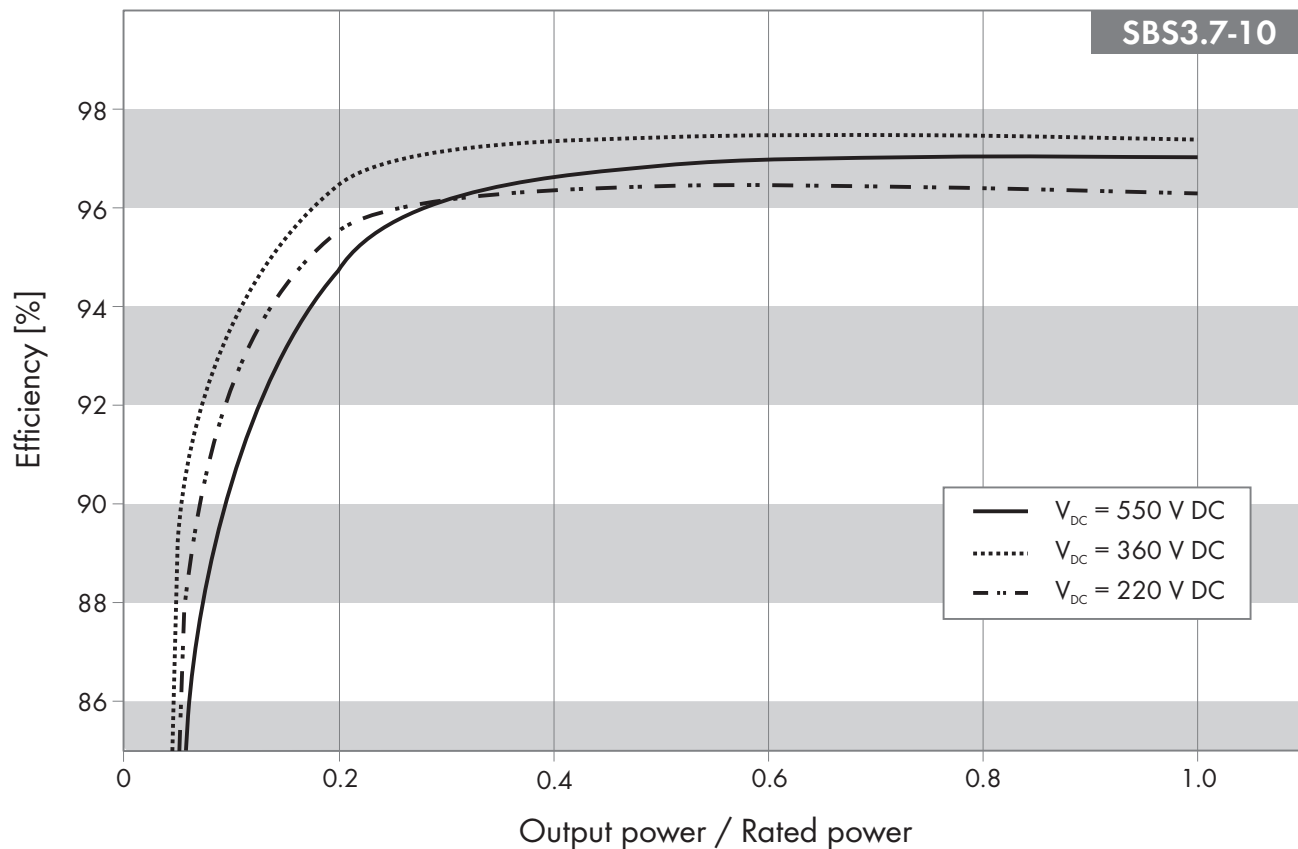


Maximum efficiency

97.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum DC voltage 220 V	Rated input voltage 360 V	Maximum DC voltage 550 V
10 %	92.7 %	93.6 %	88.6 %
20 %	95.5 %	96.5 %	94.7 %
30 %	96.1 %	97.1 %	96.1 %
50 %	96.4 %	97.4 %	96.8 %
75 %	96.4 %	97.5 %	97.0 %
100 %	96.3 %	97.4 %	97.0 %

4.2.2 Derating Behavior

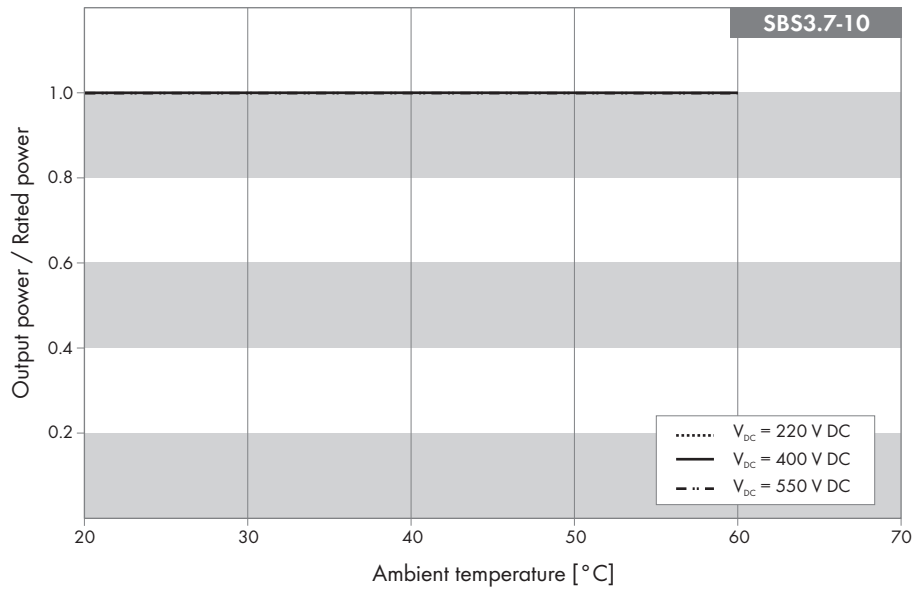

4.3 SBS5.0-10

4.3.1 DC Efficiency

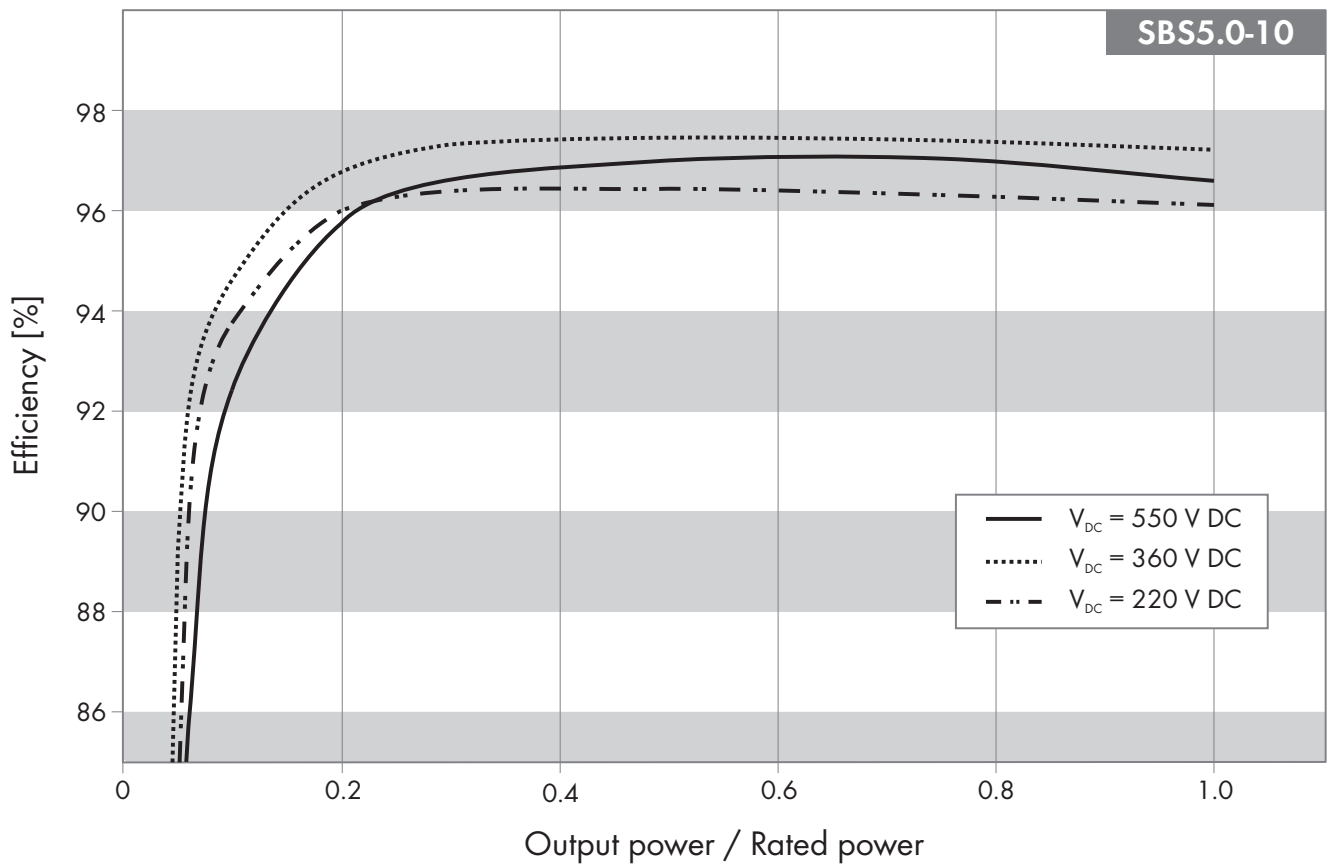


Maximum efficiency

97.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum DC voltage	Rated input voltage	Maximum DC voltage
	220 V	360 V	550 V
10 %	93.8 %	94.6 %	92.4 %
20 %	96.0 %	96.9 %	92.4 %
30 %	96.4 %	97.3 %	96.5 %
50 %	96.4 %	97.5 %	97.0 %
75 %	96.3 %	97.4 %	97.0 %
100 %	96.1 %	97.2 %	96.6 %

4.3.2 Derating Behavior

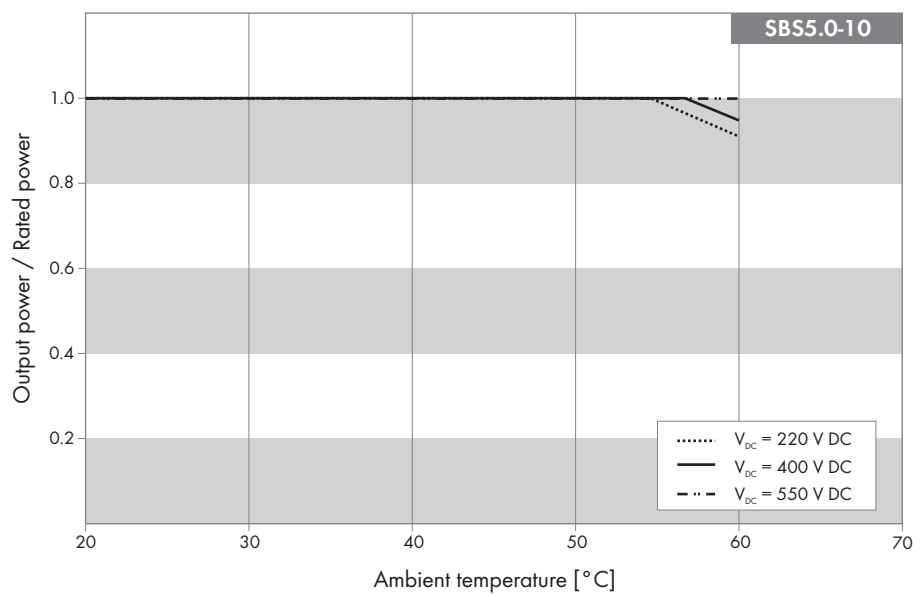

4.4 SBS6.0-10

4.4.1 DC Efficiency

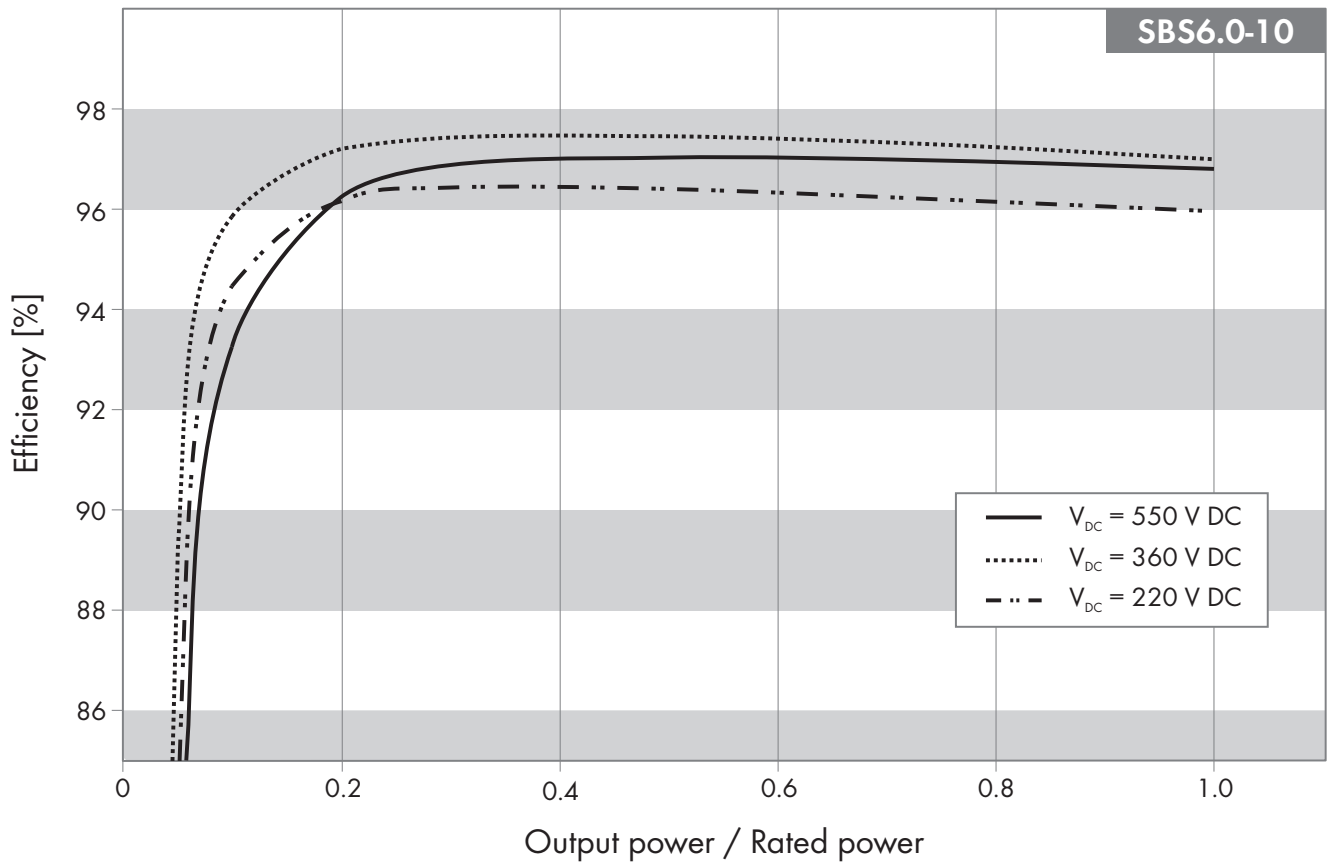


Maximum efficiency

97.5 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum DC voltage 220 V	Rated input voltage 360 V	Maximum DC voltage 550 V
10 %	94.5 %	95.8 %	93.3 %
20 %	96.2 %	97.2 %	96.2 %
30 %	96.4 %	97.4 %	96.8 %
50 %	96.4 %	97.5 %	97.0 %
75 %	96.2 %	97.3 %	97.0 %
100 %	96.0 %	97.0 %	96.8 %


4.4.2 Derating Behavior

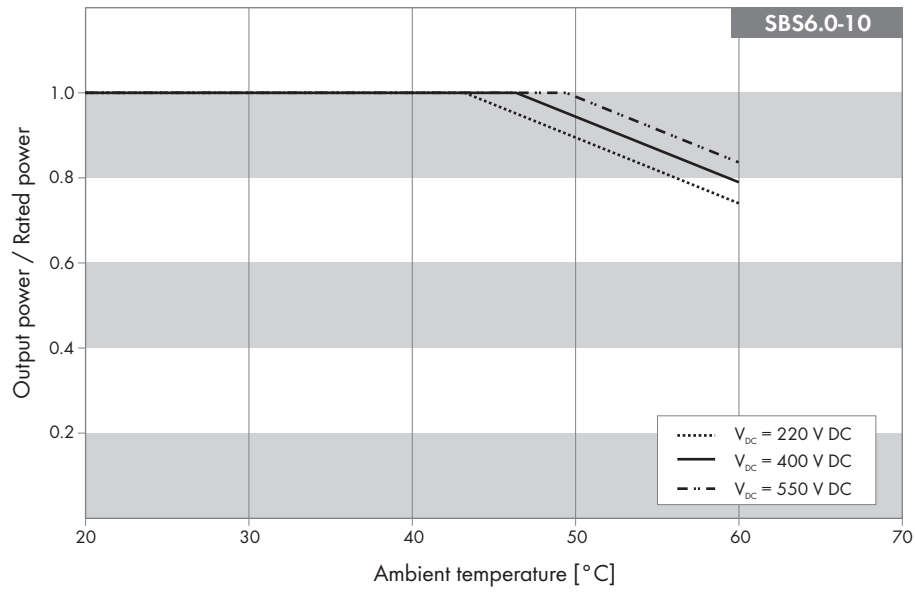

5 Sunny Boy Smart Energy

5.1 SBSE3.6-50

5.1.1 Efficiency

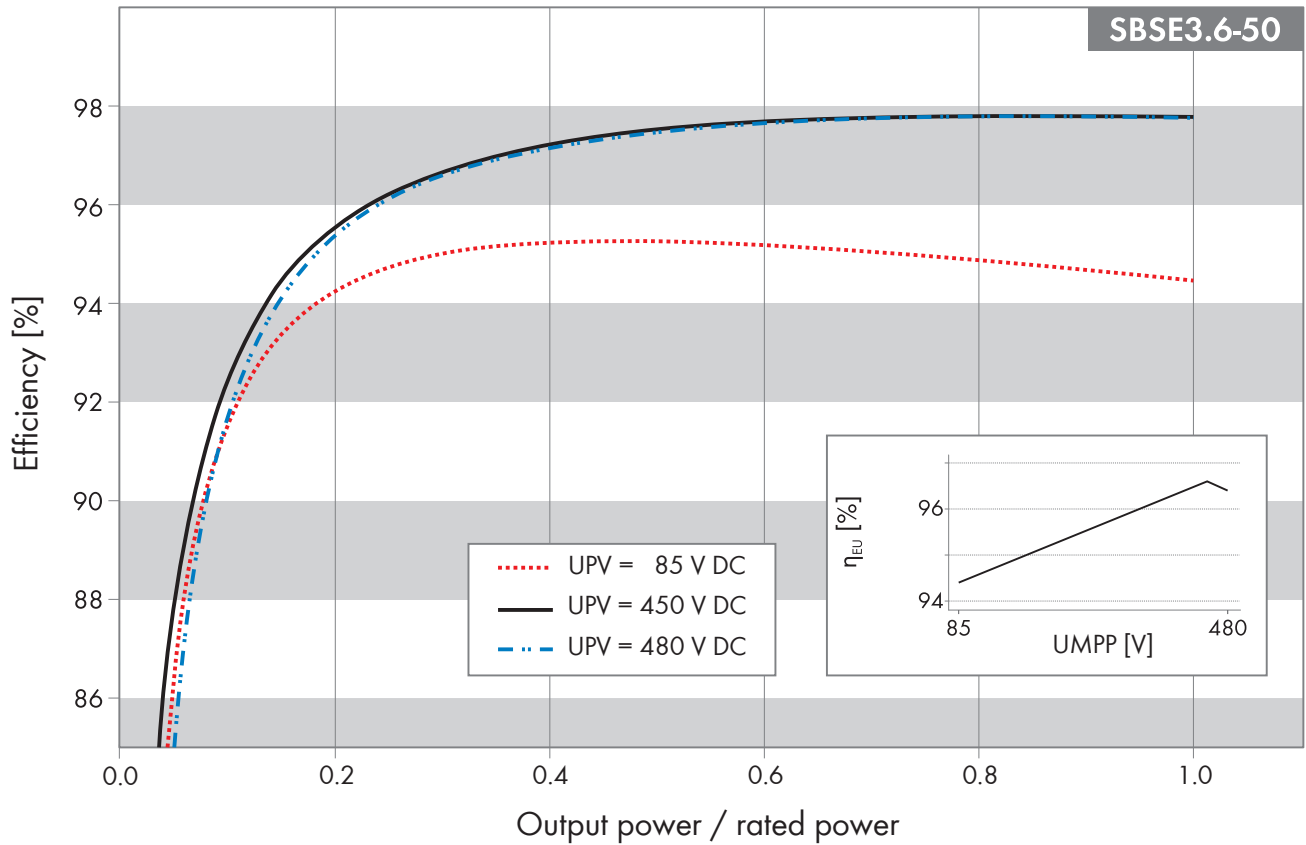


Maximum efficiency, η_{max} 97.8%

European weighted efficiency, η_{EU} 96.6%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 85 V	Rated input voltage 450 V	Maximum MPP voltage 480 V
5%	86.2%	87.7%	84.8%
10%	91.5%	92.4%	91.6%
20%	94.3%	95.5%	95.4%
25%	94.7%	96.2%	96.1%
30%	95.0%	96.7%	96.6%
50%	95.3%	97.5%	97.5%
75%	95.0%	97.8%	97.8%
100%	94.5%	97.8%	97.8%

5.1.2 Derating behavior

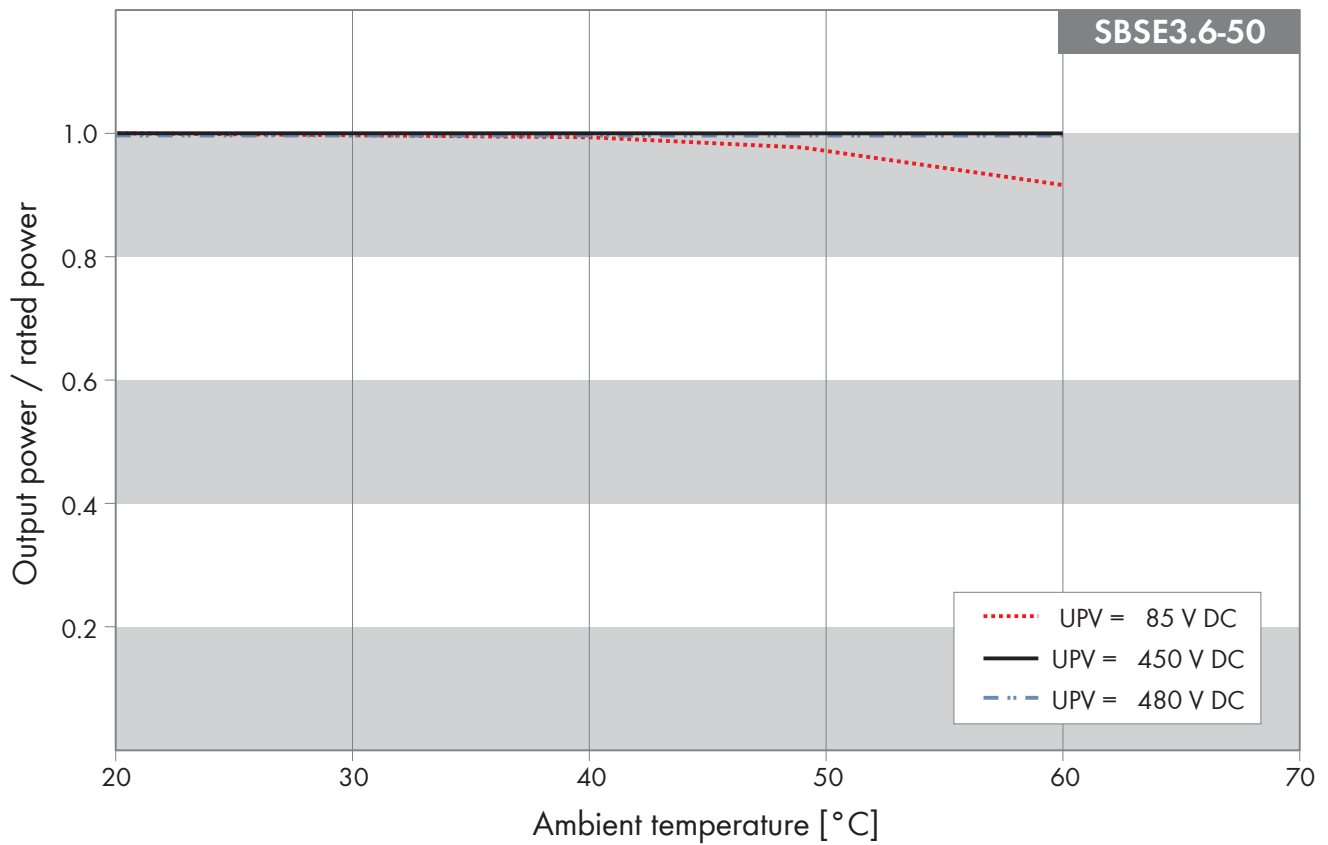

5.2 SBSE4.0-50

5.2.1 Efficiency

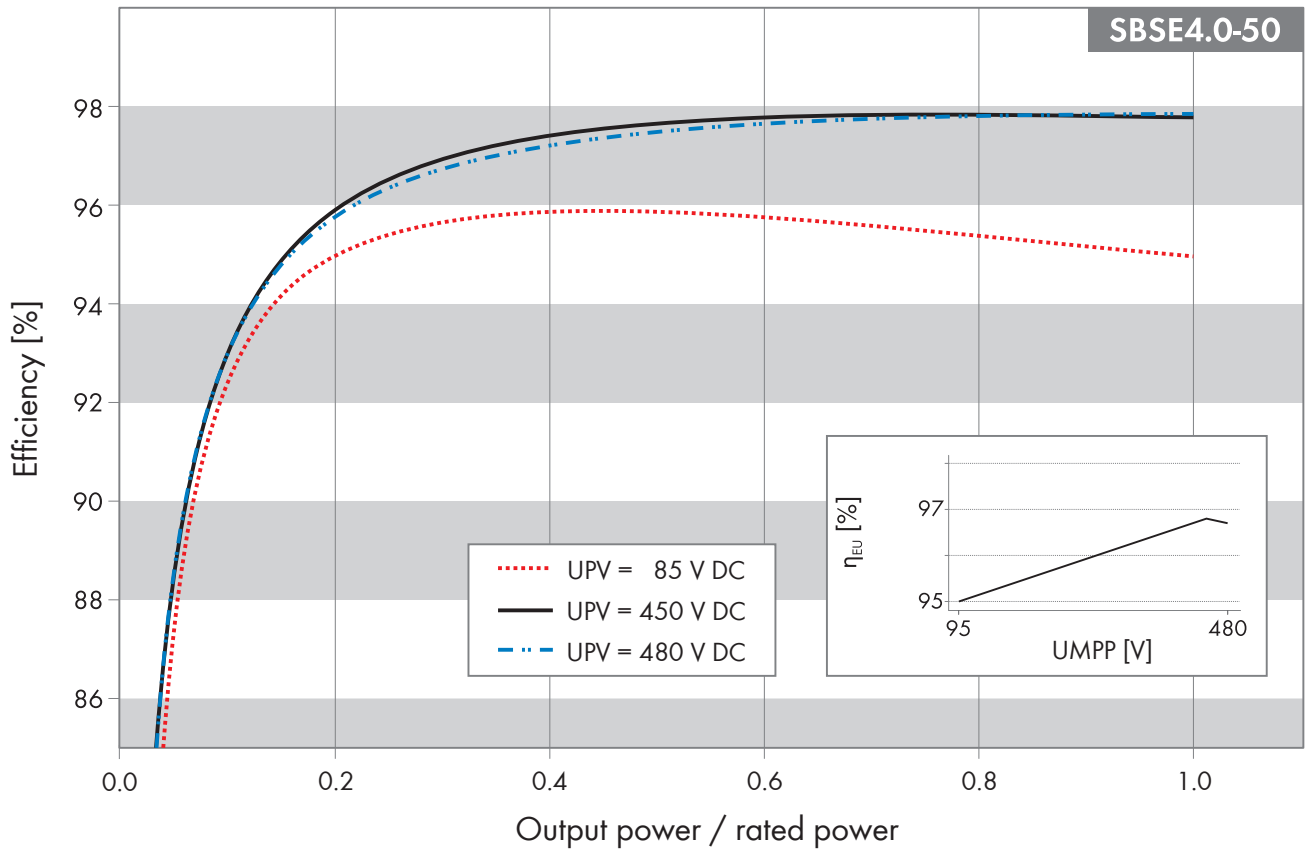


Maximum efficiency, η_{max} 97.8%

European weighted efficiency, η_{EU} 96.8%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 95 V	Rated input voltage 450 V	Maximum MPP voltage 480 V
5%	87.3%	88.4%	88.4%
10%	92.4%	93.0%	93.0%
20%	95.0%	95.9%	95.8%
25%	95.4%	96.5%	96.4%
30%	95.7%	97.0%	96.8%
50%	95.9%	97.7%	97.5%
75%	95.5%	97.9%	97.8%
100%	95.0%	97.8%	97.9%

5.2.2 Derating behavior

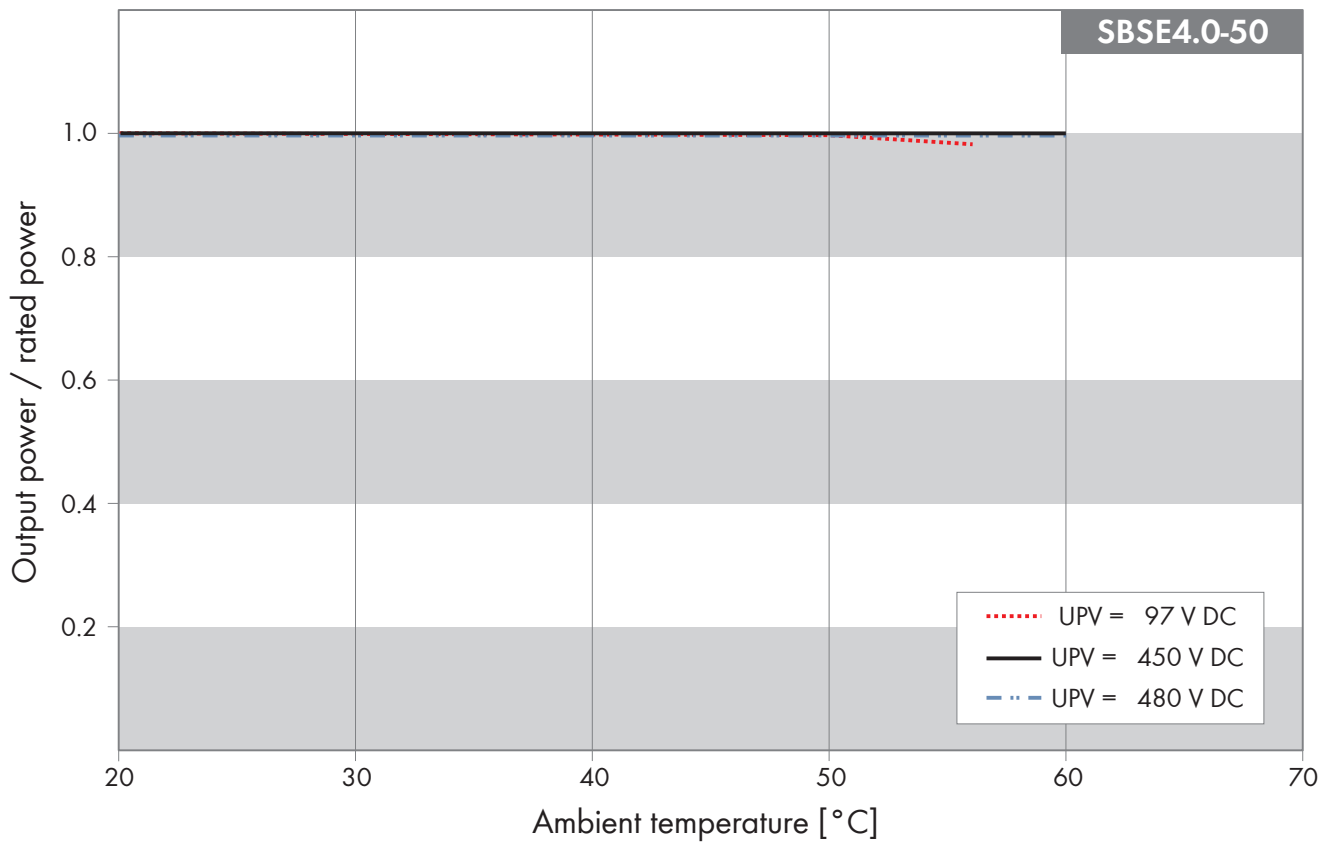

5.3 SBSE5.0-50

5.3.1 Efficiency

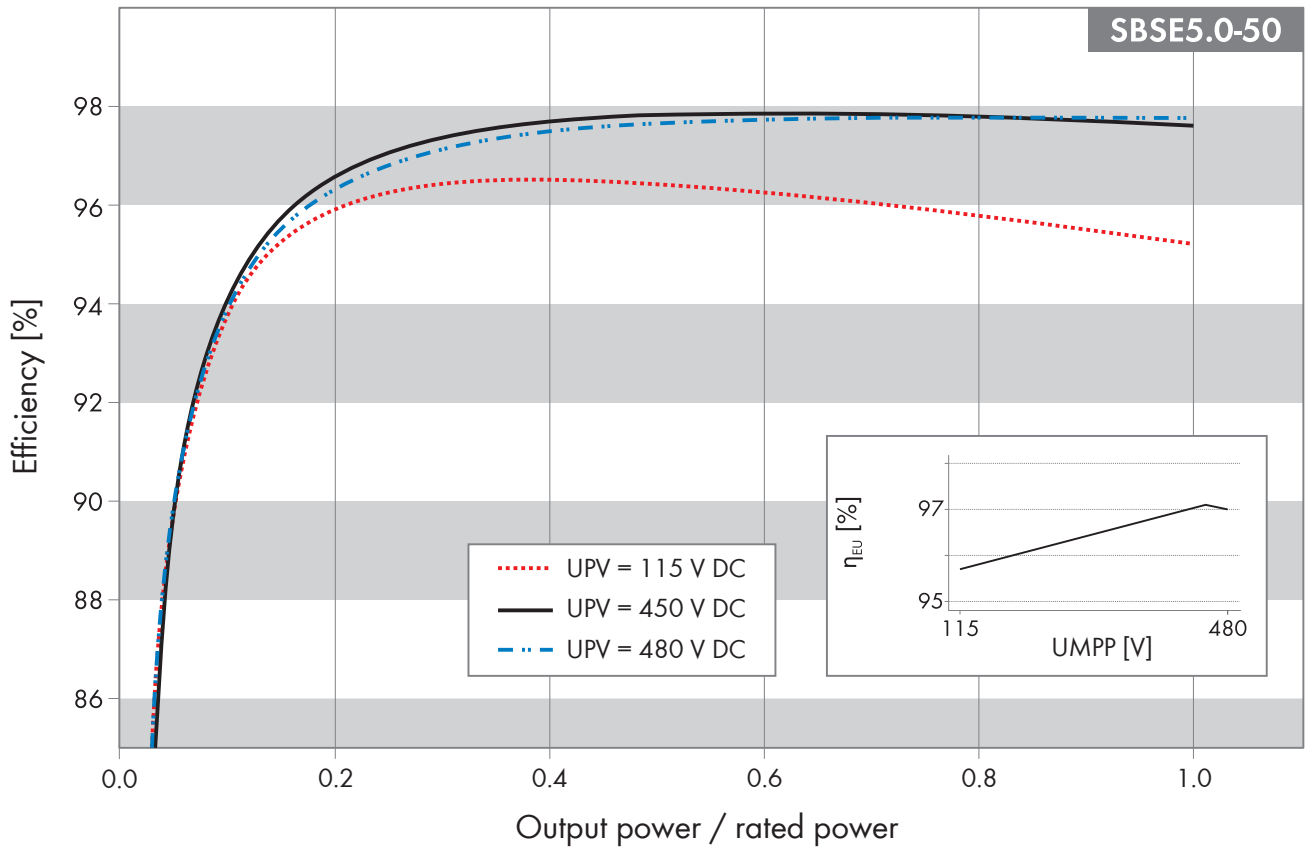


Maximum efficiency, η_{max} 97.8%

European weighted efficiency, η_{EU} 97.1%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 115 V	Rated input voltage 450 V	Maximum MPP voltage 480 V
5%	89.7%	89.5%	89.7%
10%	93.8%	94.0%	93.9%
20%	95.9%	96.6%	96.3%
25%	96.3%	97.1%	96.8%
30%	96.4%	97.4%	97.1%
50%	96.4%	97.9%	97.7%
75%	95.9%	97.9%	97.8%
100%	95.2%	97.6%	97.7%

5.3.2 Derating behavior

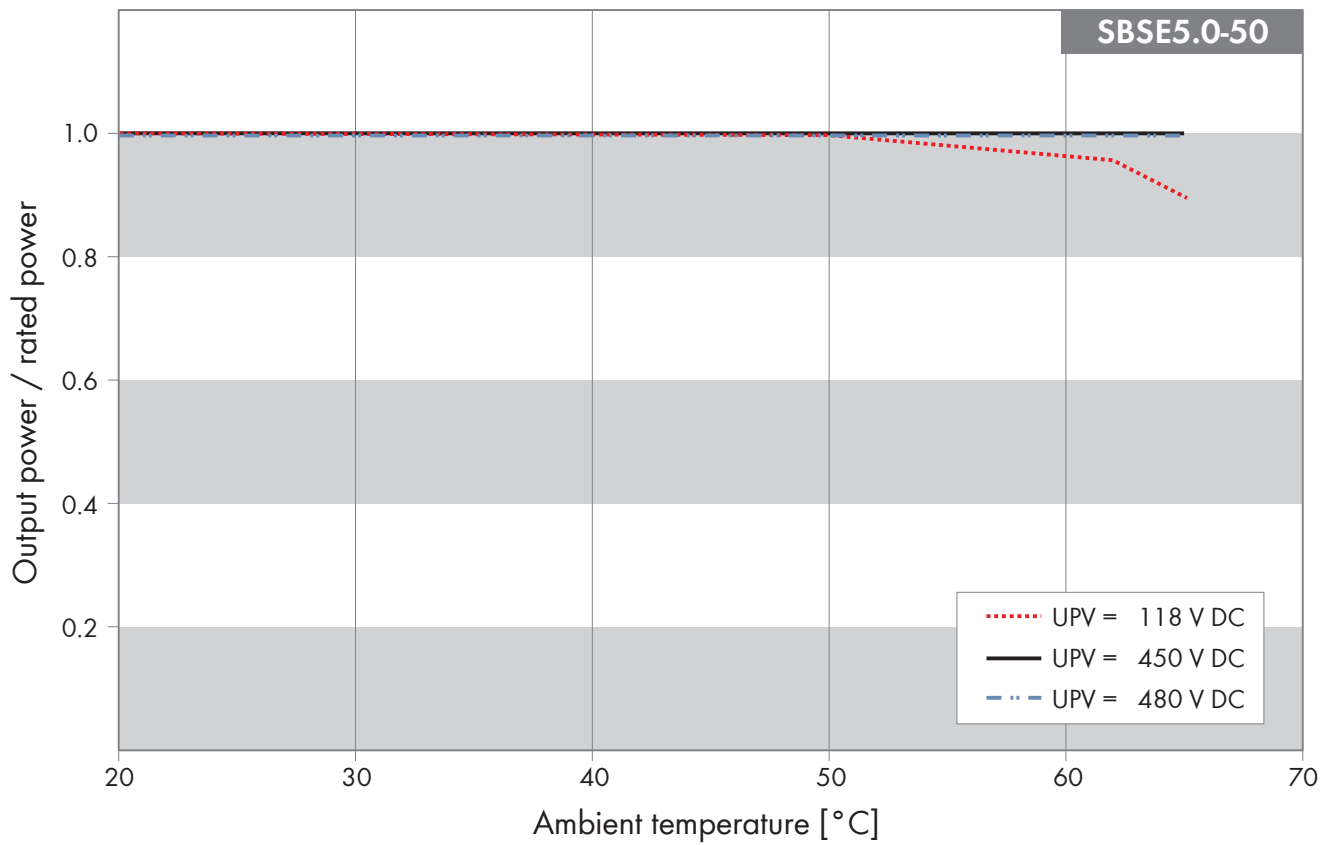

5.4 SBSE6.0-50

5.4.1 Efficiency

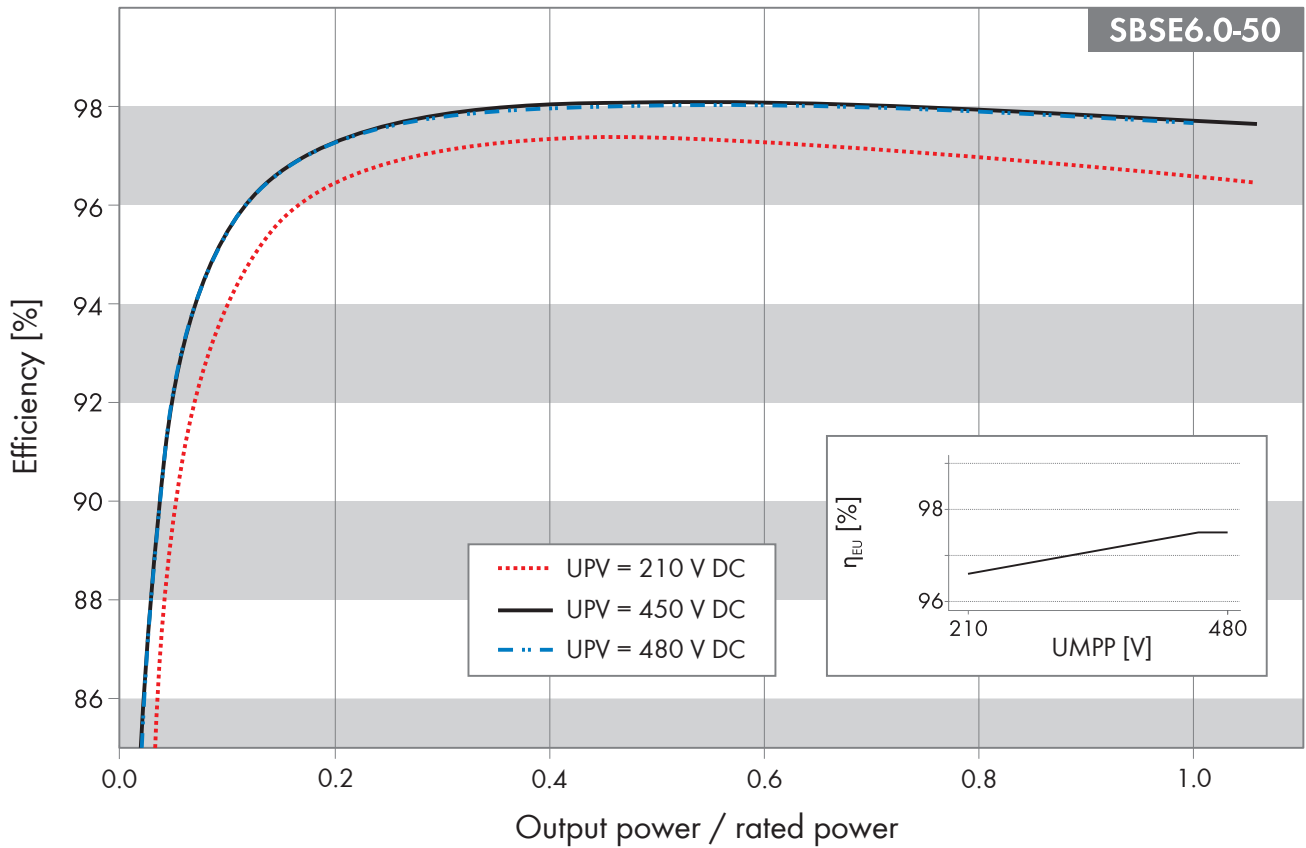


Maximum efficiency, η_{max} 98.0%

European weighted efficiency, η_{EU} 97.5%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 450 V	Maximum MPP voltage 480 V
5%	90.0%	92.5%	92.2%
10%	94.3%	95.7%	95.5%
20%	96.5%	97.3%	97.3%
25%	96.9%	97.7%	97.6%
30%	97.1%	97.8%	97.8%
50%	97.3%	98.0%	98.0%
75%	96.9%	97.9%	97.9%
100%	96.4%	97.6%	97.7%


5.4.2 Derating behavior

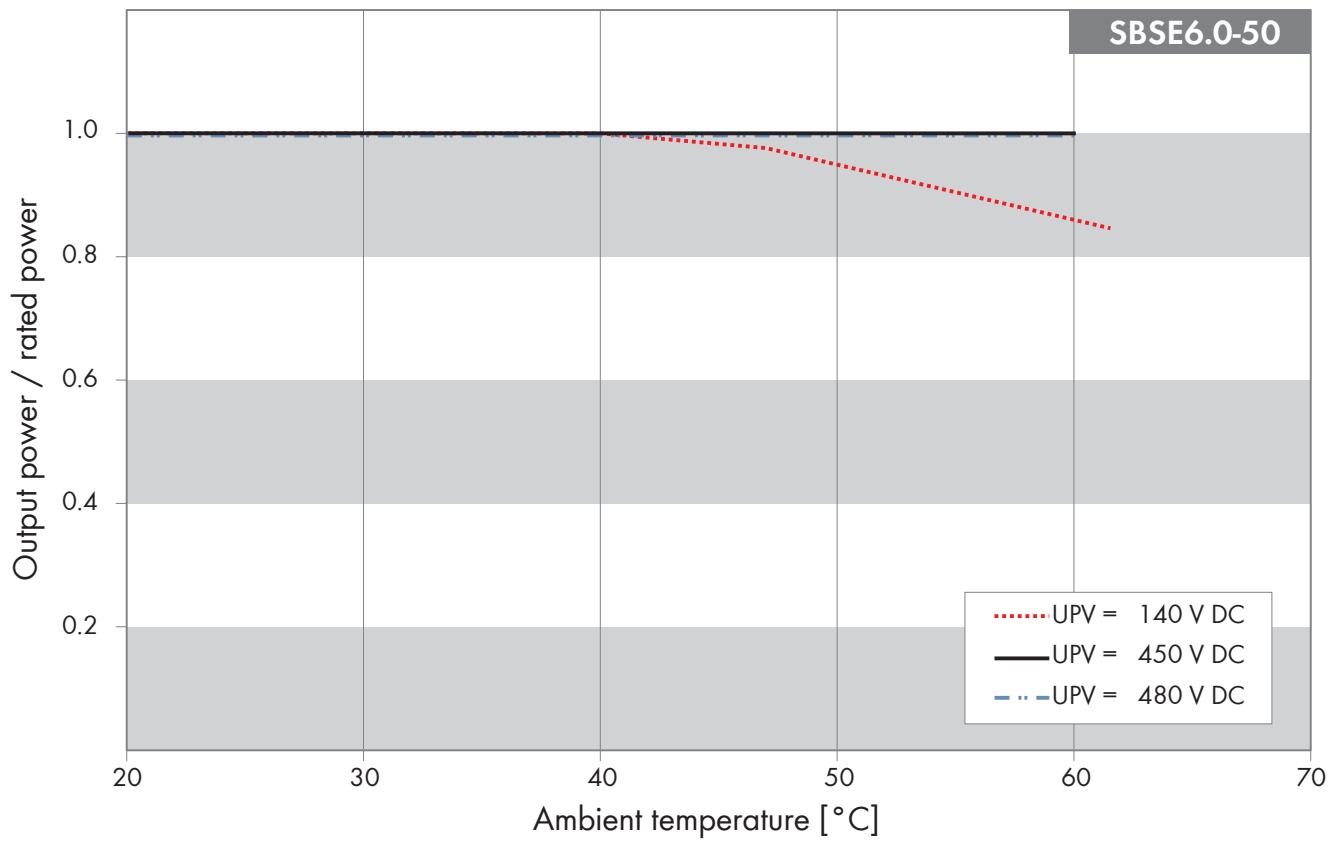


6 Sunny Island

6.1 SI4.4M-13

6.1.1 Efficiency

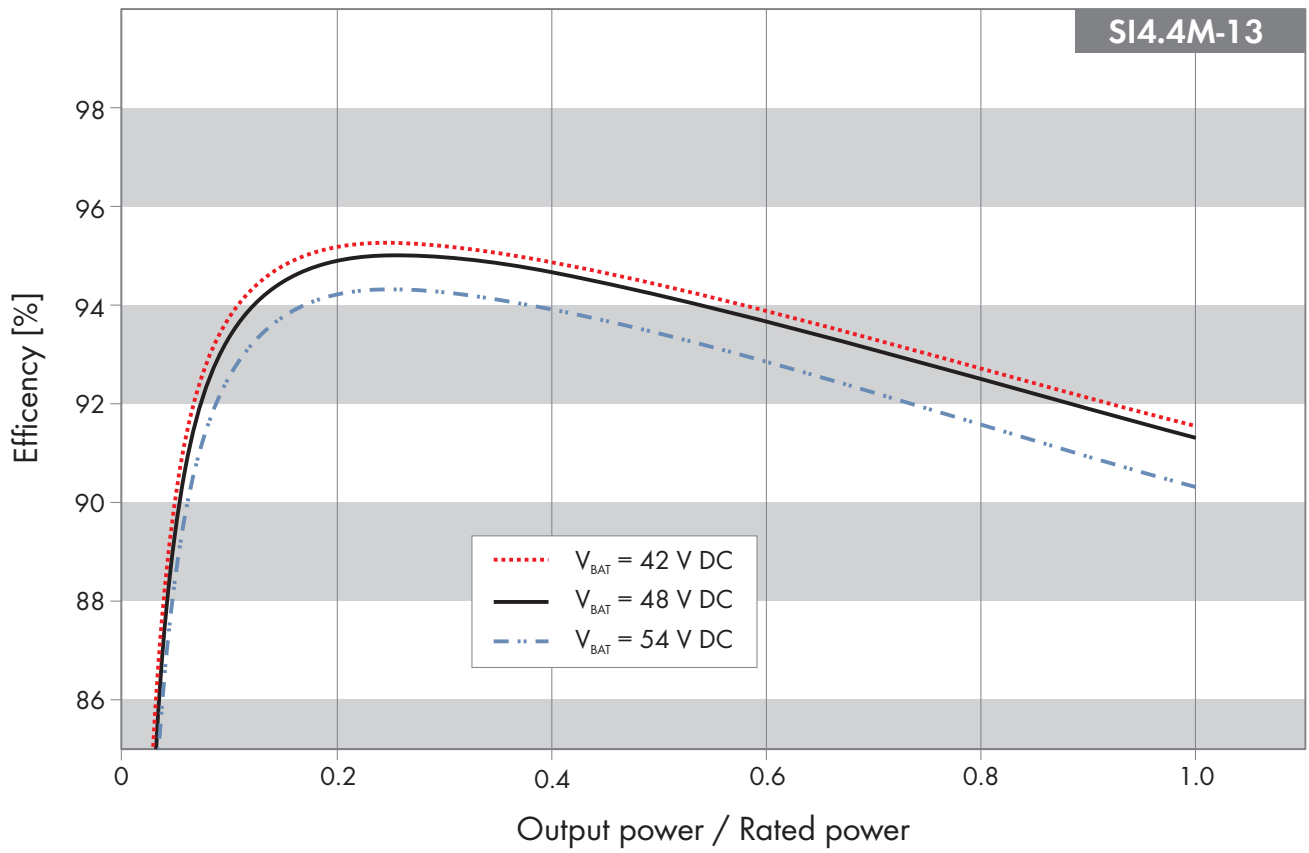


6.1.2 Derating Behavior

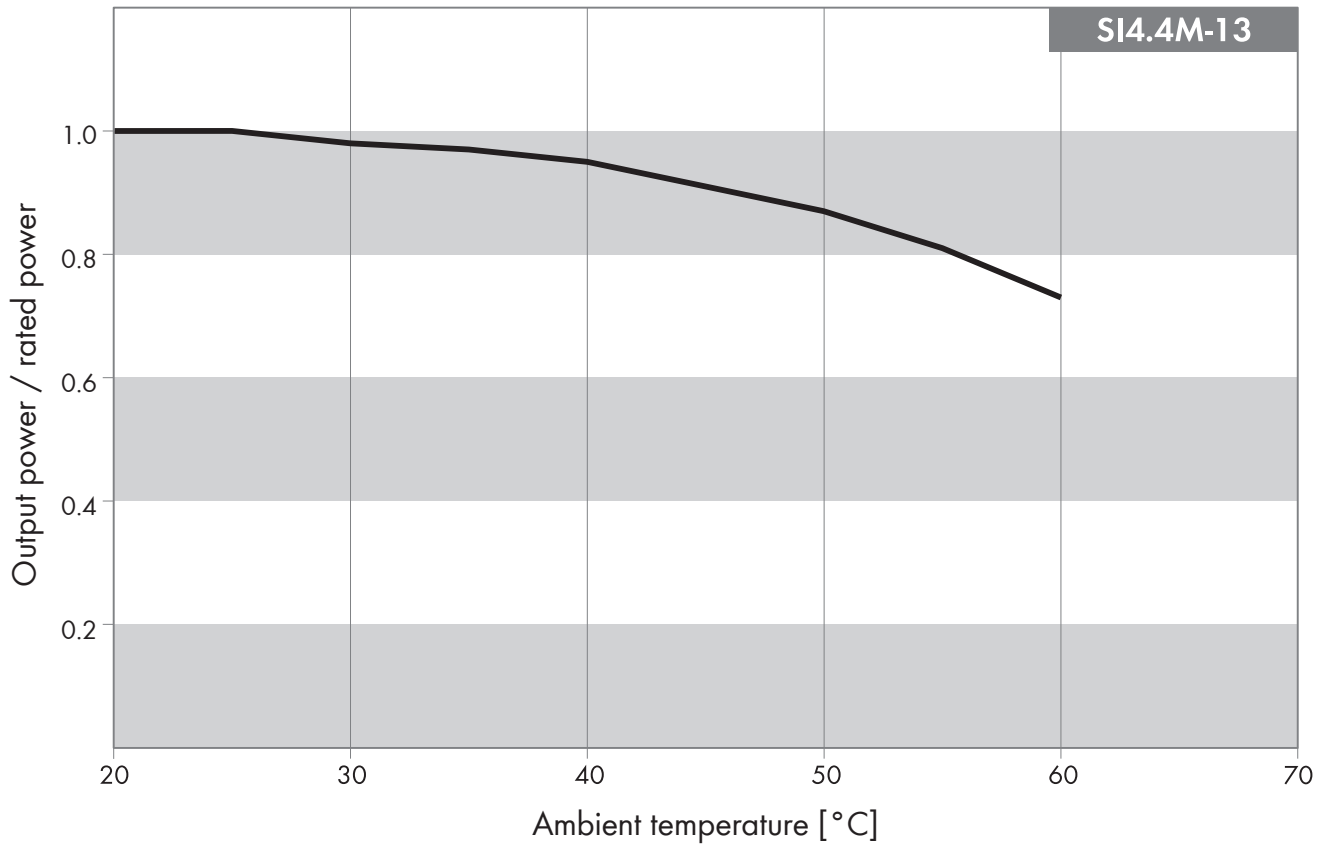


6.2 SI6.0H-13

6.2.1 Efficiency

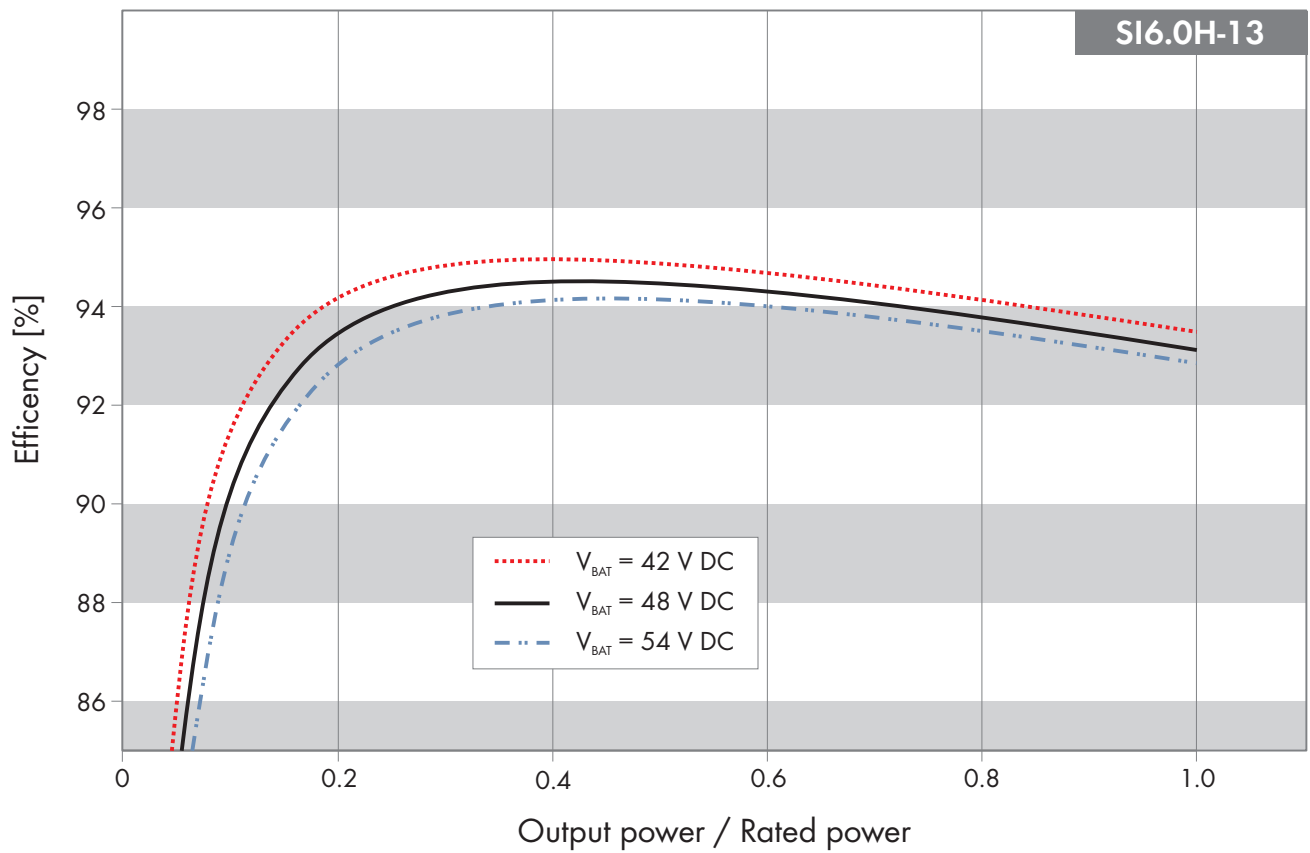


6.2.2 Derating Behavior

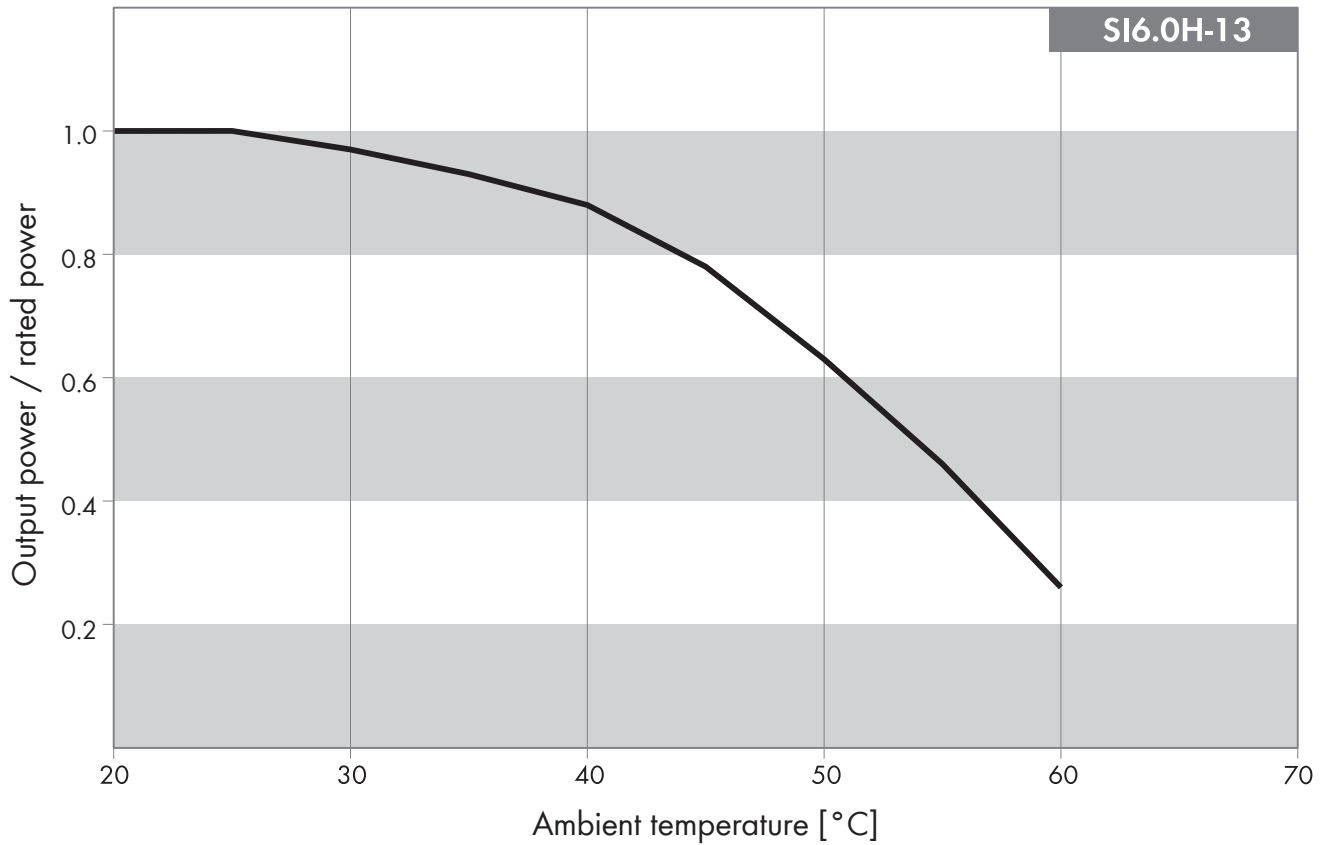


6.3 SI8.0H-13

6.3.1 Efficiency

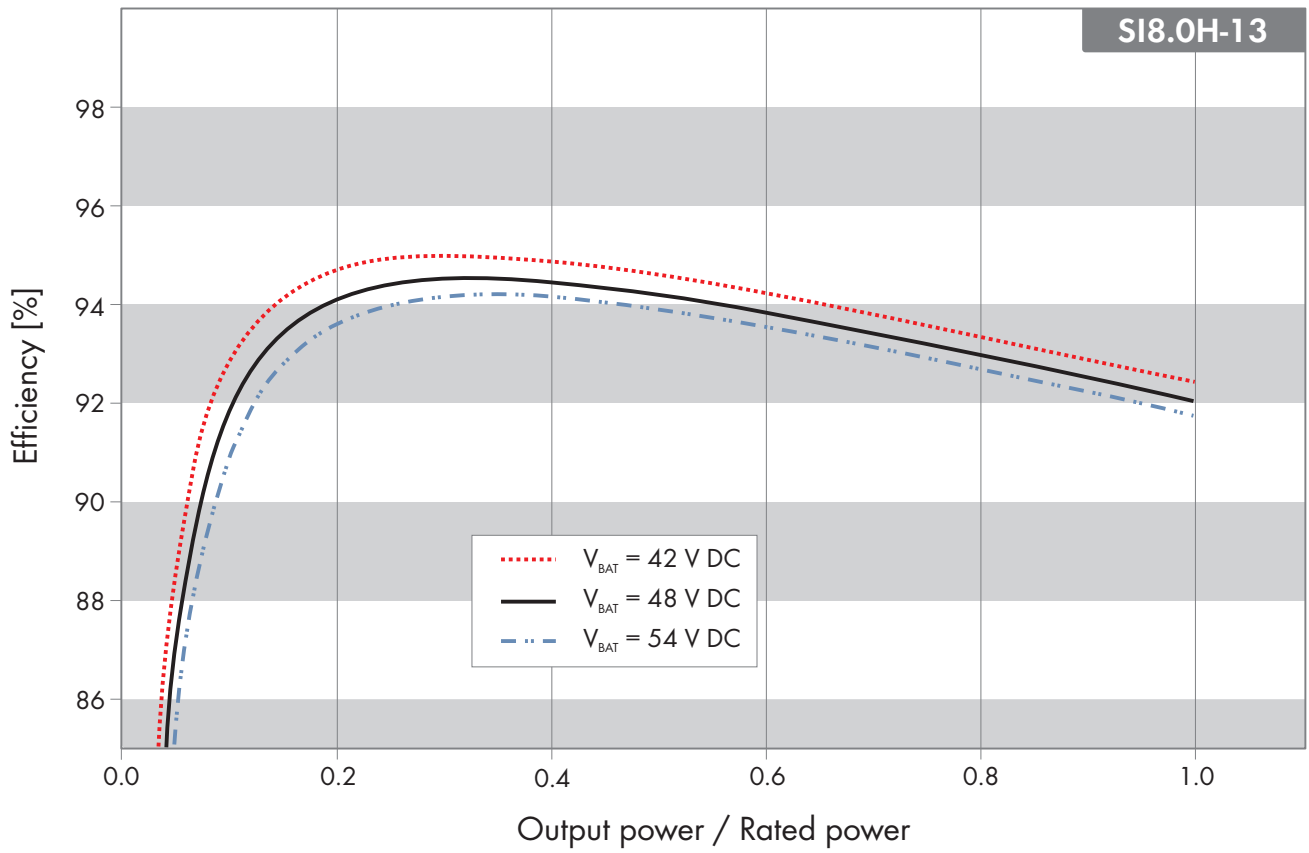


6.3.2 Derating Behavior

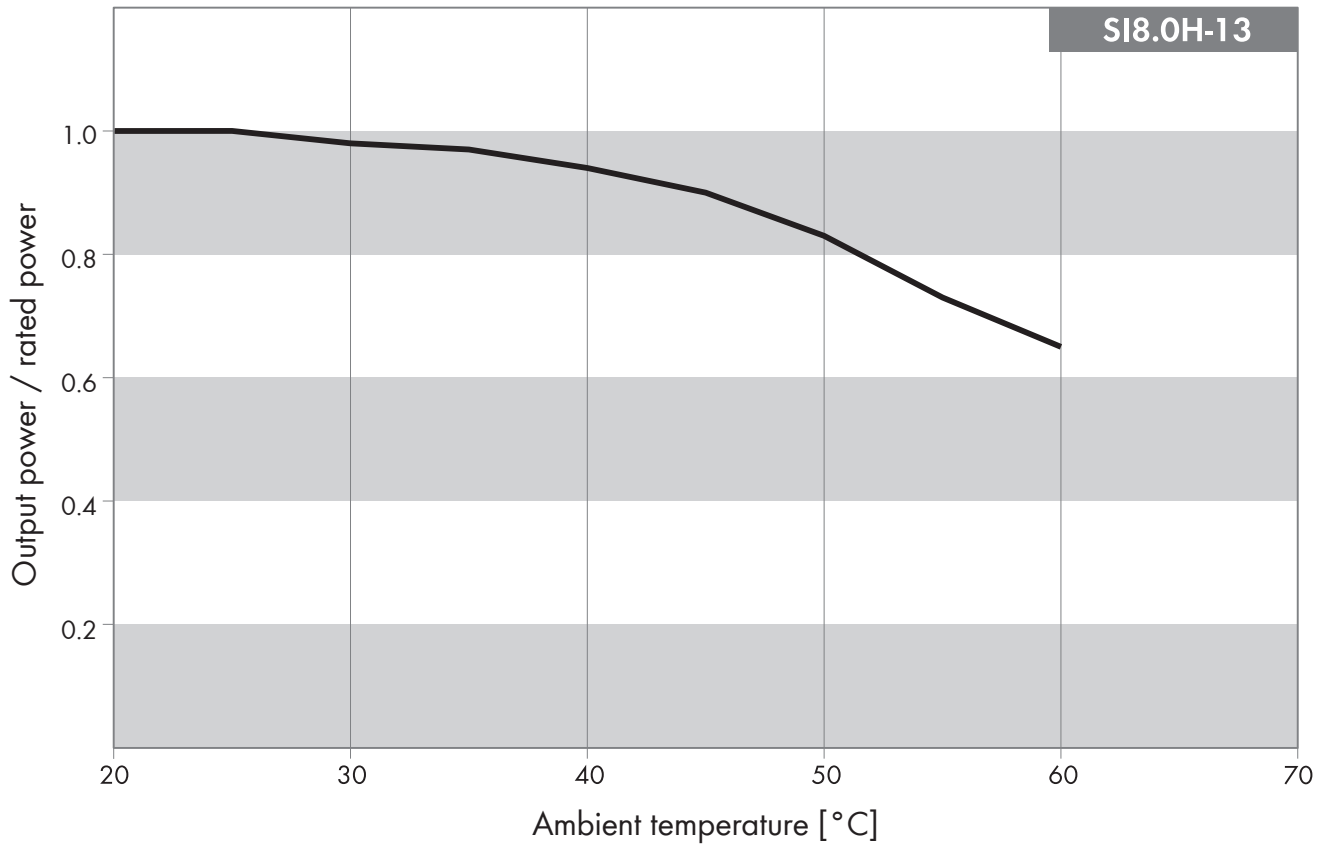

7 Sunny Tripower

7.1 STP 12-50

7.1.1 Efficiency

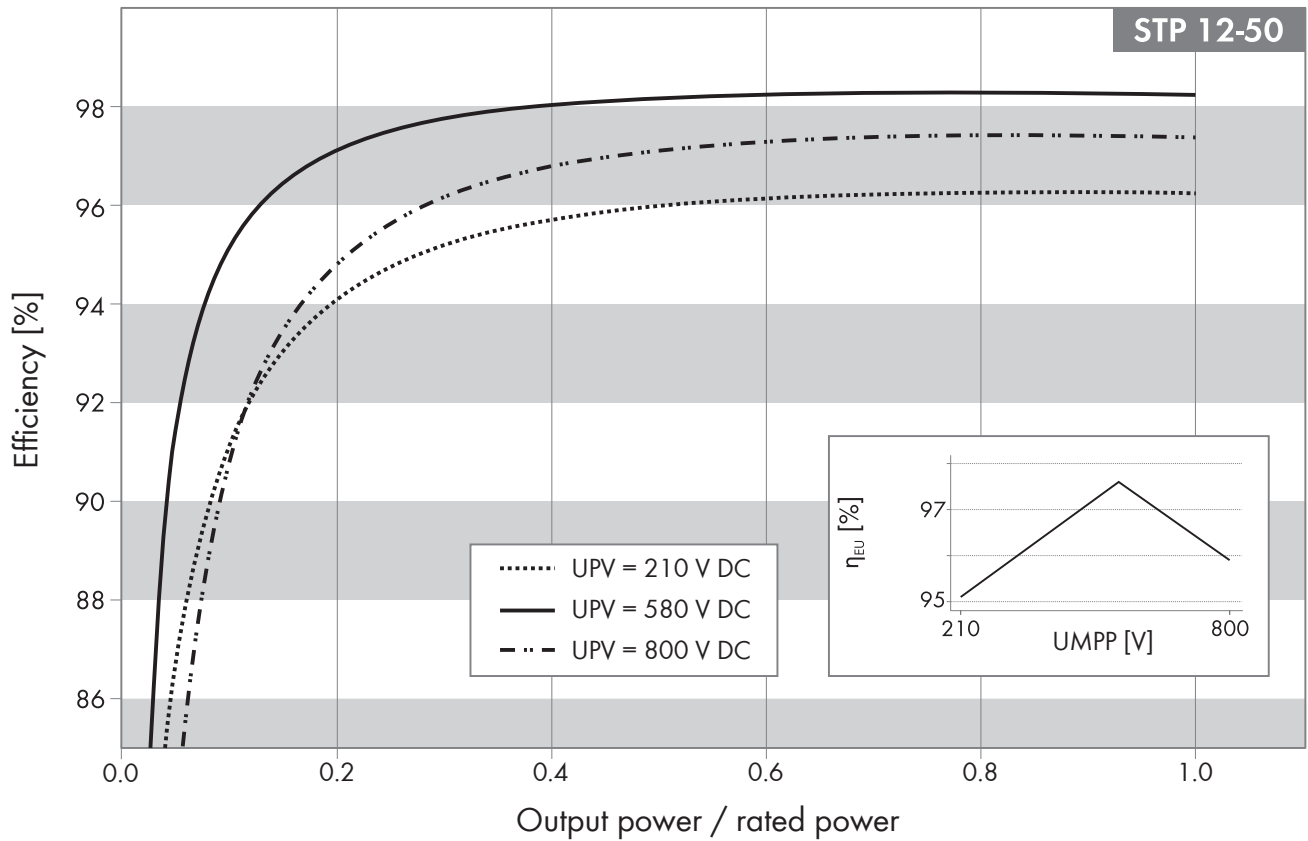


Maximum efficiency, η_{max} 97.6 %

European weighted efficiency, η_{EU} 98.2 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	86.5 %	91.2 %	83.4%
10 %	91.1 %	95.1 %	90.7 %
20 %	94.1 %	97.91%	94.8 %
25 %	94.7 %	97.5 %	95.6 %
30 %	95.1 %	97.7 %	96.1 %
50 %	96.0 %	98.1 %	97.1 %
75 %	96.2 %	98.2 %	97.4 %
100 %	96.2 %	98.2 %	97.3 %

7.1.2 Derating Behavior

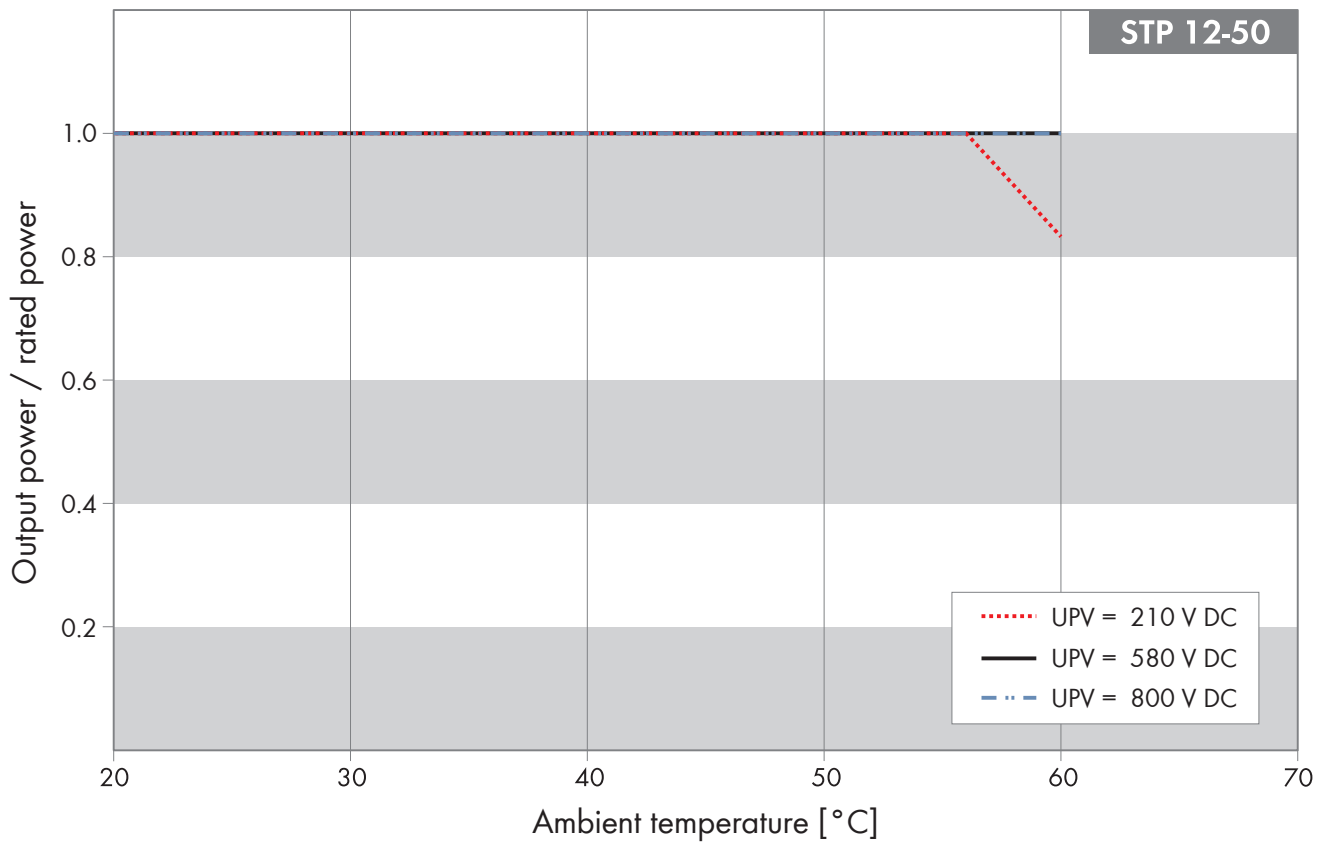

7.2 STP 15-50

7.2.1 Efficiency

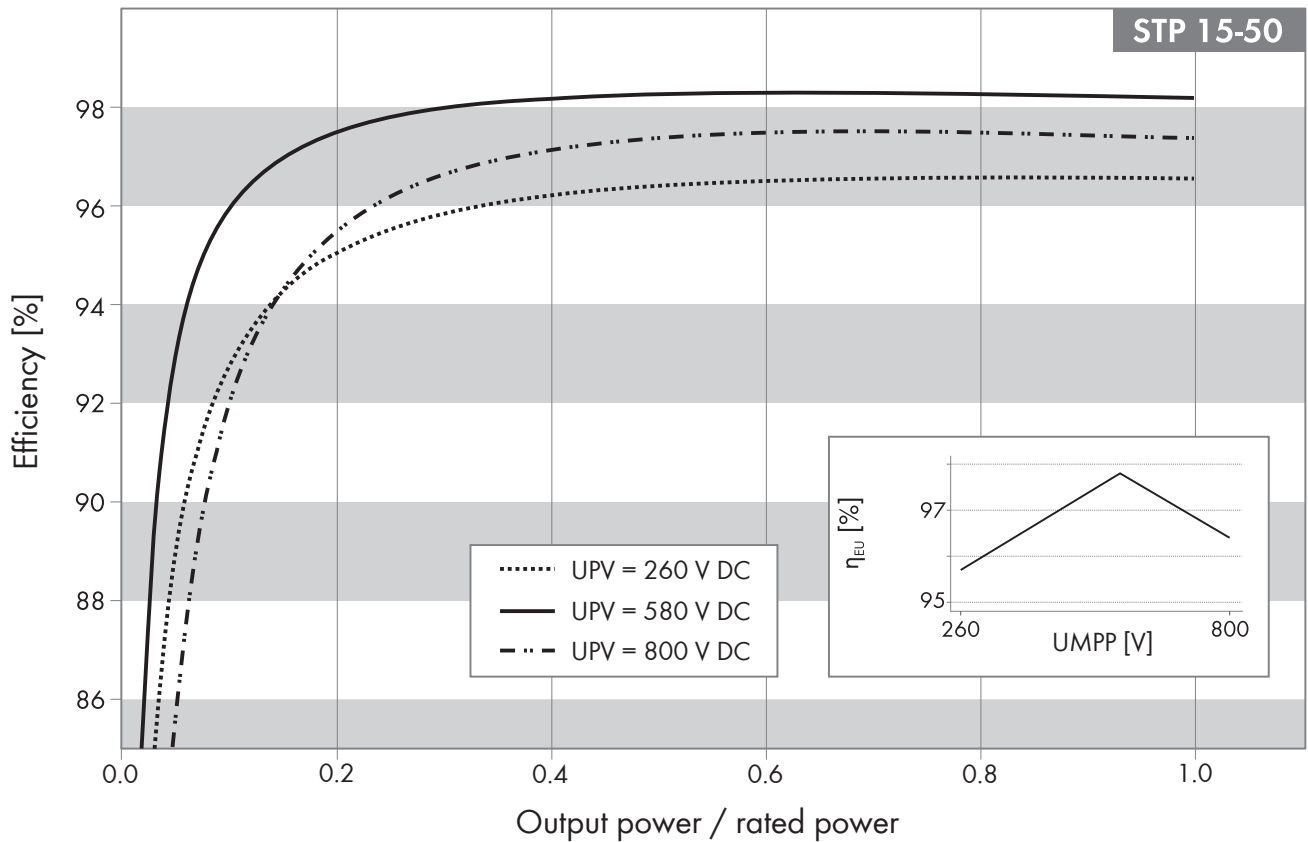


Maximum efficiency, η_{max} 98.2 %

European weighted efficiency, η_{EU} 97.8 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	88.9 %	92.9 %	85.5 %
10 %	92.7 %	95.9 %	91.9 %
20 %	95.1 %	97.5 %	95.5 %
25 %	95.5 %	97.8 %	96.2 %
30 %	95.8 %	98.0 %	96.6 %
50 %	96.4 %	98.3 %	97.4 %
75 %	96.6 %	98.3 %	97.5 %
100 %	96.6 %	98.2 %	97.4 %

7.2.2 Derating Behavior

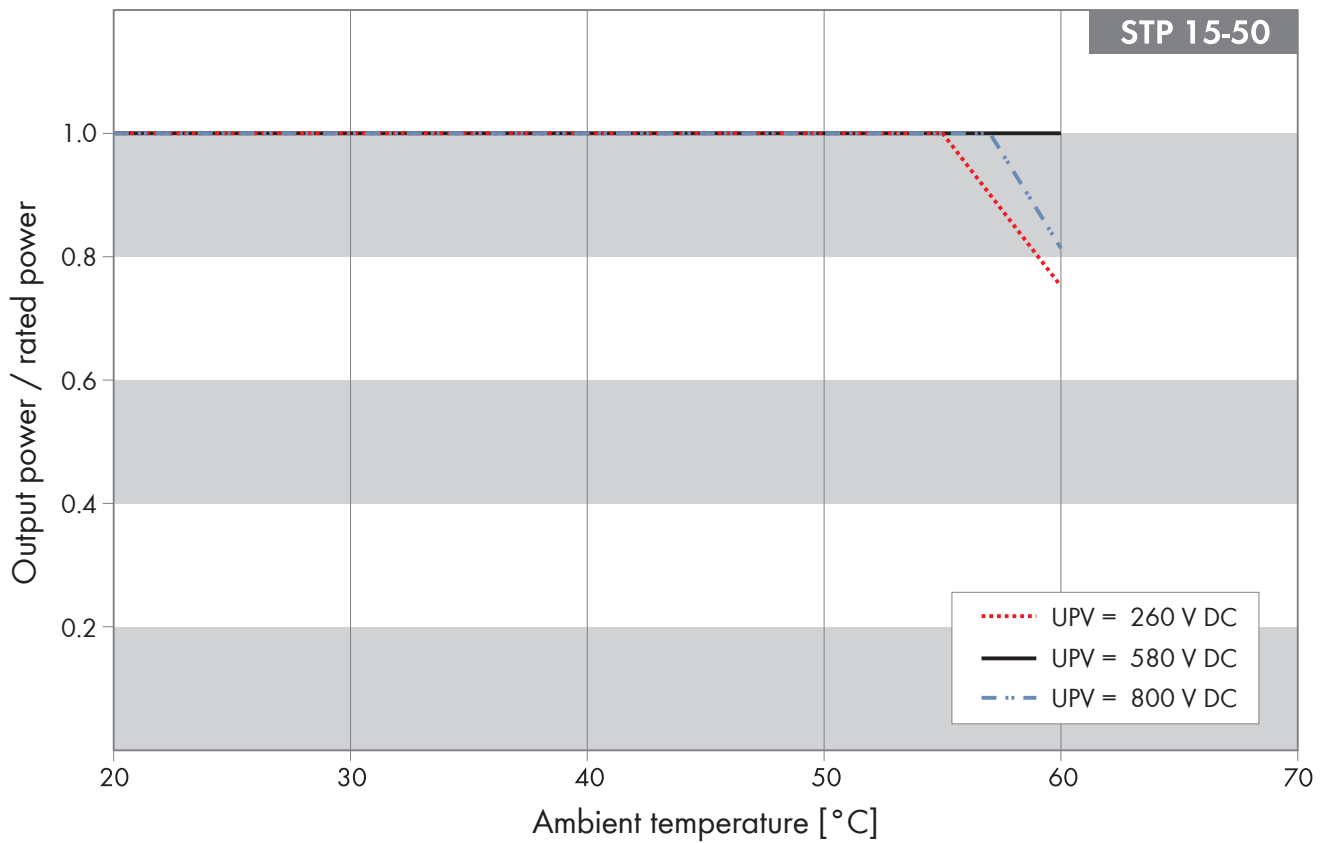

7.3 STP 20-50

7.3.1 Efficiency

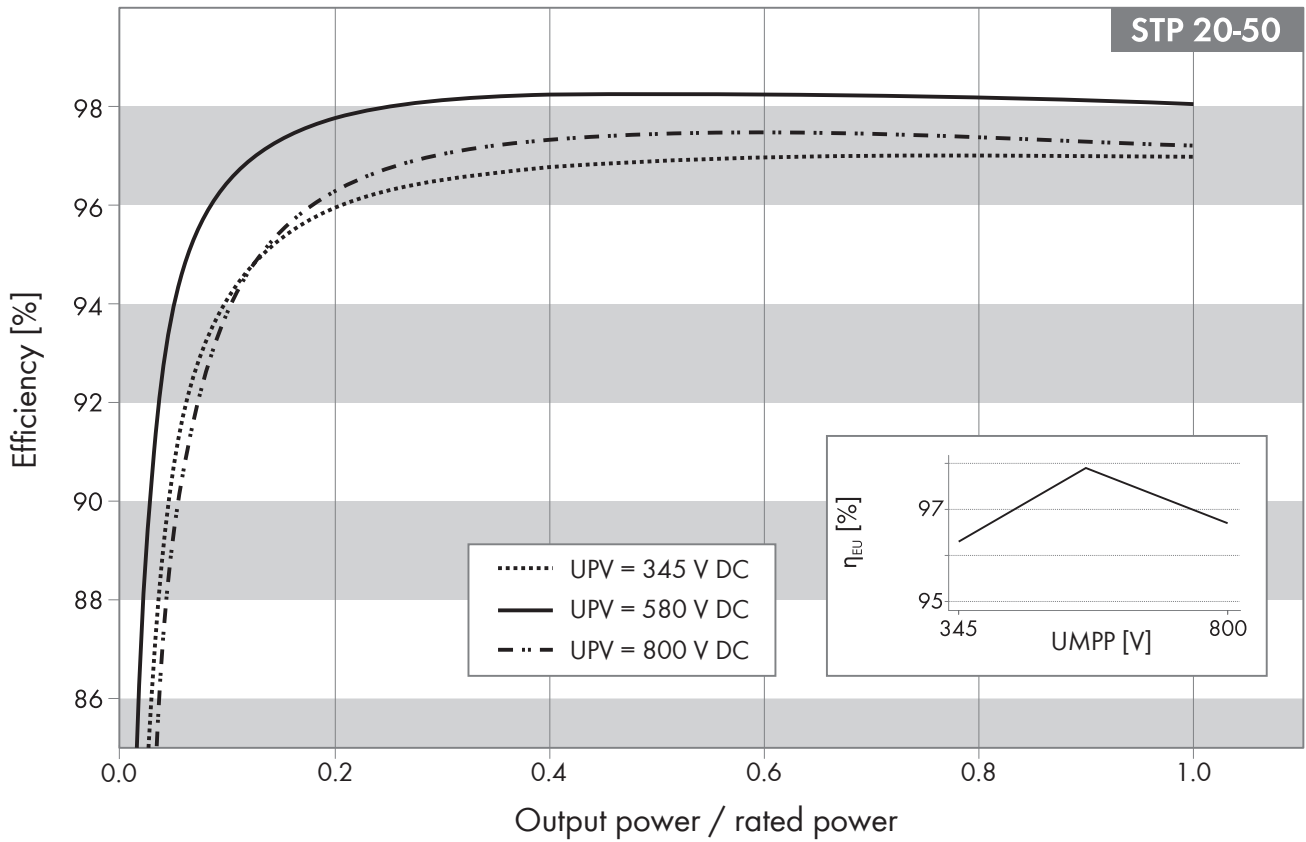


Maximum efficiency, η_{max} 98.2 %

European weighted efficiency, η_{EU} 97.9 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 345 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	90.6 %	93.9 %	89.2 %
10 %	94.1 %	96.5 %	93.8 %
20 %	95.9 %	97.7 %	96.3 %
25 %	96.3 %	98.0 %	96.7 %
30 %	96.5 %	98.1 %	97.0 %
50 %	96.9 %	98.3 %	97.4 %
75 %	97.0 %	98.2 %	97.4 %
100 %	97.0 %	98.0 %	97.2 %

7.3.2 Derating Behavior

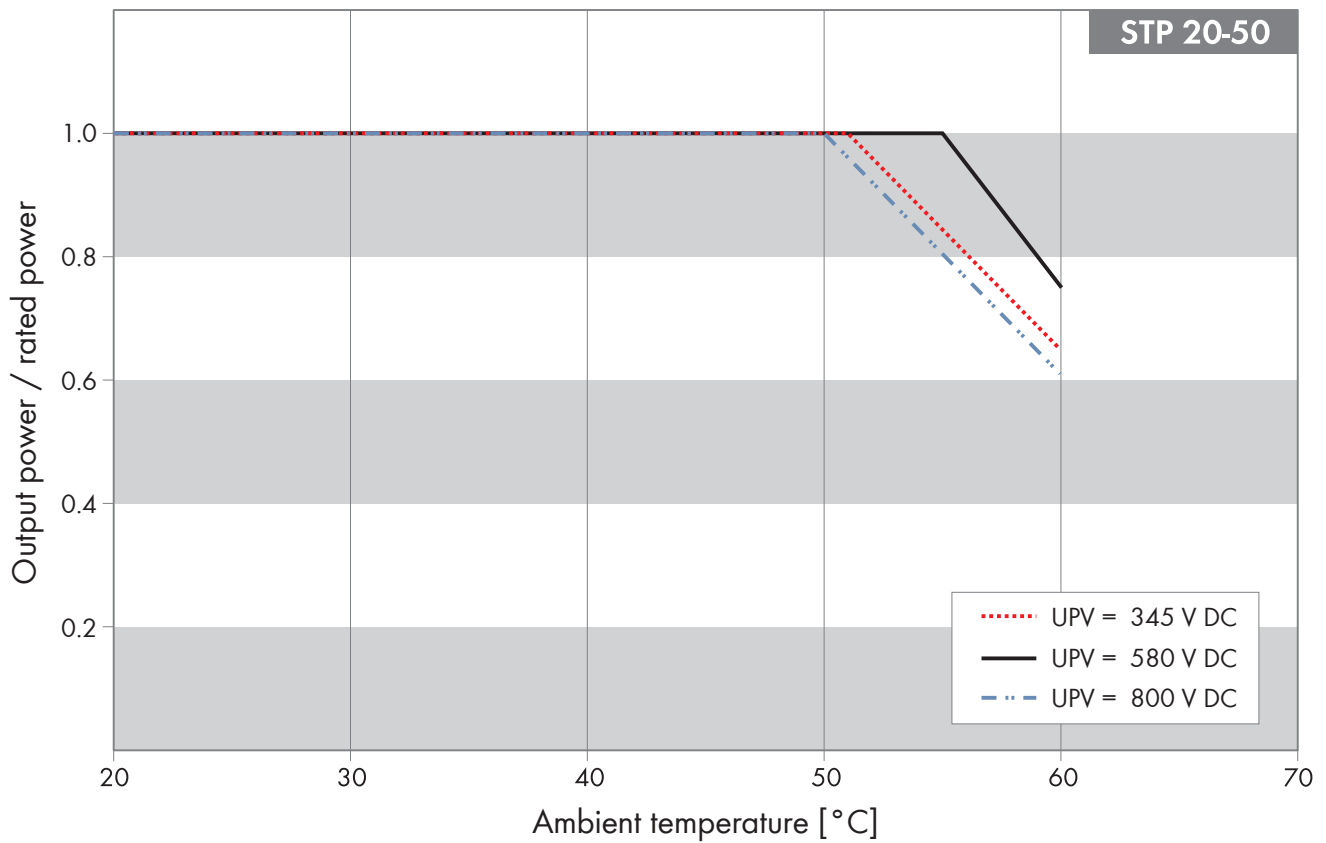

7.4 STP 25-50

7.4.1 Efficiency

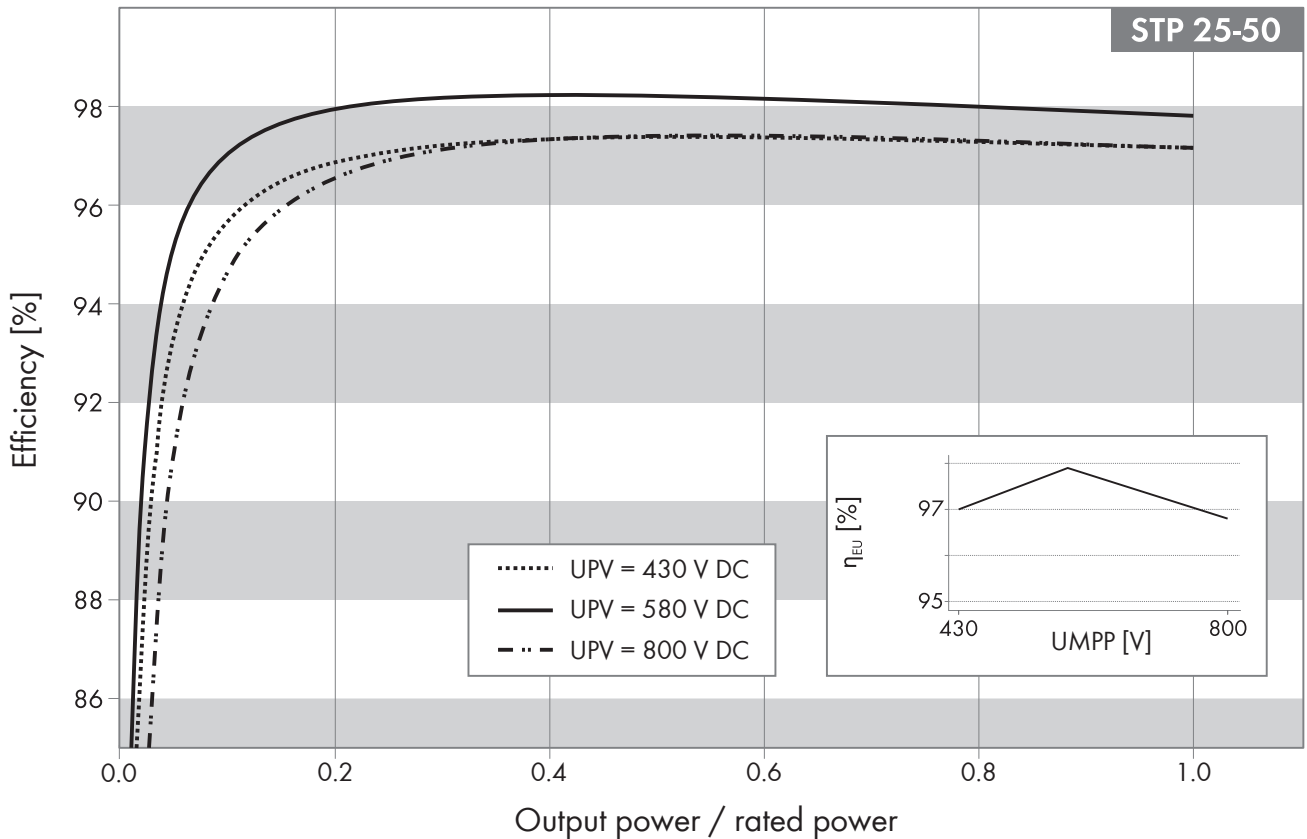


Maximum efficiency, η_{max} 98.2 %

European weighted efficiency, η_{EU} 98.0 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 430 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	93.2 %	95.1 %	90.8 %
10 %	95.7 %	97.0 %	94.6 %
20 %	96.9 %	97.9 %	96.5 %
25 %	97.1 %	98.1 %	96.9 %
30 %	97.2 %	98.2 %	97.1 %
50 %	97.4 %	98.2 %	97.4 %
75 %	97.3 %	98.1 %	97.3 %
100 %	97.2 %	97.8 %	97.1 %

7.4.2 Derating Behavior

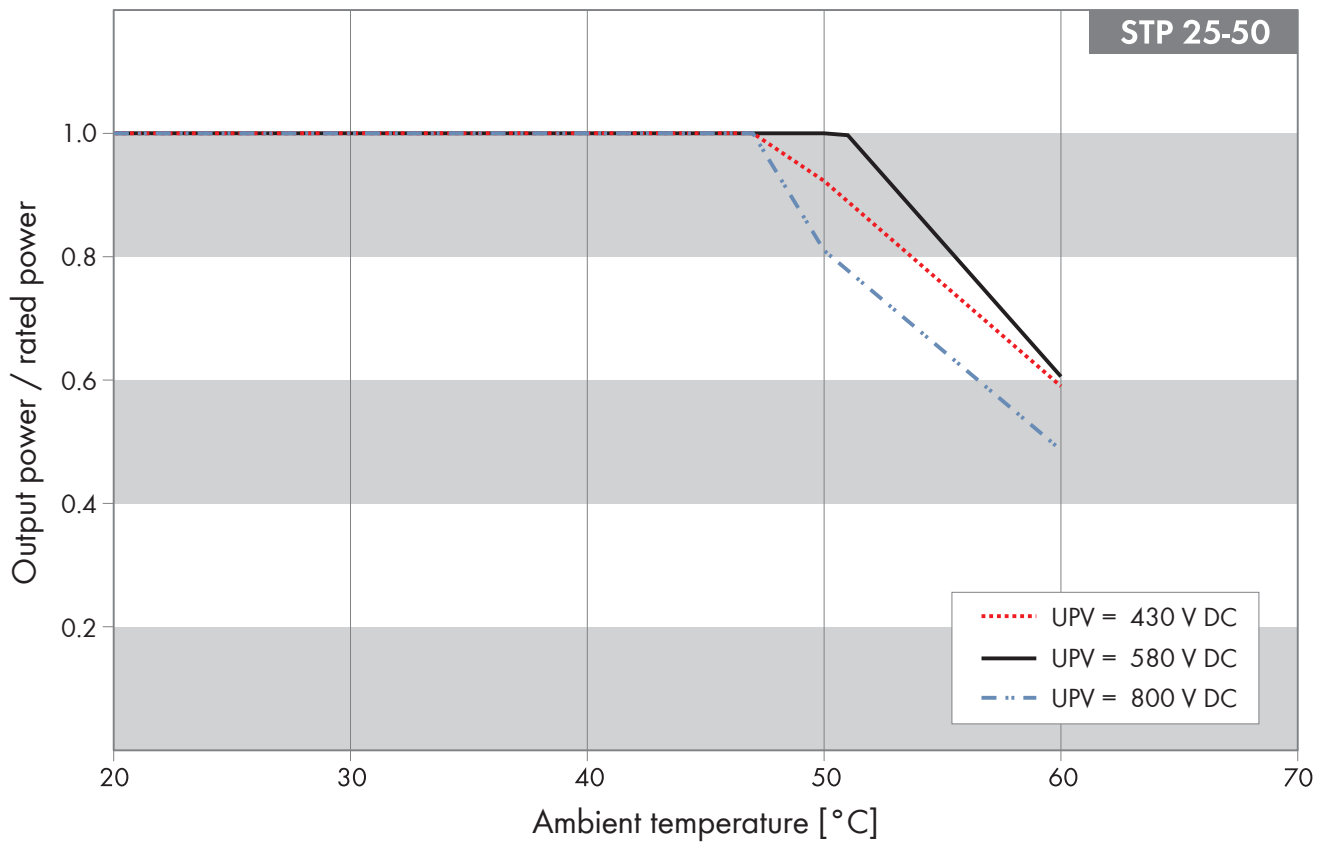

7.5 STP 50-41

7.5.1 Efficiency

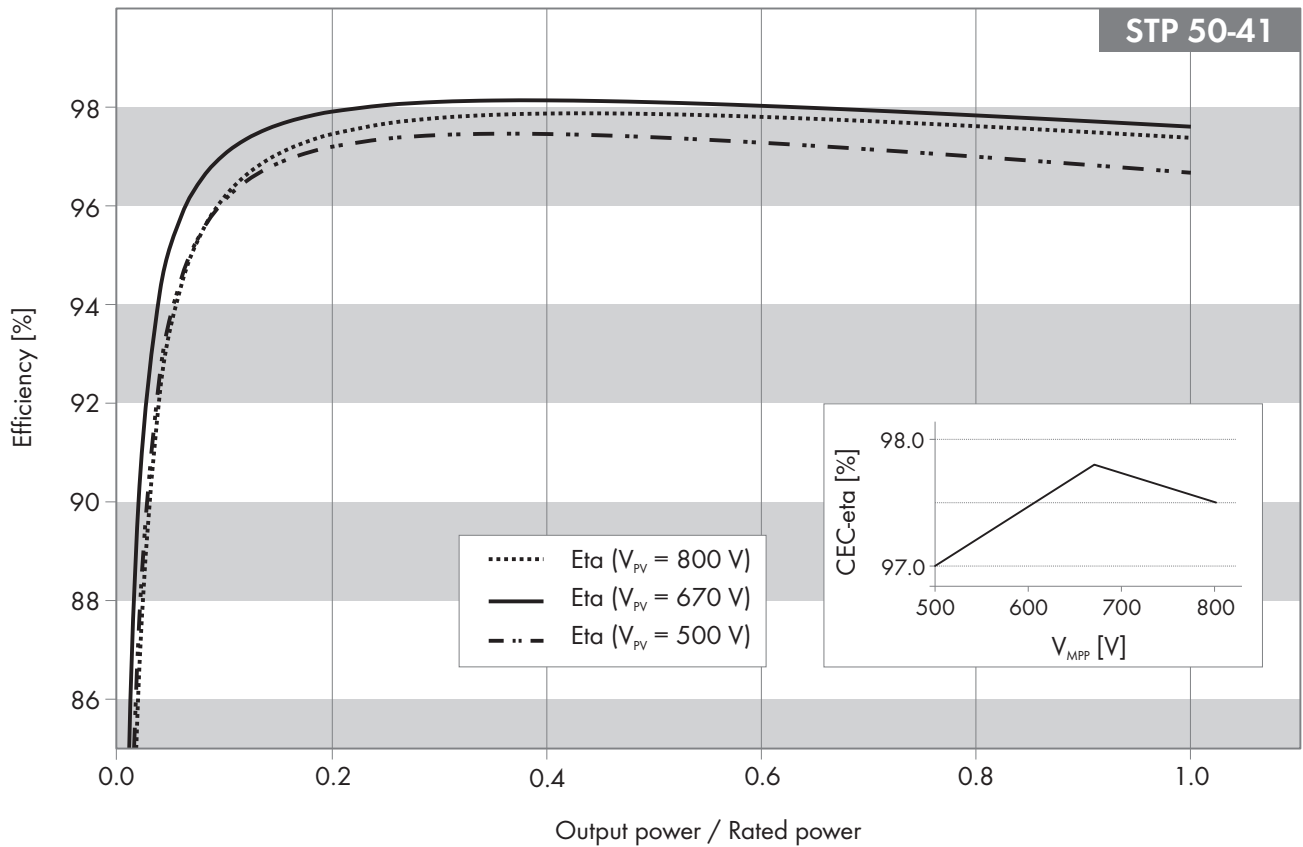


Maximum efficiency, η_{max} 98.1 %

European weighted efficiency, η_{EU} 97.8 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 500 V	Rated input voltage 670 V	Maximum MPP voltage 800 V
5 %	93.7 %	95.2 %	93.5 %
10 %	96.1 %	97.0 %	96.2 %
20 %	97.2 %	97.9 %	97.4 %
25 %	97.3 %	98.0 %	97.6 %
30 %	97.4 %	98.1 %	97.8 %
50 %	97.4 %	98.1 %	97.8 %
75 %	97.1 %	97.9 %	97.6 %
100 %	96.7 %	97.6 %	97.4 %

7.5.2 Derating Behavior

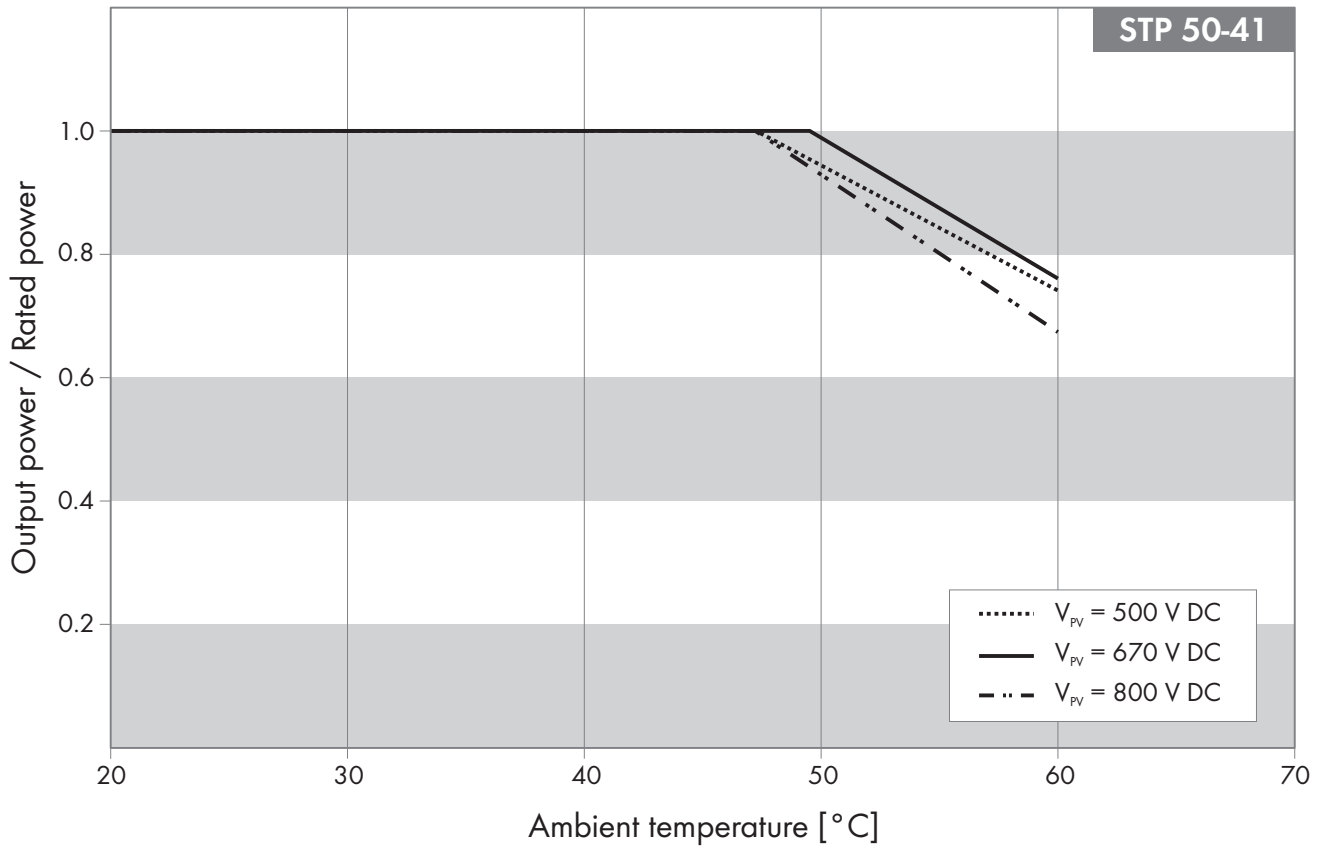

7.6 STP 110-60

7.6.1 Efficiency

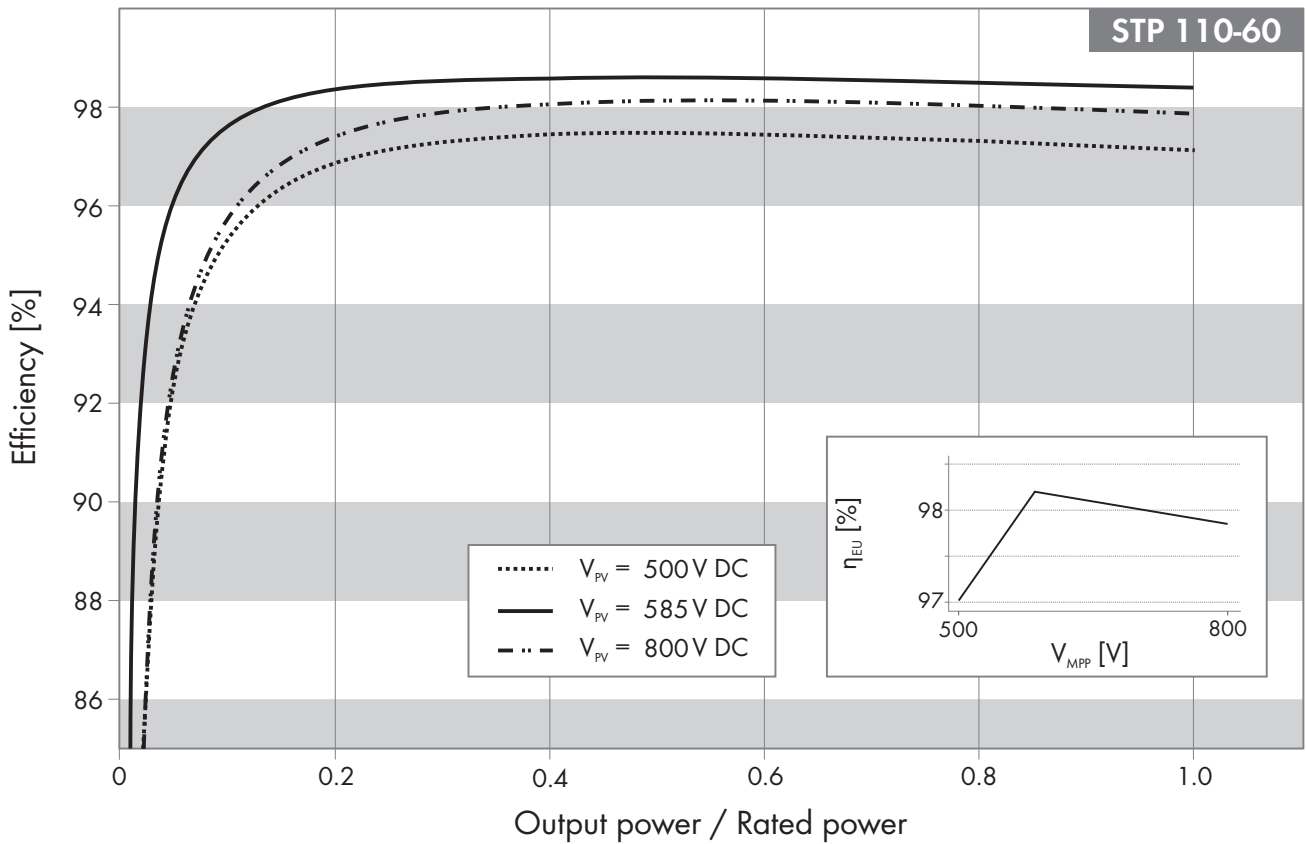


Maximum efficiency, η_{max}	98.6 %
European weighted efficiency, η_{EU}	98.4 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 500 V	Rated input voltage 585 V	Maximum MPP voltage 800 V
5 %	92.3 %	96.2 %	92.4 %
10 %	95.4 %	97.6 %	95.7 %
20 %	96.9 %	98.3 %	97.4 %
25 %	97.2 %	98.5 %	97.7 %
30 %	97.3 %	98.5 %	97.9 %
50 %	97.5 %	98.6 %	98.1 %
75 %	97.4 %	98.5 %	98.1 %
100 %	97.1 %	98.4 %	97.9 %

7.6.2 Derating Behavior

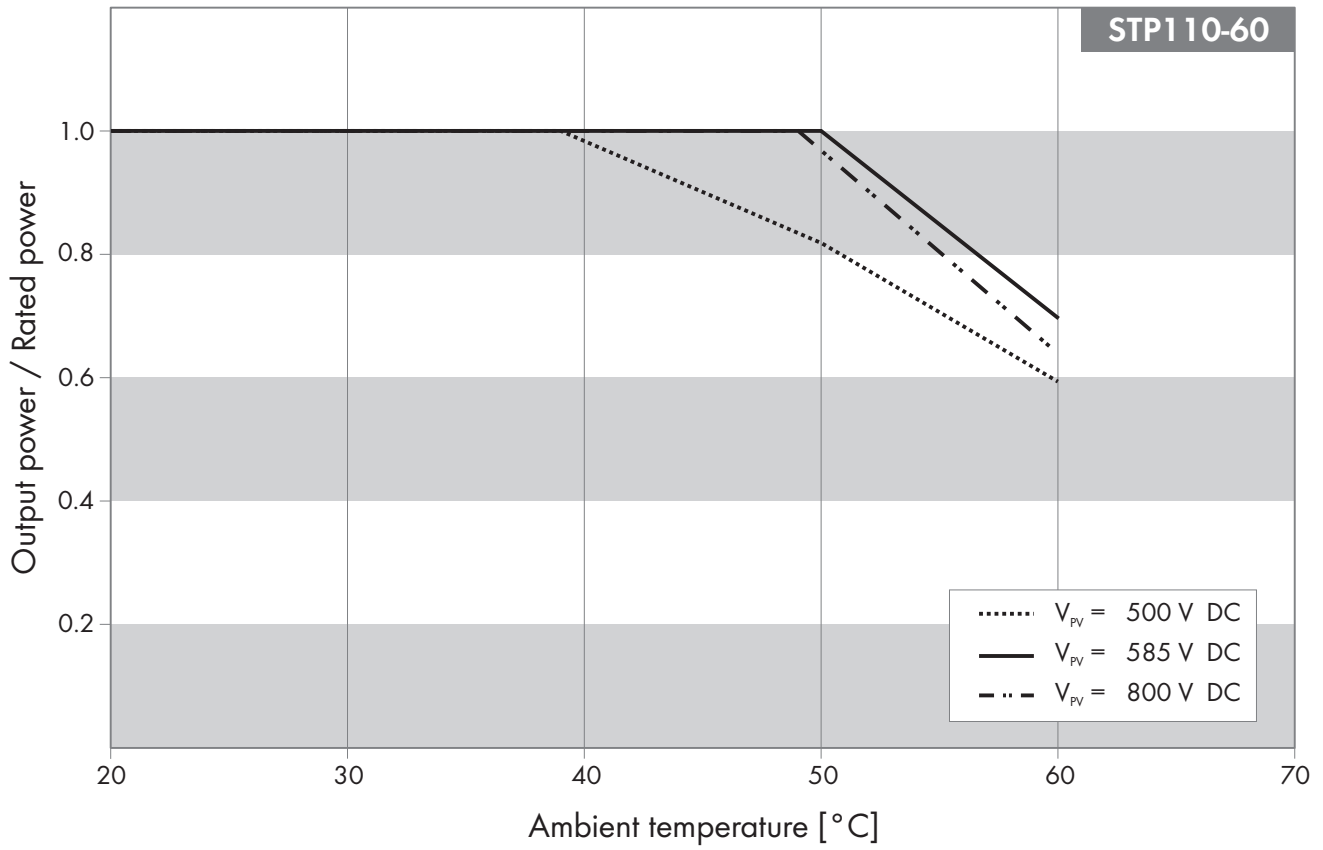

7.7 STP 125-70

7.7.1 Efficiency

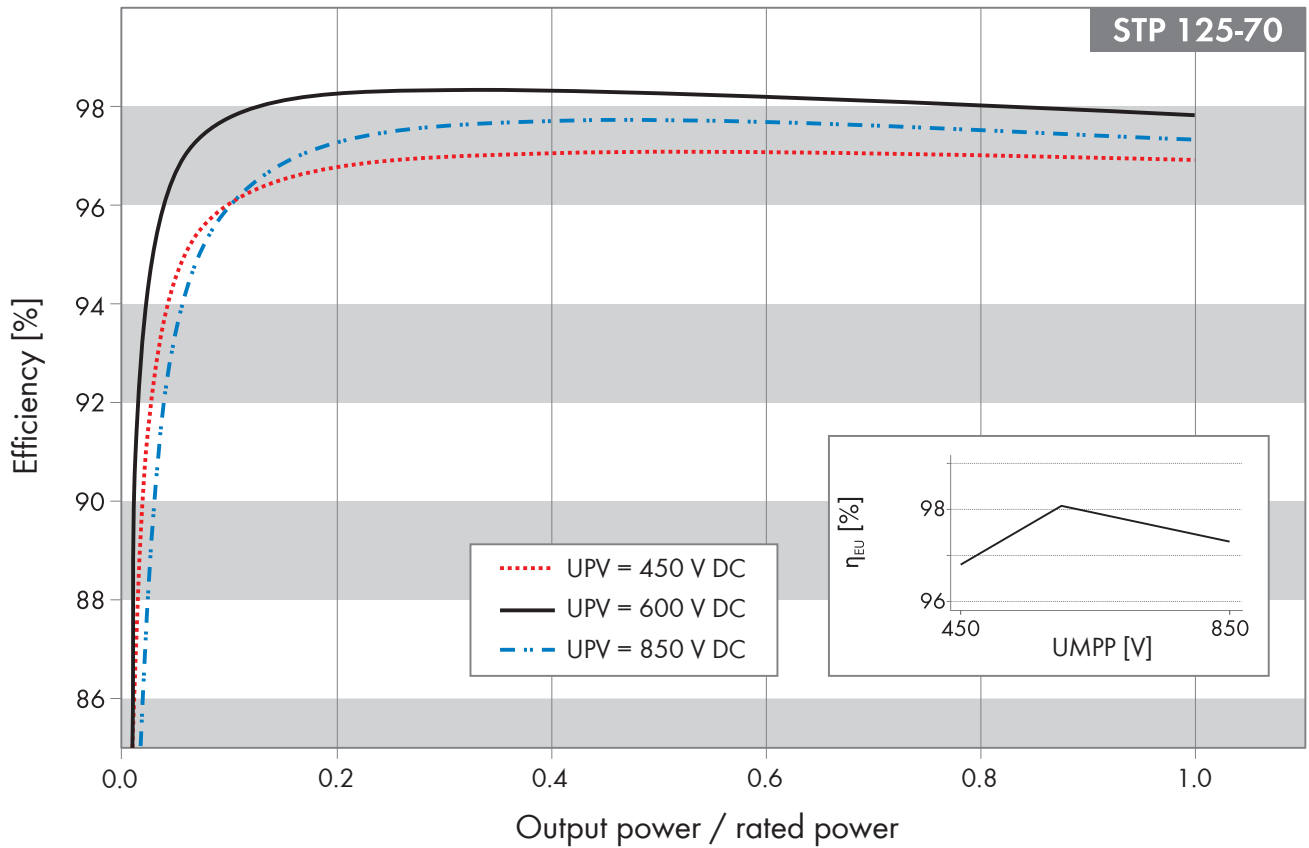


Maximum efficiency, η_{max} 98.3%

European weighted efficiency, η_{EU} 98.1%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 450 V	Rated input voltage 600 V	Maximum MPP voltage 850 V
5%	94.5%	96.6%	93.3%
10%	96.0%	97.8%	96.0%
20%	96.8%	98.3%	97.3%
25%	96.9%	98.3%	97.5%
30%	97.0%	98.4%	97.6%
50%	97.1%	98.3%	97.7%
75%	97.0%	98.1%	97.6%
100%	96.9%	97.8%	97.3%

7.7.2 Derating behavior

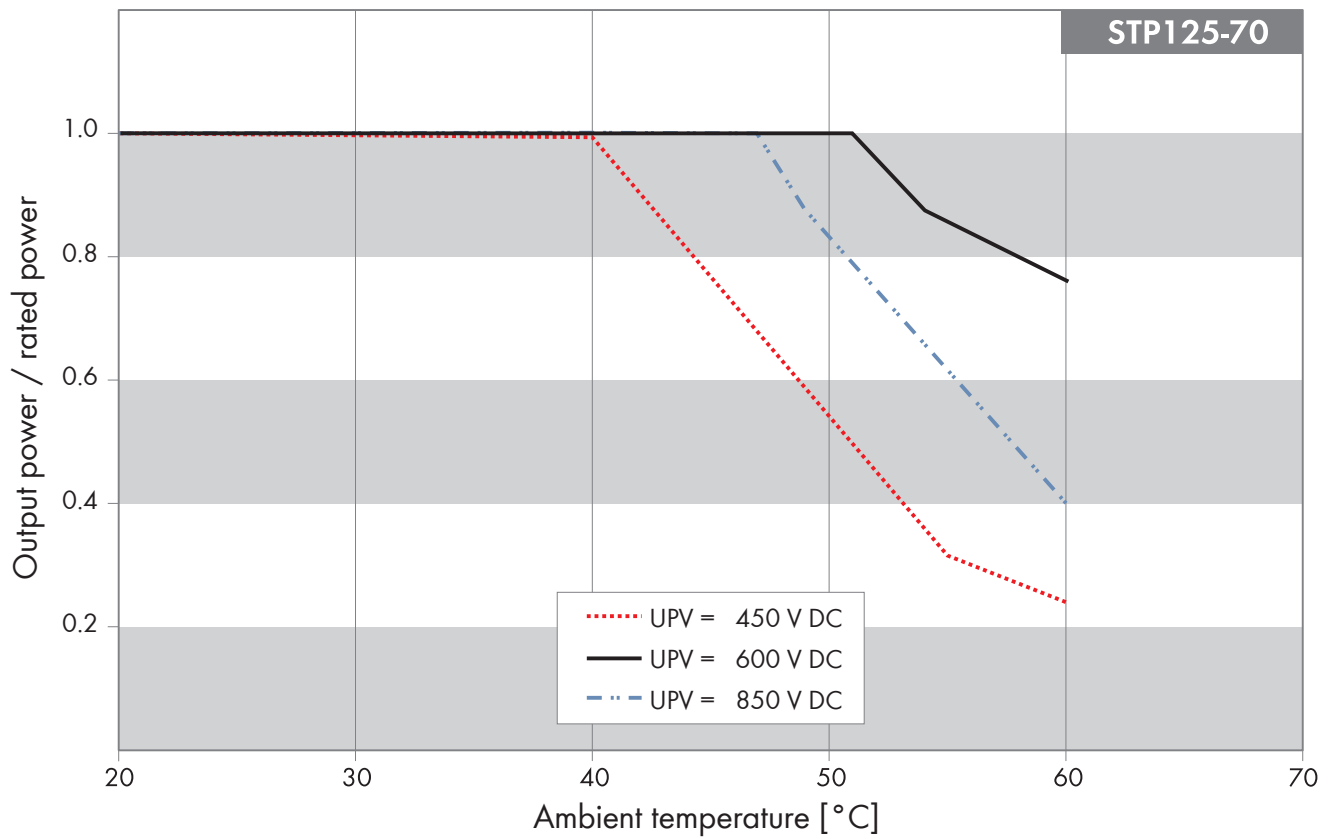

7.8 STP3.0-3AV-40

7.8.1 Efficiency when operating in TN or TT systems

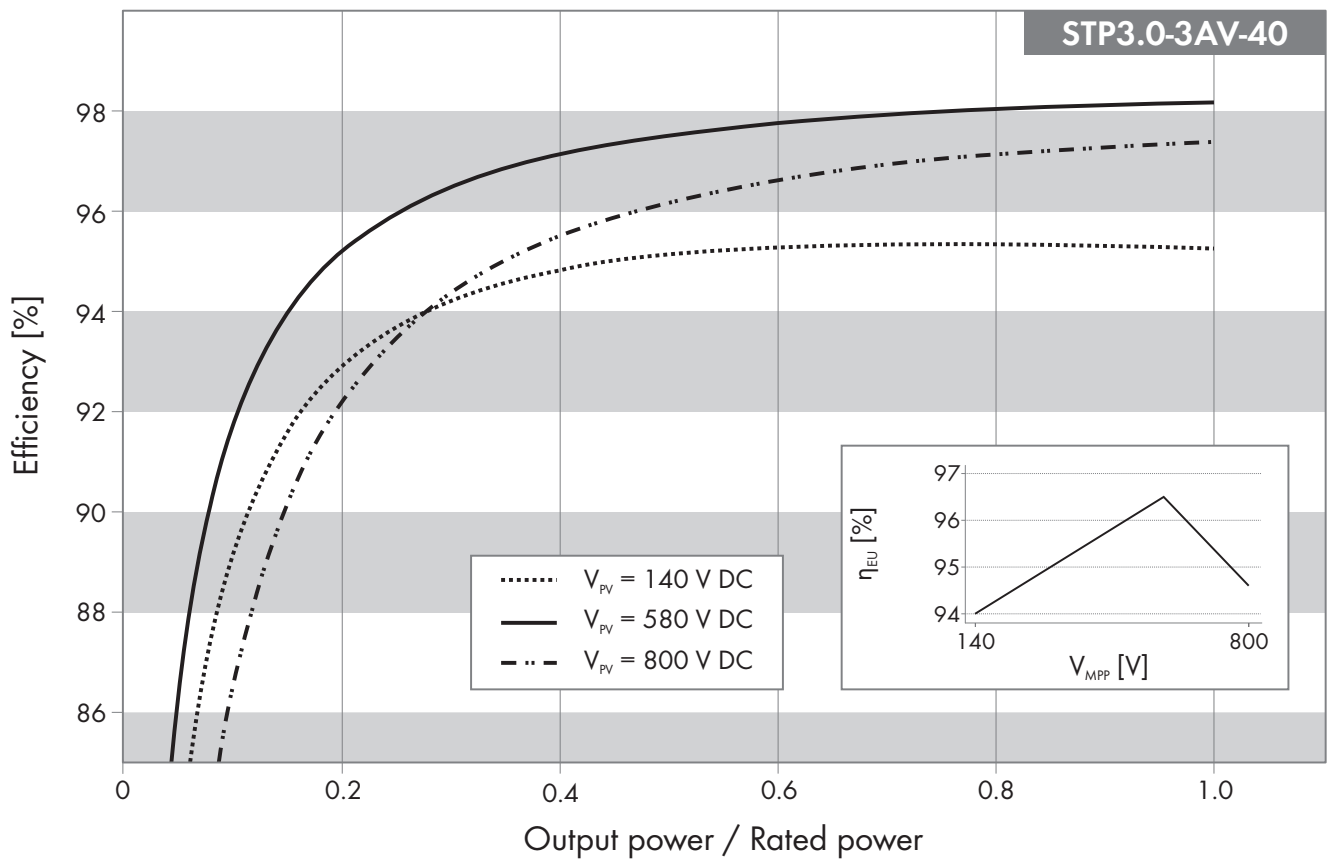

Maximum efficiency, η_{\max}

98.2 %


European weighted efficiency, η_{EU}

96.5 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 140 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	82.8 %	86.0 %	77.6 %
10 %	89.1 %	91.6 %	86.4 %
20 %	92.9 %	95.2 %	92.2 %
25 %	93.7 %	96.0 %	93.5 %
30 %	94.2 %	96.5 %	94.4 %
50 %	95.1 %	97.5 %	96.2 %
75 %	95.3 %	98.0 %	97.0 %
100 %	95.2 %	98.2 %	97.4 %

7.8.2 Efficiency when operating in a Delta IT system

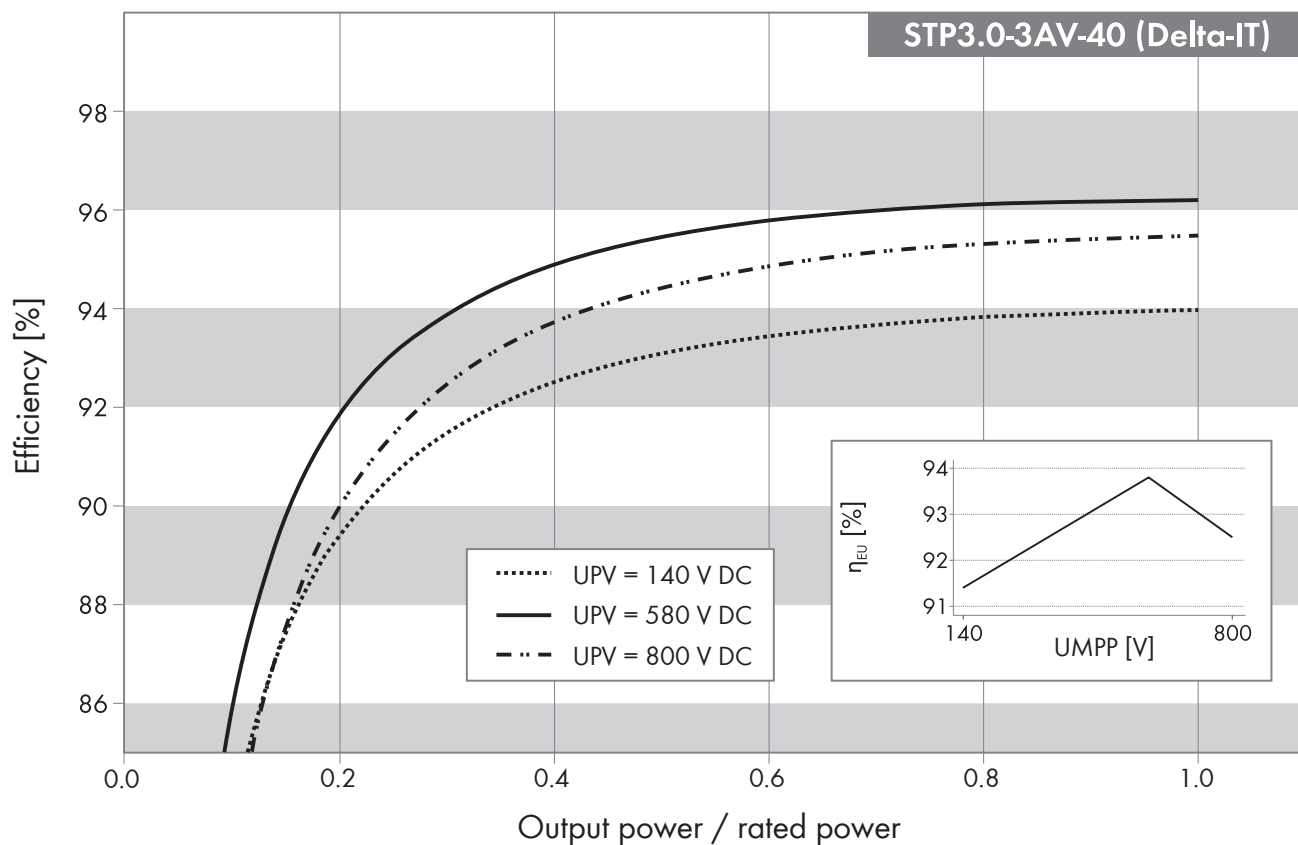


Maximum efficiency, η_{max} 96.2 %

European weighted efficiency, η_{EU} 93.8 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 140 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	73.8 %	75.9 %	71.7 %
10 %	83.6 %	85.9 %	83.0 %
20 %	89.4 %	91.8 %	90.0 %
25 %	90.7 %	93.0 %	91.5 %
30 %	91.5 %	93.9 %	92.5 %
50 %	93.1 %	95.5 %	94.4 %
75 %	93.8 %	96.1 %	95.2 %
100 %	94.0 %	96.2 %	95.5 %

7.8.3 Derating Behavior

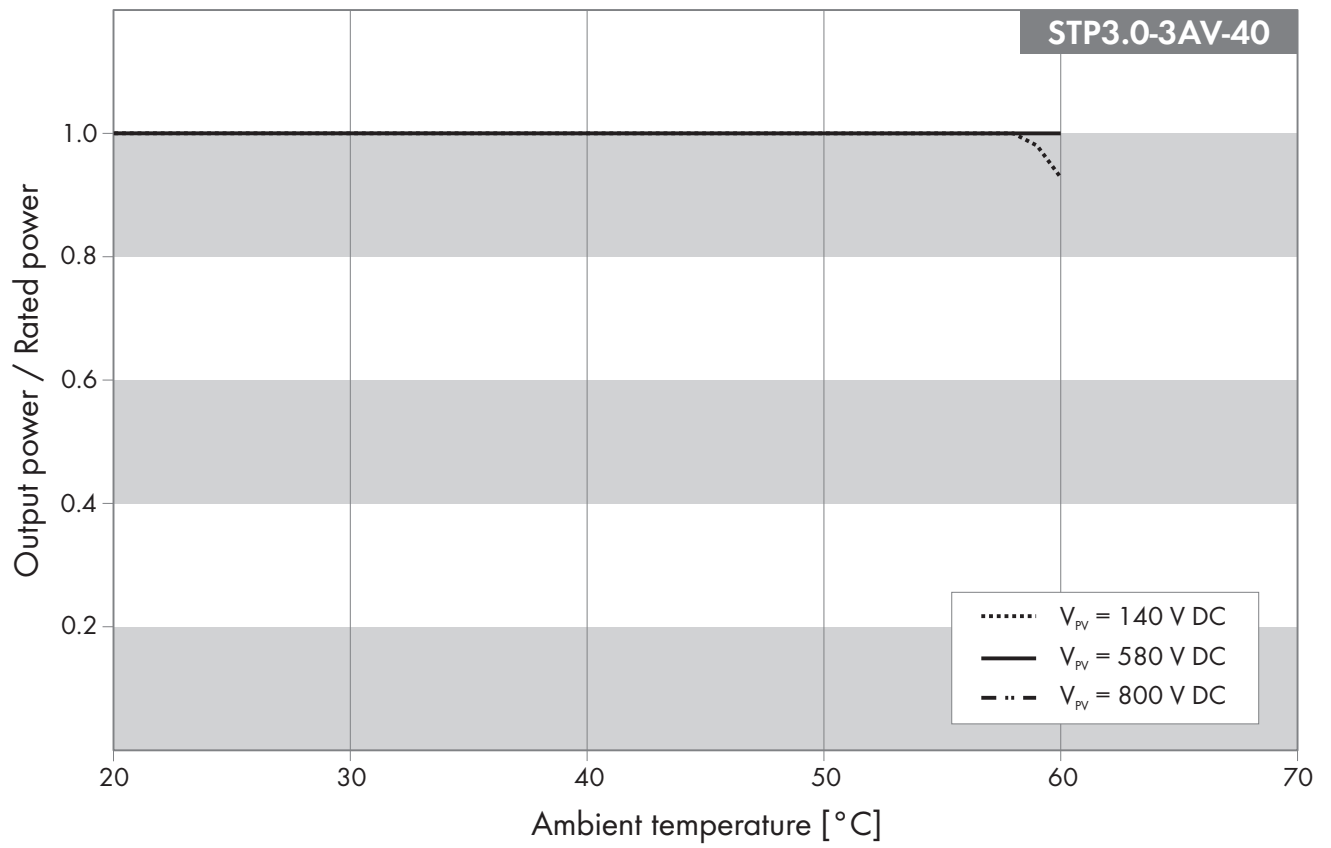

7.9 STP4.0-3AV-40

7.9.1 Efficiency when operating in TN or TT systems

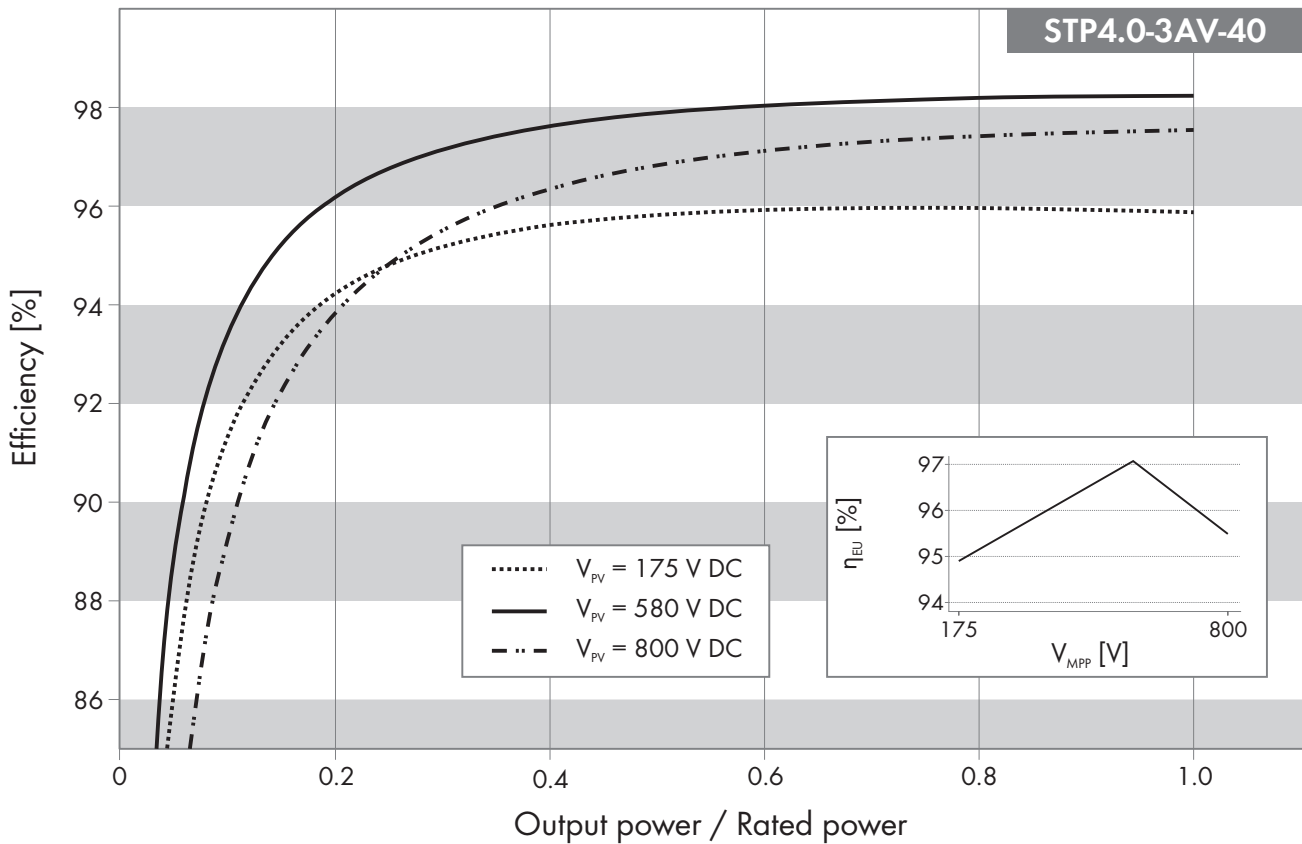

Maximum efficiency, η_{\max}

98.2%


European weighted efficiency, η_{EU}

97.1%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	85.9%	88.6%	81.6%
10%	91.2%	93.3%	98.1%
20%	94.2%	96.1%	93.8%
25%	94.8%	96.7%	94.8%
30%	95.2%	97.1%	95.5%
50%	95.8%	97.9%	96.8%
75%	96.0%	98.2%	97.4%
100%	95.9%	98.2%	97.6%

7.9.2 Efficiency when operating in a Delta IT system

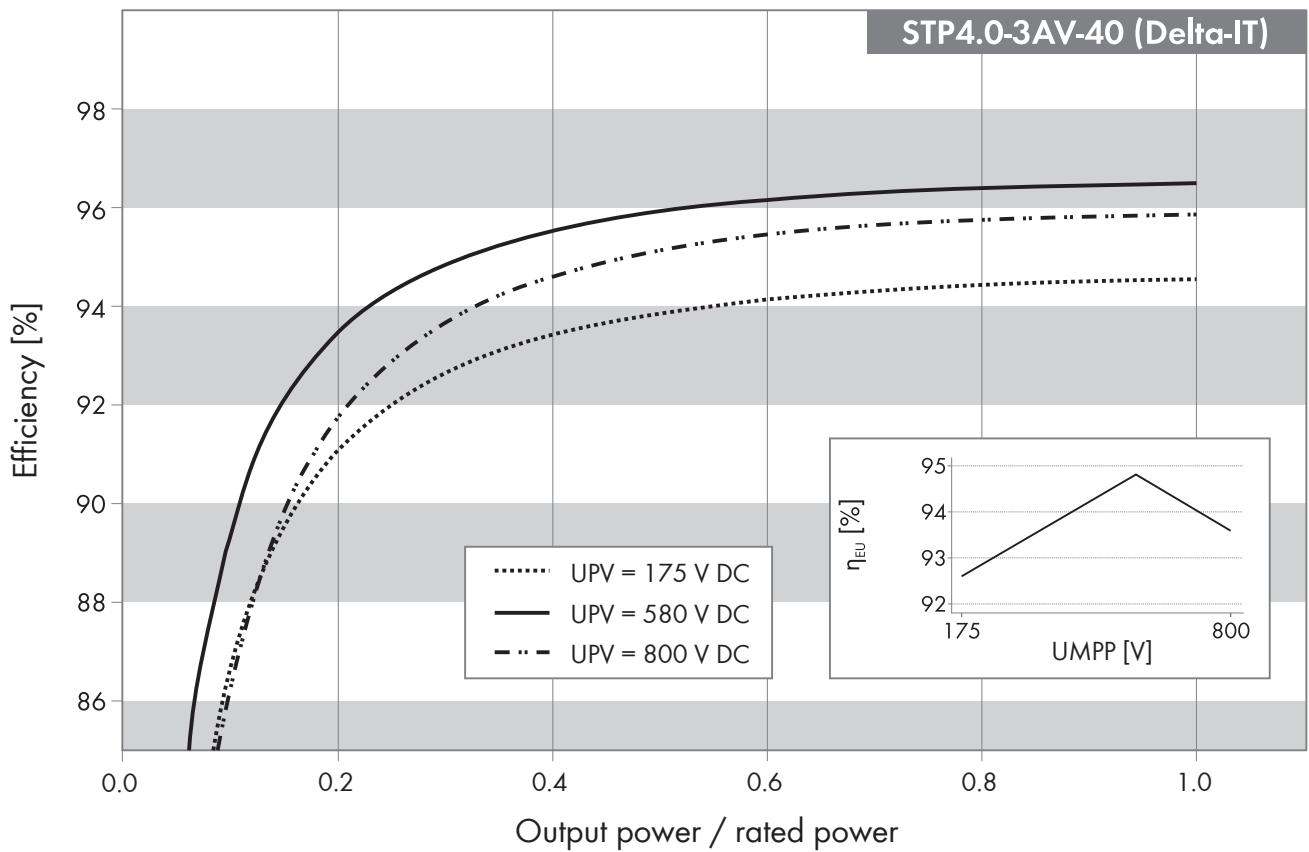


Maximum efficiency, η_{max} 96.5 %

European weighted efficiency, η_{EU} 94.8 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 175 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	78.7 %	82.1 %	76.7 %
10 %	86.6 %	89.4 %	86.2 %
20 %	91.1 %	93.5 %	91.7 %
25 %	92.0 %	94.3 %	92.9 %
30 %	92.6 %	94.9 %	93.7 %
50 %	93.9 %	95.9 %	95.1 %
75 %	94.4 %	96.4 %	95.7 %
100 %	94.6 %	96.5 %	95.9 %

7.9.3 Derating Behavior

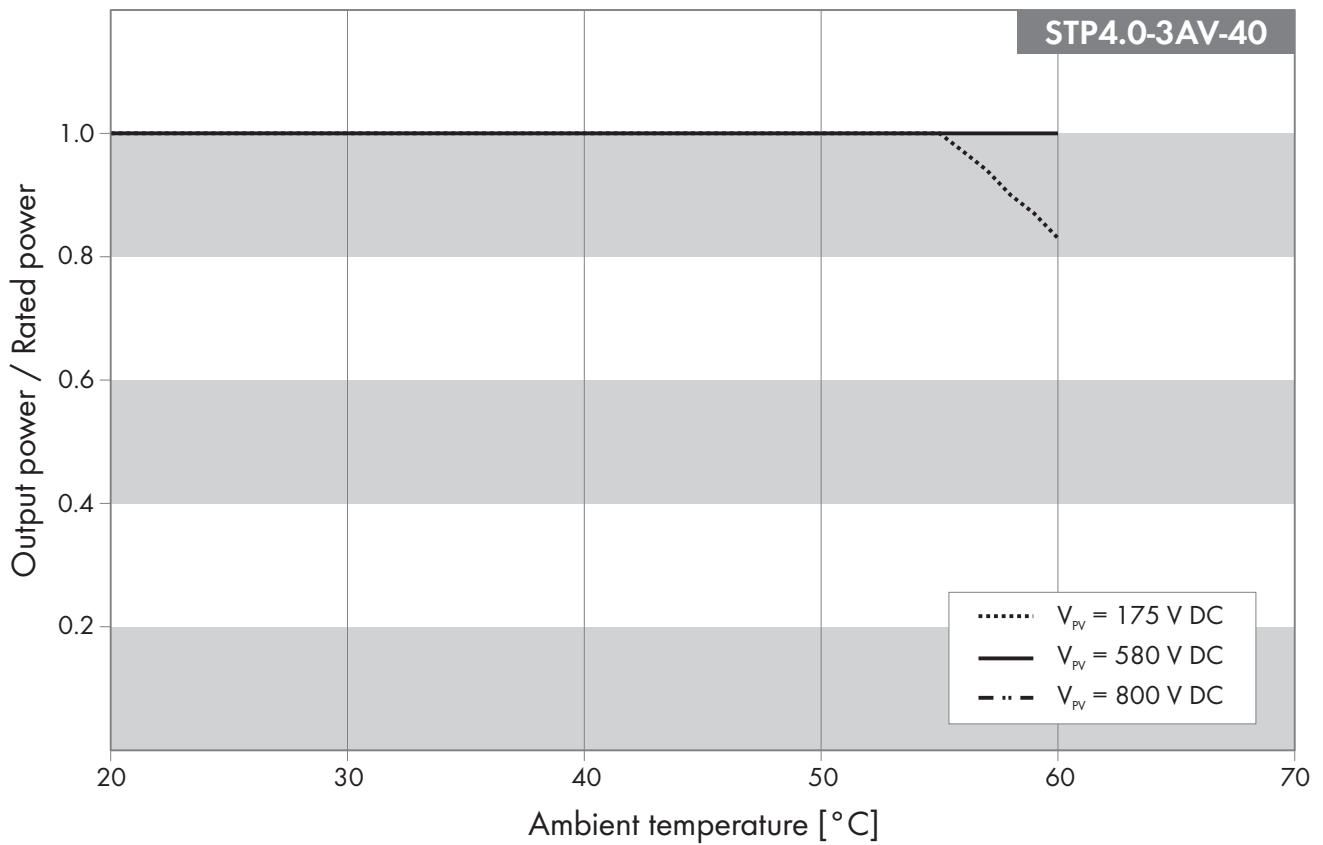

7.10 STP5.0-3AV-40

7.10.1 Efficiency when operating in TN or TT systems

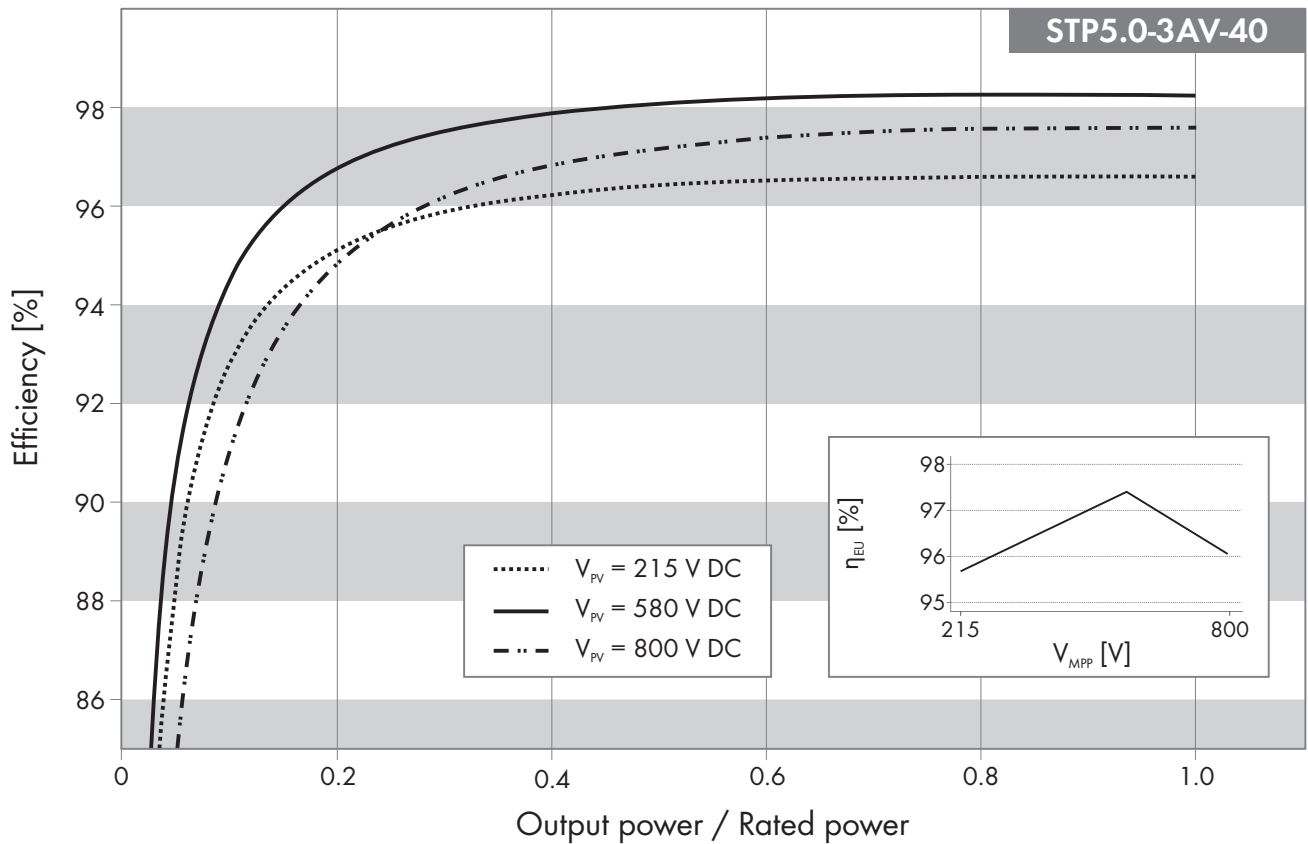


Maximum efficiency, η_{max} 98.2%

European weighted efficiency, η_{EU} 97.4%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage	Rated input voltage	Maximum MPP voltage
	215 V	580 V	800 V
5%	88.2%	90.4%	84.4%
10%	92.7%	94.4%	90.9%
20%	95.1%	96.7%	94.8%
25%	95.6%	97.2%	95.6%
30%	95.9%	97.5%	96.2%
50%	96.4%	98.1%	97.2%
75%	96.6%	98.2%	97.5%
100%	96.6%	98.2%	97.6%

7.10.2 Efficiency when operating in a Delta IT system

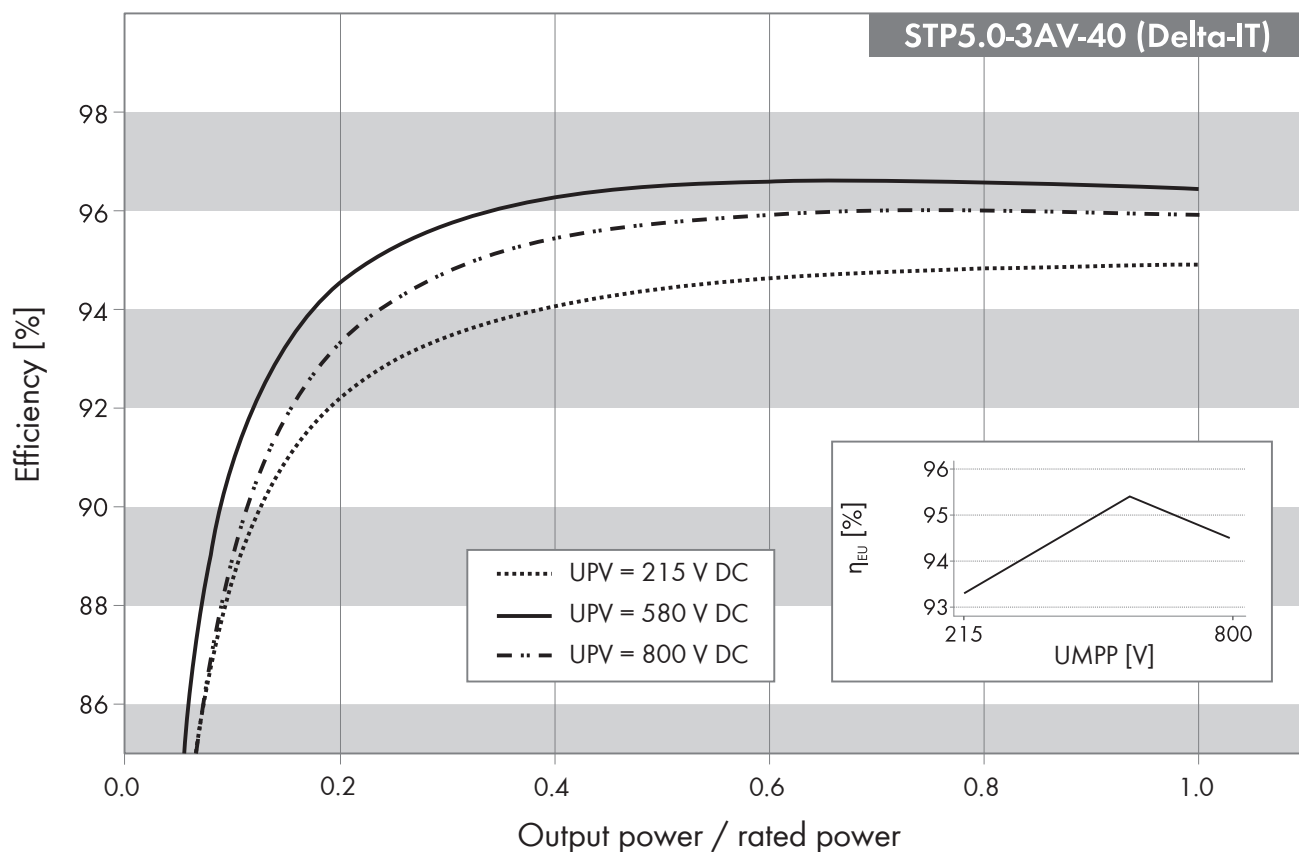Maximum efficiency, η_{\max}

96.6 %


European weighted efficiency, η_{EU}

95.4 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 215 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	81.7 %	83.9 %	81.0 %
10 %	88.4 %	90.8 %	88.9 %
20 %	92.2 %	94.5 %	93.3 %
25 %	92.9 %	95.3 %	94.2 %
30 %	93.4 %	95.7 %	94.8 %
50 %	94.4 %	96.5 %	95.8 %
75 %	94.8 %	96.6 %	96.0 %
100 %	94.9 %	96.4 %	95.9 %

7.10.3 Derating Behavior

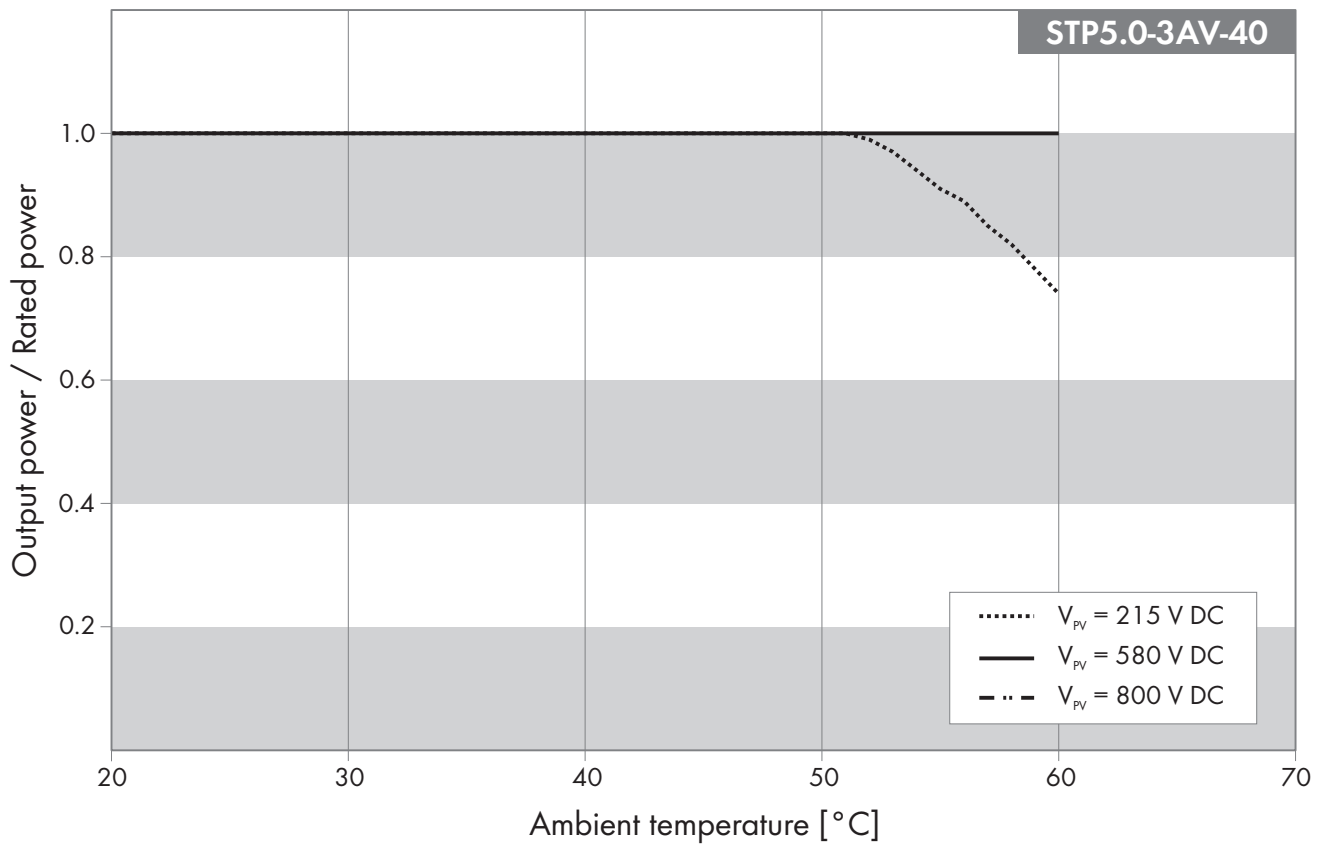

7.11 STP6.0-3AV-40

7.11.1 Efficiency when operating in TN or TT systems

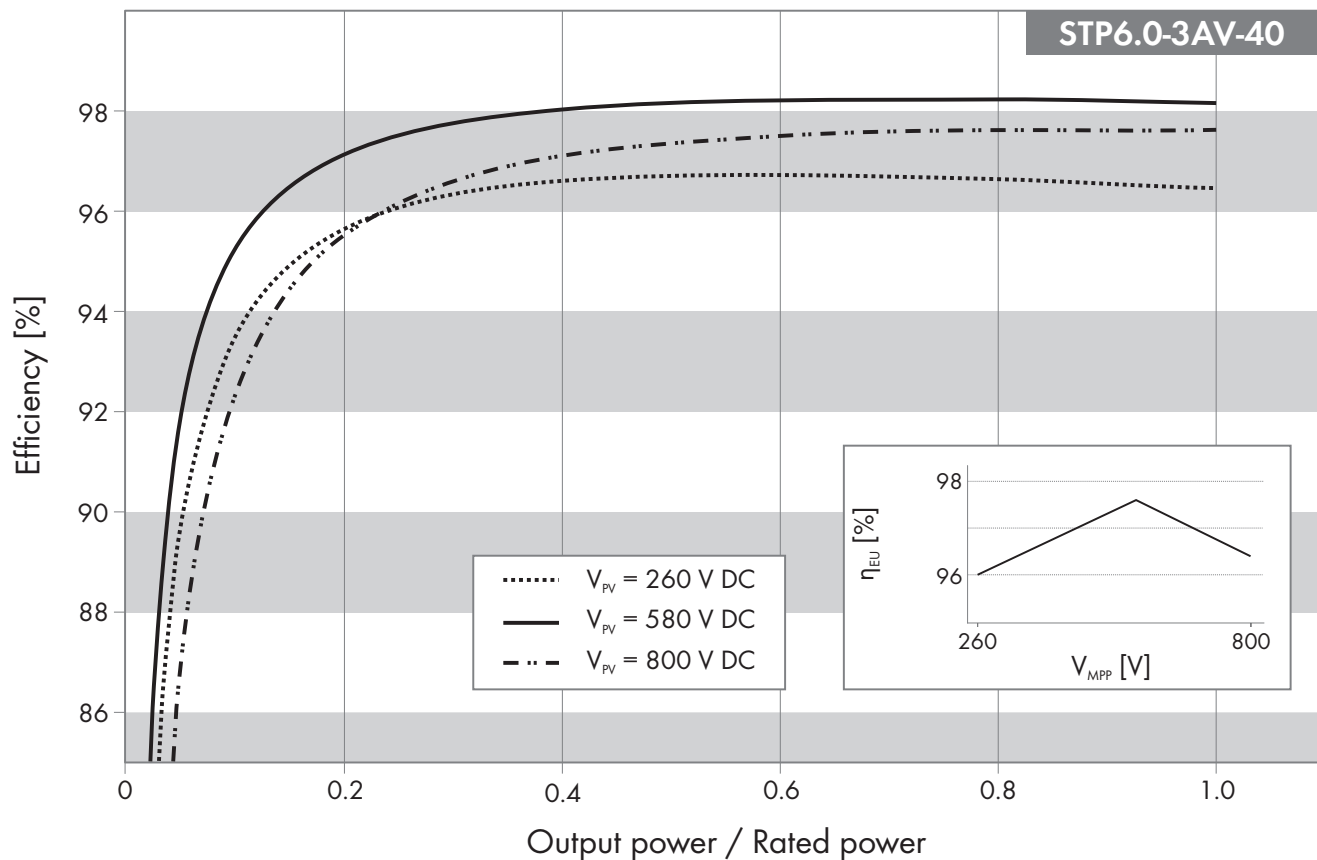

Maximum efficiency, η_{\max}

98.2%


European weighted efficiency, η_{EU}

97.6%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	89.3%	91.6%	86.4%
10%	93.4%	95.2%	92.2%
20%	95.6%	97.1%	95.5%
25%	96.1%	97.5%	96.1%
30%	96.3%	97.8%	96.6%
50%	96.7%	98.2%	97.4%
75%	96.7%	98.2%	97.6%
100%	96.5%	98.2%	97.6%

7.11.2 Efficiency when operating in a Delta IT system

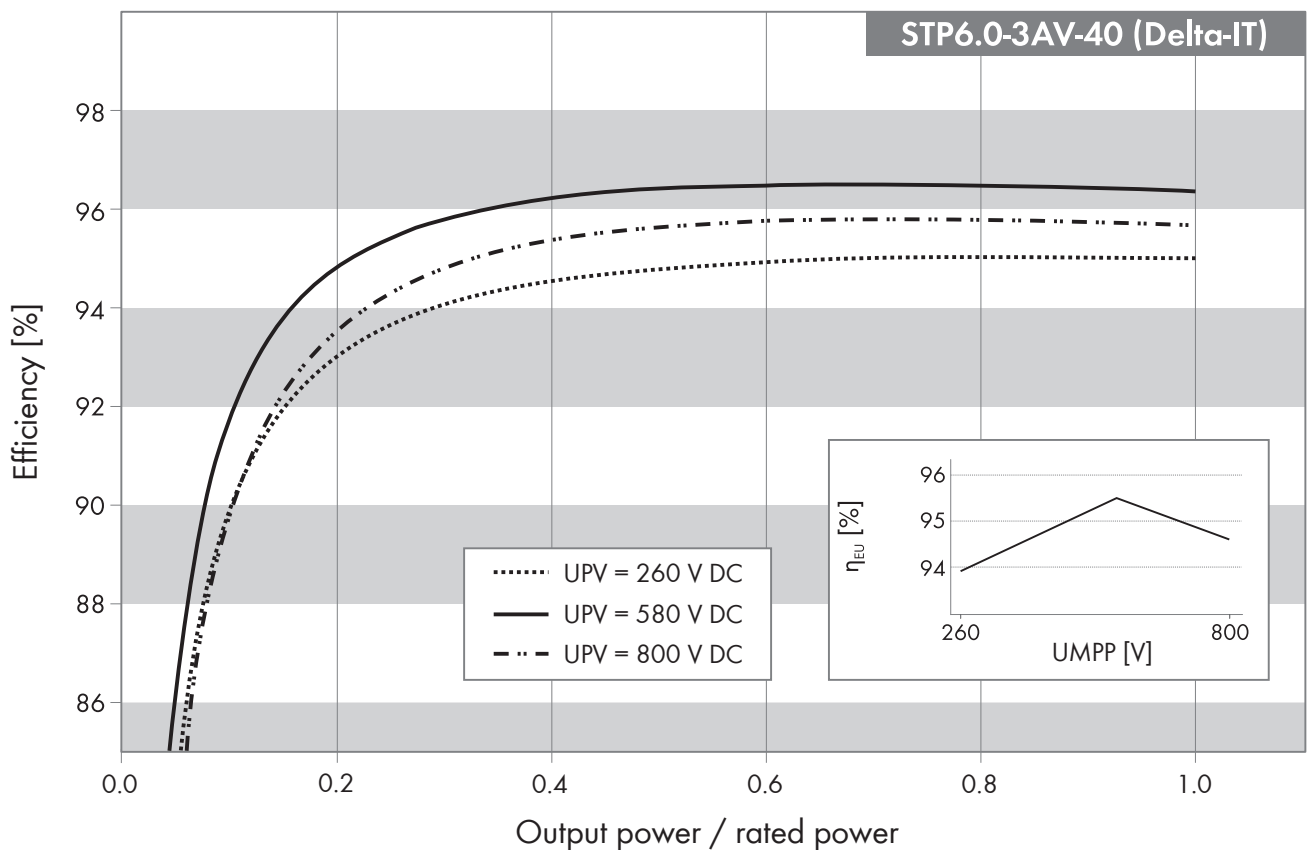


Maximum efficiency, η_{max} 96.5 %

European weighted efficiency, η_{EU} 95.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	83.9 %	86.0 %	82.7 %
10 %	89.8 %	91.7 %	89.7 %
20 %	93.0 %	94.8 %	93.6 %
25 %	93.7 %	95.4 %	94.3 %
30 %	94.1 %	95.8 %	94.8 %
50 %	94.8 %	96.4 %	95.6 %
75 %	95.0 %	96.5 %	95.8 %
100 %	95.0 %	96.3 %	95.7 %

7.11.3 Derating Behavior

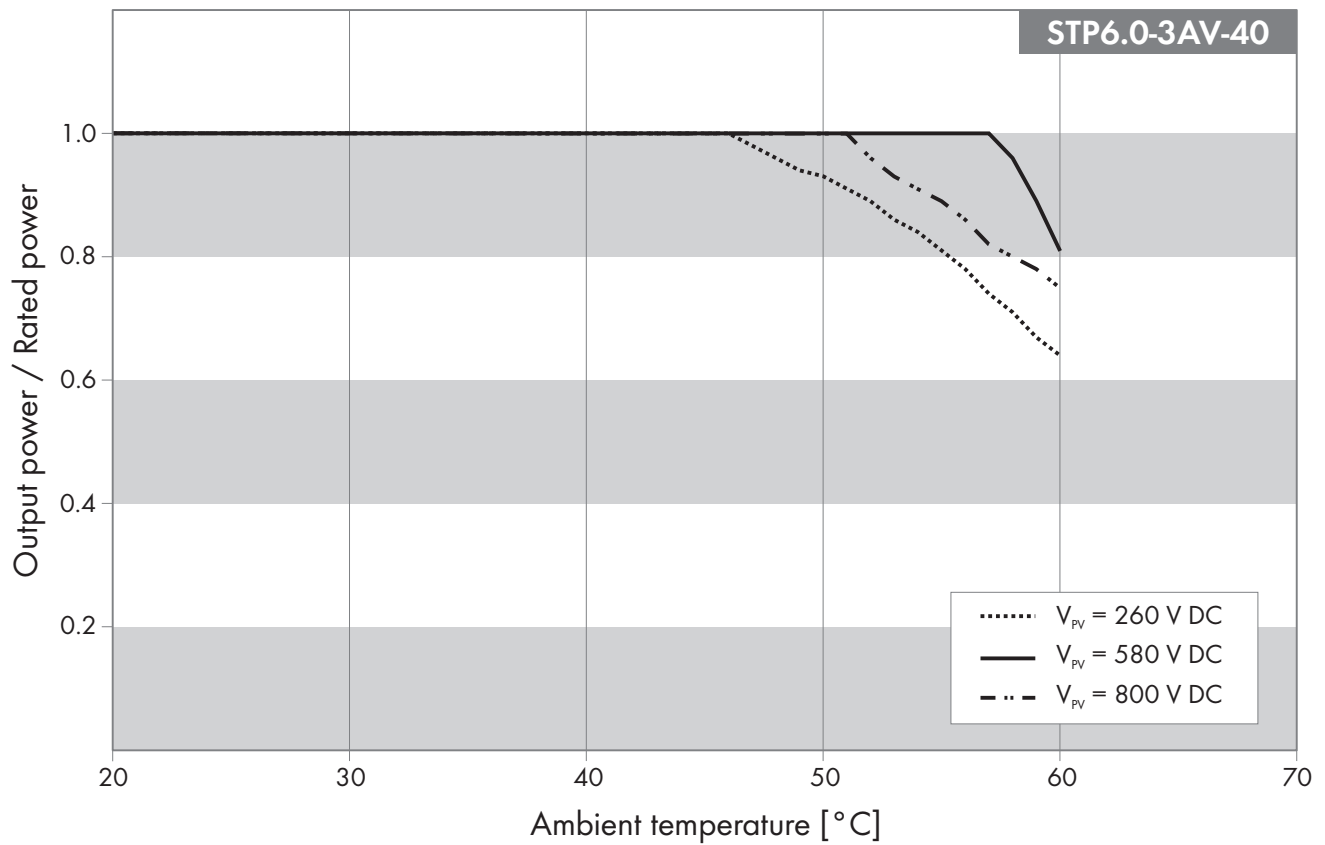

7.12 STP8.0-3AV-40

7.12.1 Efficiency when operating in TN or TT systems

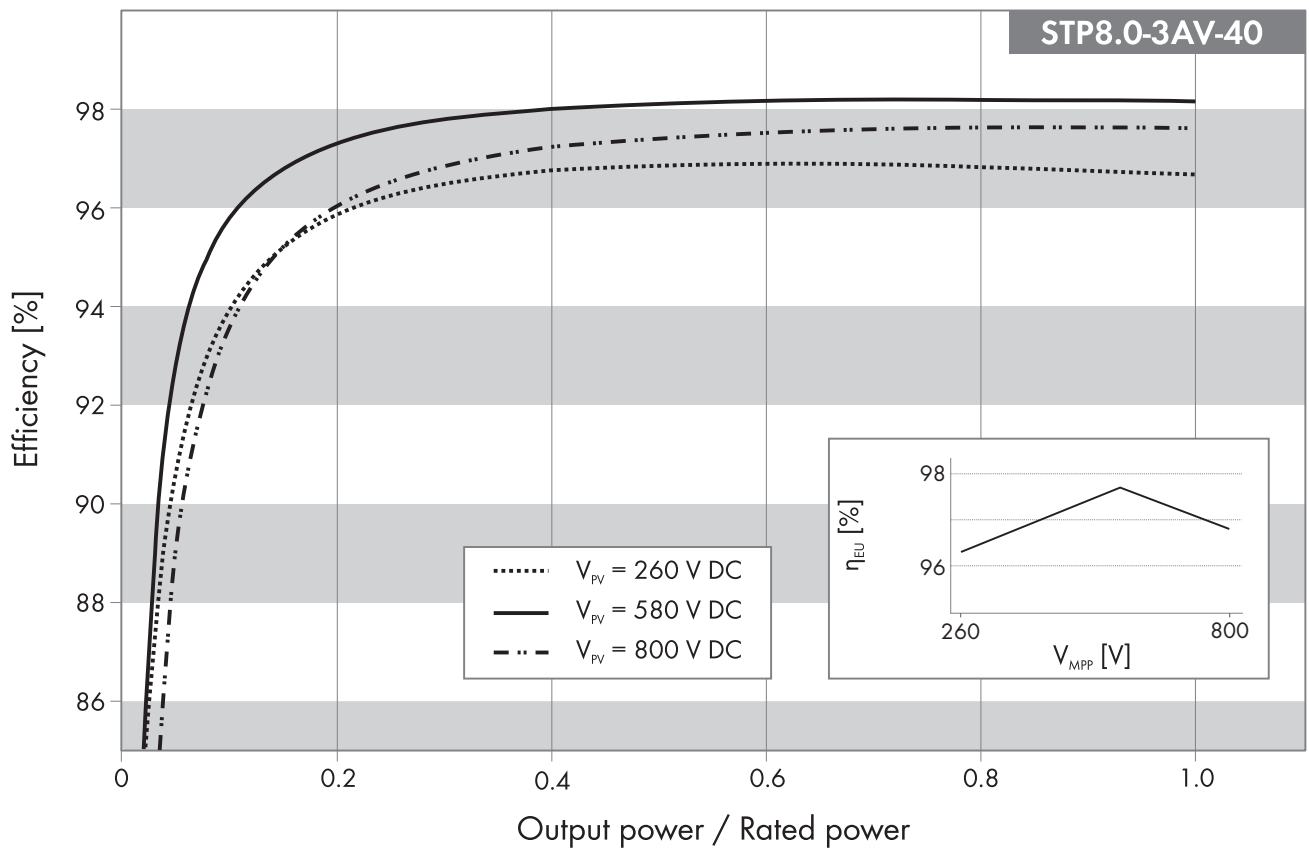


Maximum efficiency, η_{\max} 98.3%

European weighted efficiency, η_{EU} 97.7%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	90.6%	92.7%	88.8%
10%	93.9%	95.8%	93.6%
20%	95.9%	97.4%	96.1%
25%	96.3%	97.7%	96.6%
30%	96.6%	97.9%	96.9%
50%	96.9%	98.2%	97.5%
75%	96.9%	98.3%	97.7%
100%	96.7%	98.2%	97.7%

7.12.2 Efficiency when operating in a Delta IT system

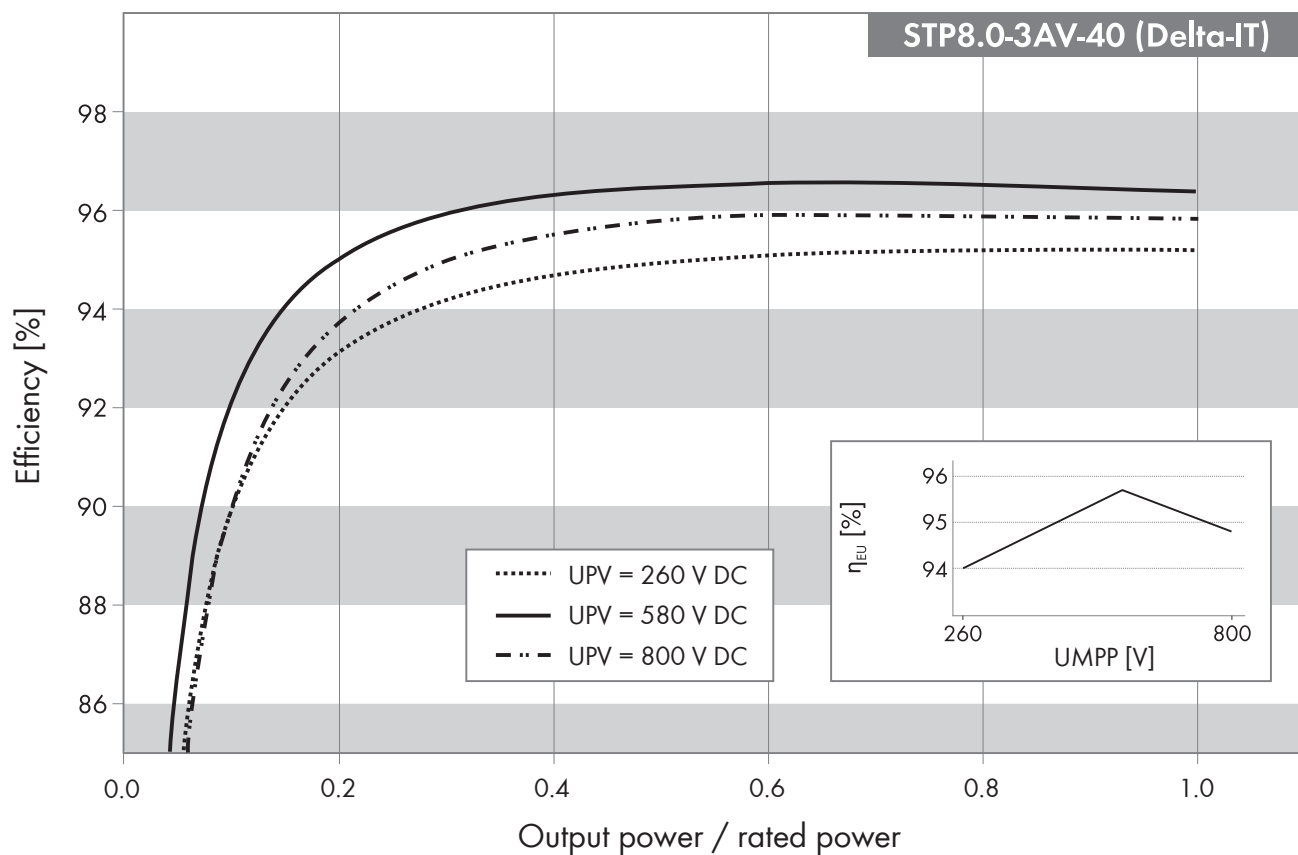


Maximum efficiency, η_{max} 96.6 %

European weighted efficiency, η_{EU} 95.7 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 260 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	83.9 %	86.6 %	82.9 %
10 %	89.9 %	92.1 %	89.9 %
20 %	93.1 %	95.1 %	93.8 %
25 %	93.8 %	95.6 %	94.5 %
30 %	94.2 %	96.0 %	95.0 %
50 %	95.0 %	96.5 %	95.8 %
75 %	95.2 %	96.6 %	96.0 %
100 %	95.2 %	96.4 %	95.9 %

7.12.3 Derating Behavior

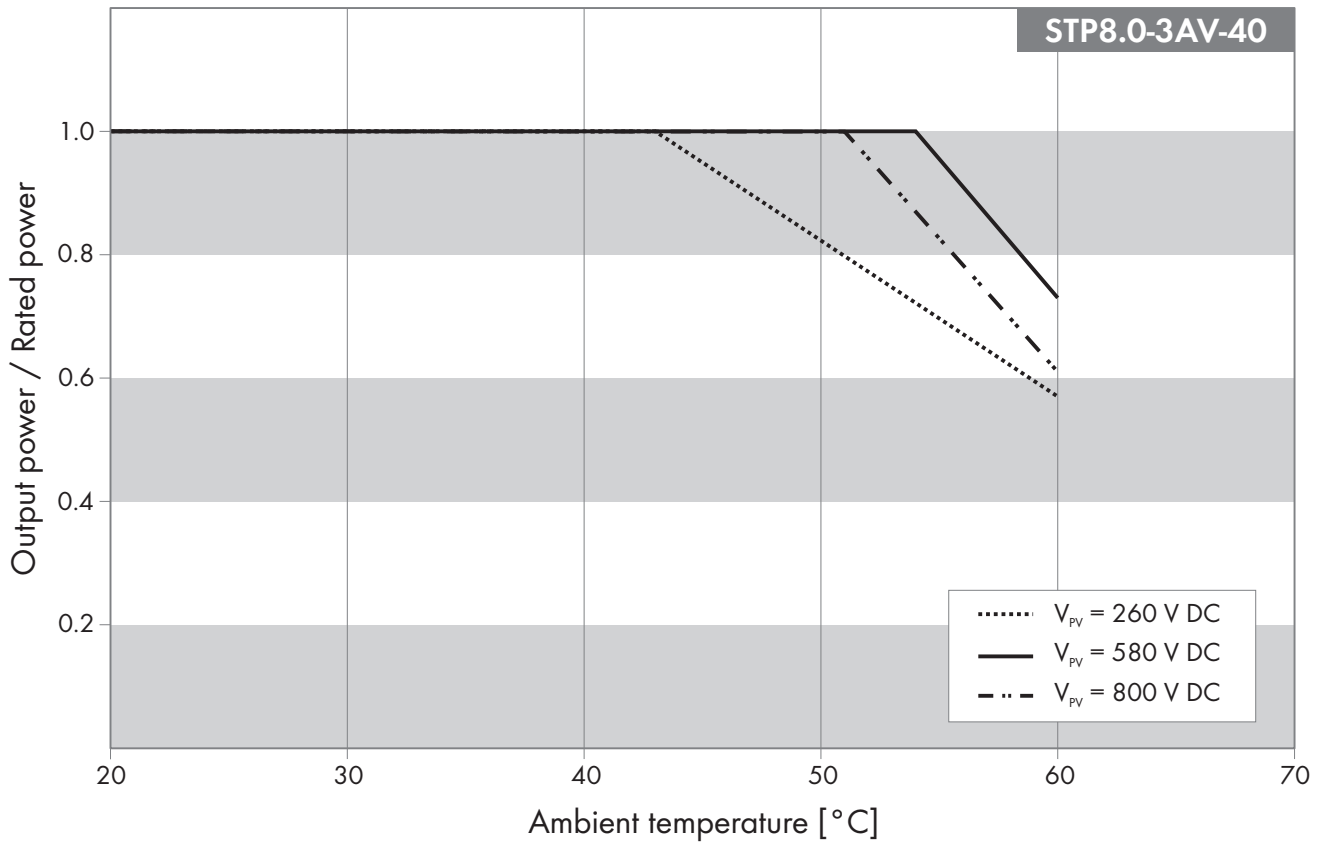

7.13 STP10.0-3AV-40

7.13.1 Efficiency when operating in TN or TT systems

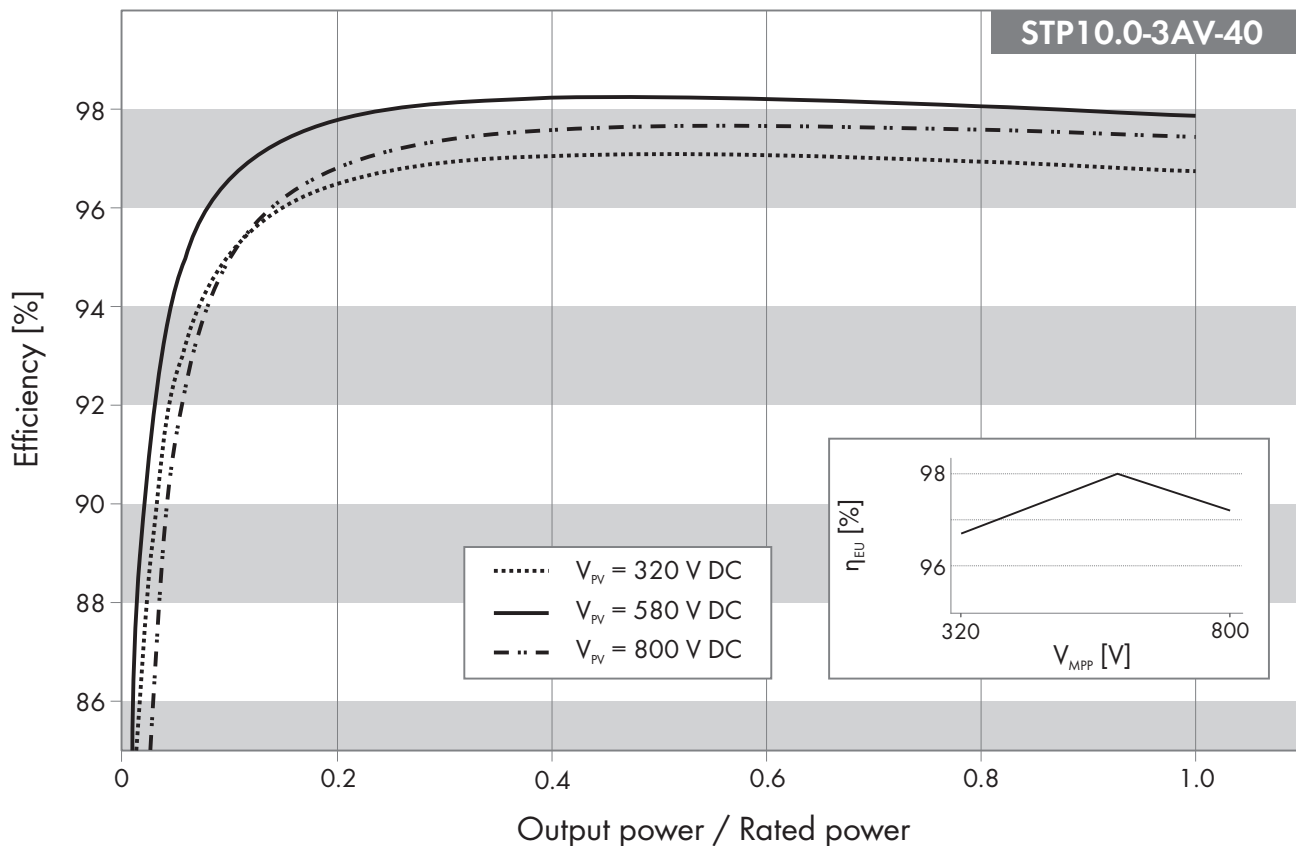

Maximum efficiency, η_{max}

98.3%


European weighted efficiency, η_{EU}

98.0%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 320 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5%	92.5%	94.4%	91.3%
10%	95.1%	96.6%	95.0%
20%	96.5%	97.8%	96.9%
25%	96.8%	98.1%	97.2%
30%	97.0%	98.2%	97.4%
50%	97.2%	98.3%	97.7%
75%	97.0%	98.2%	97.7%
100%	96.8%	97.9%	97.5%

7.13.2 Efficiency when operating in a Delta IT system

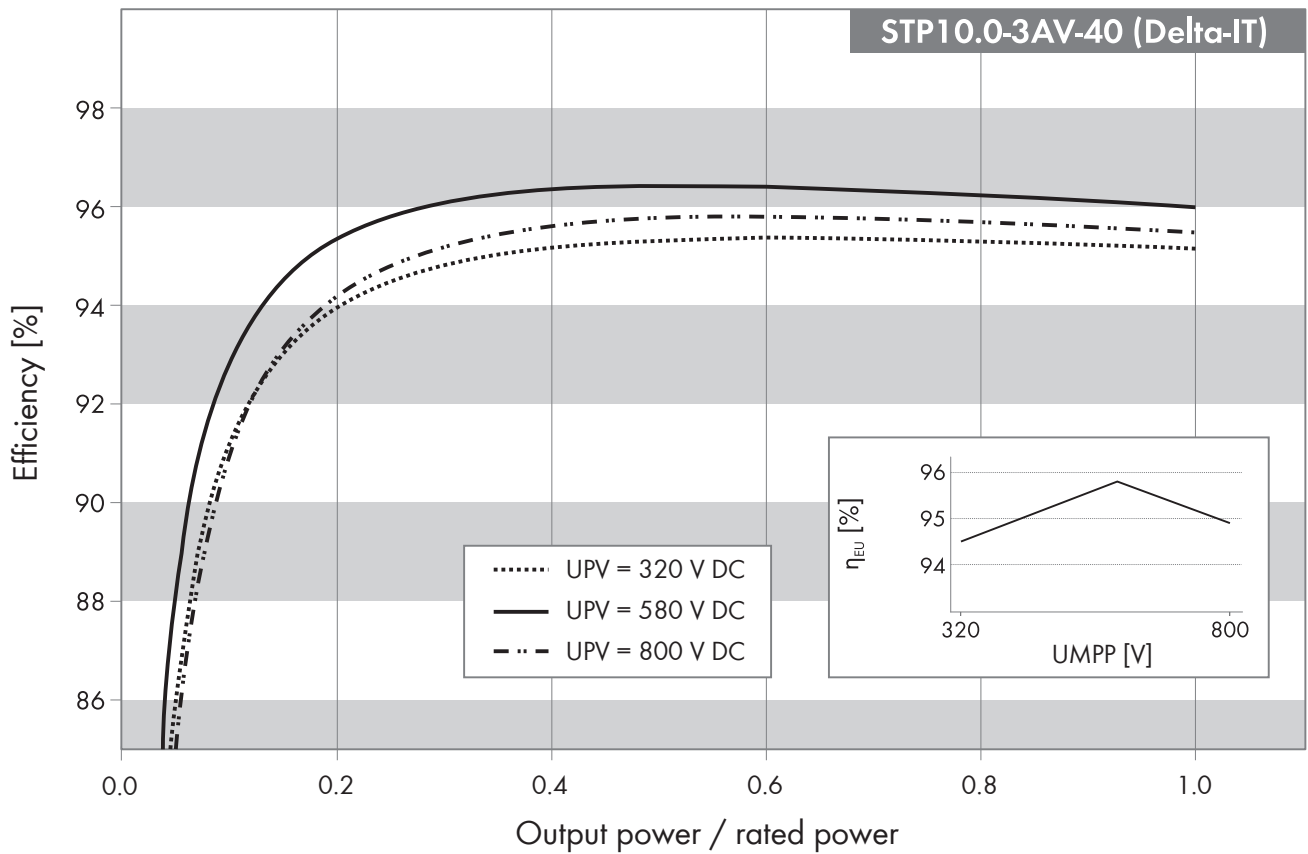


Maximum efficiency, η_{max}	95.8 %
European weighted efficiency, η_{EU}	96.5 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 320 V	Rated input voltage 580 V	Maximum MPP voltage 800 V
5 %	85.9 %	88.0 %	84.8 %
10 %	91.2 %	92.9 %	90.9 %
20 %	94.0 %	95.4 %	94.2 %
25 %	94.5 %	95.9 %	94.9 %
30 %	94.9 %	96.1 %	95.2 %
50 %	95.4 %	96.5 %	95.8 %
75 %	95.4 %	96.4 %	95.8 %
100 %	95.2 %	96.1 %	95.5 %


7.13.3 Derating Behavior

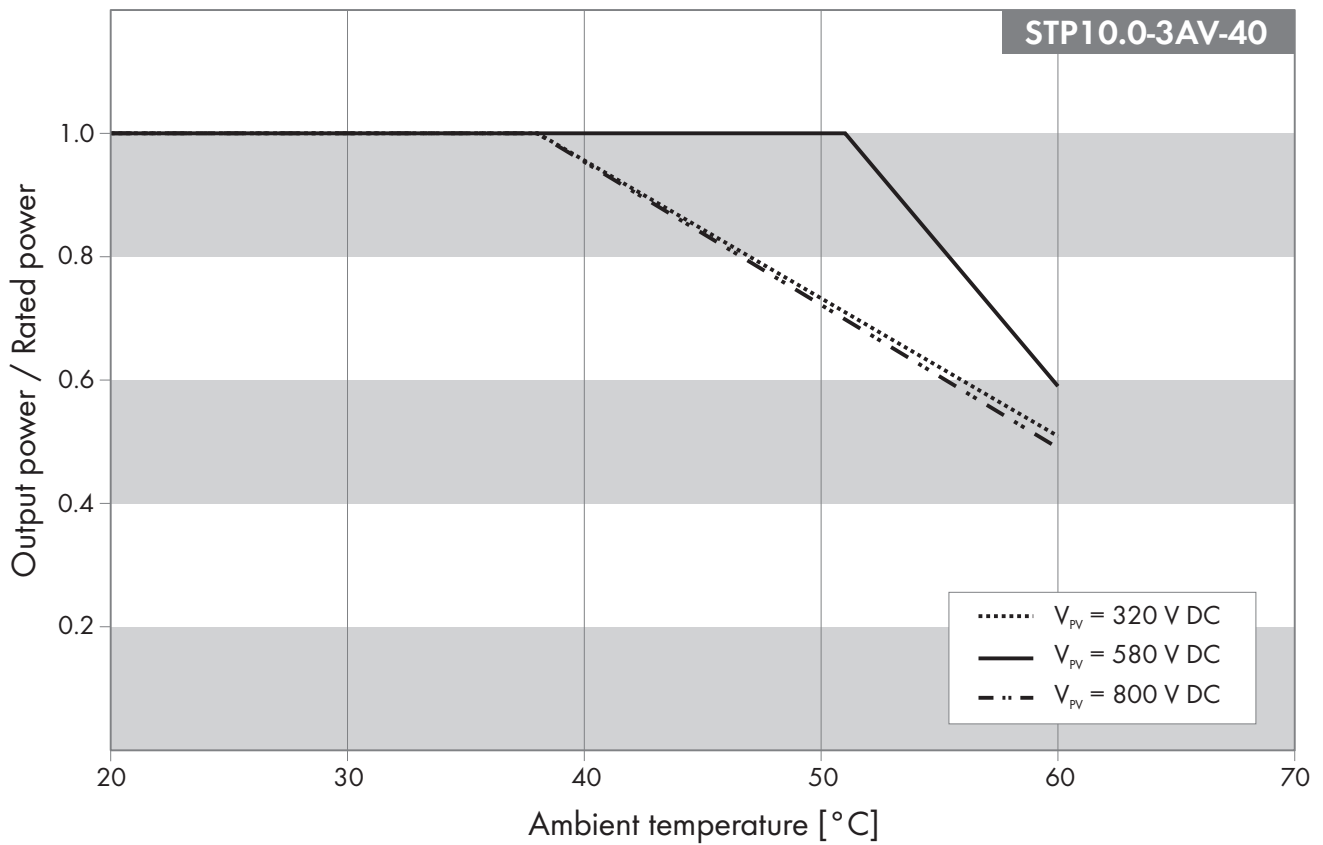

8 Sunny Tripower Storage X

8.1 STPS30-20

8.1.1 Efficiency

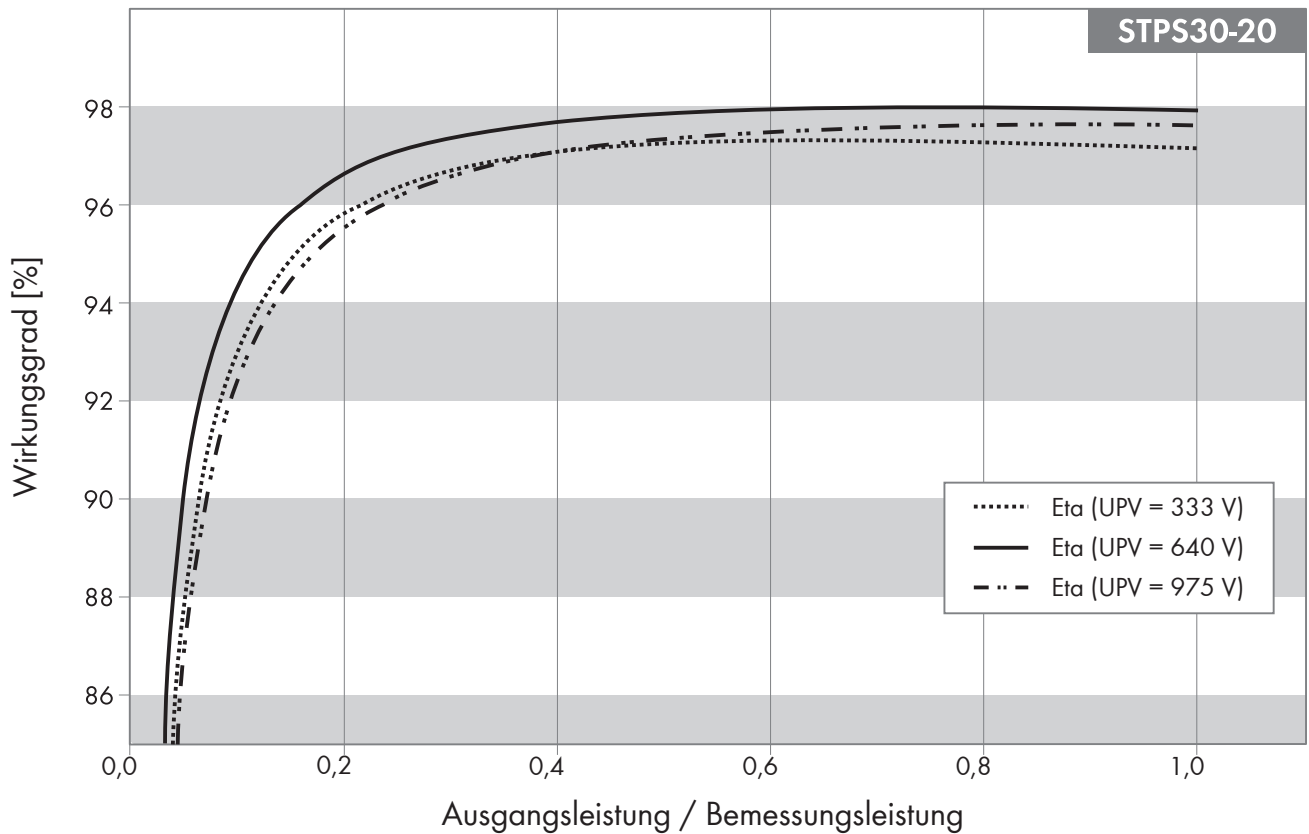

Maximum efficiency, η_{\max} 98%


European weighted efficiency, η_{EU} 97.2%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 640 V	Maximum MPP voltage 975 V
5%	87.6%	89.8%	86.4%
10%	92.9%	94.3%	92.3%
20%	95.8%	96.6%	95.5%
25%	96.4%	97.1%	96.2%
30%	96.7%	97.4%	96.6%
50%	97.3%	97.9%	97.4%


Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 640 V	Maximum MPP voltage 975 V
75%	97.3%	98.0%	97.6%
100%	97.2%	97.9%	97.6%

8.1.2 Derating Behavior

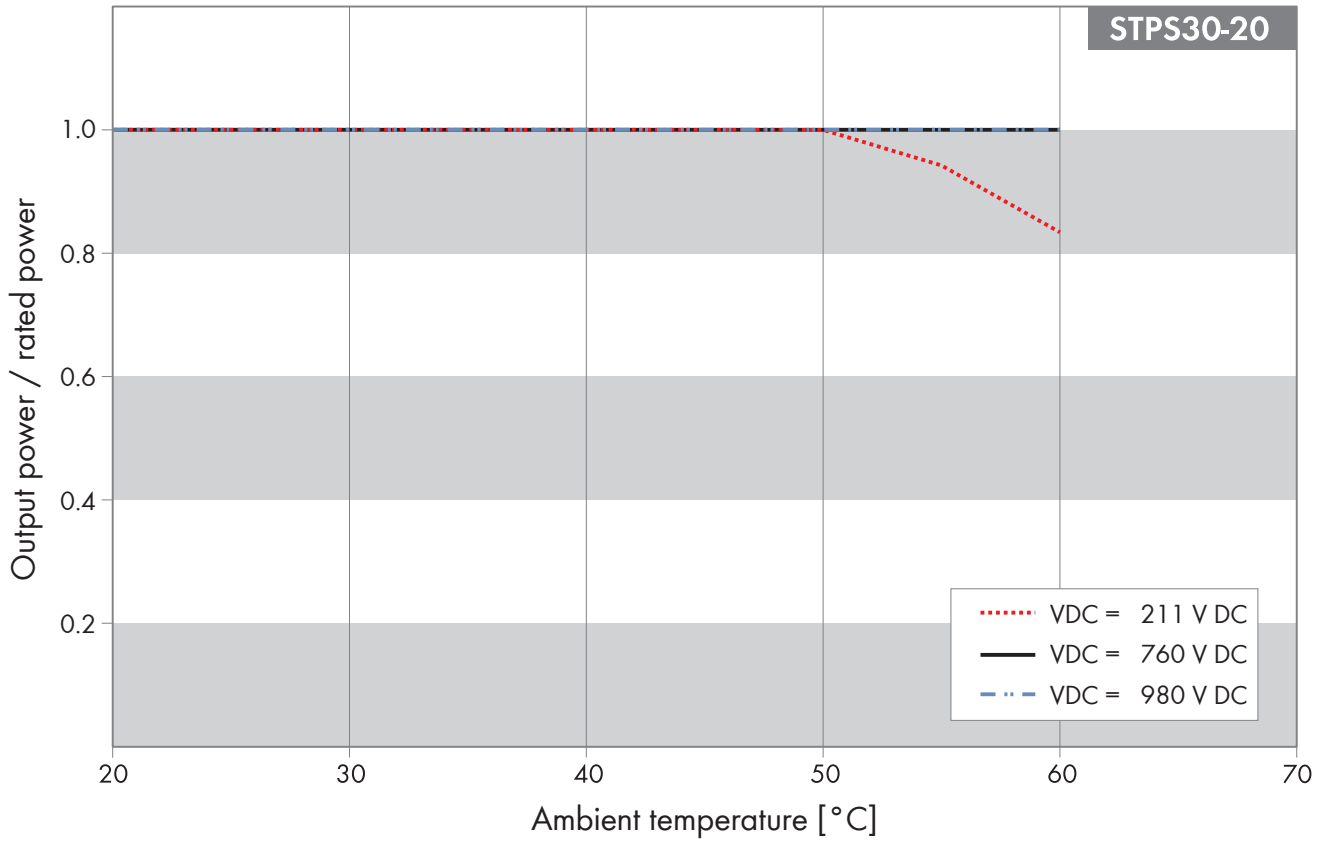

8.2 STPS50-20

8.2.1 Efficiency

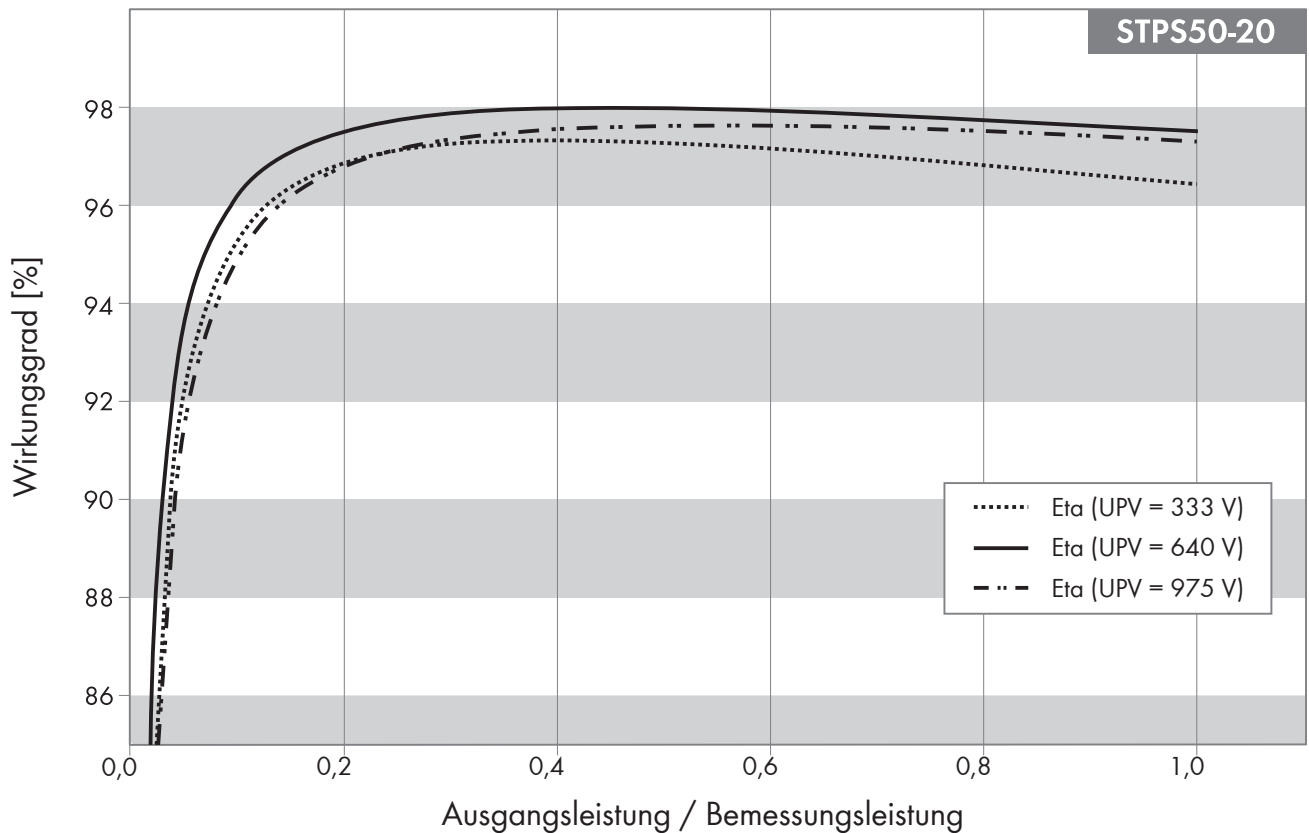


Maximum efficiency, η_{\max} 97.6%

European weighted efficiency, η_{EU} 98.0%

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 333 V	Rated input voltage 640 V	Maximum MPP voltage 975 V
5%	91.8%	93.3%	91.1%
10%	95.2%	96.1%	94.9%
20%	96.9%	97.5%	96.8%
25%	97.1%	97.7%	97.1%
30%	97.3%	97.9%	97.4%
50%	97.3%	98.0%	97.6%
75%	96.9%	97.8%	97.6%
100%	96.4%	97.5%	97.3%


8.2.2 Derating Behavior

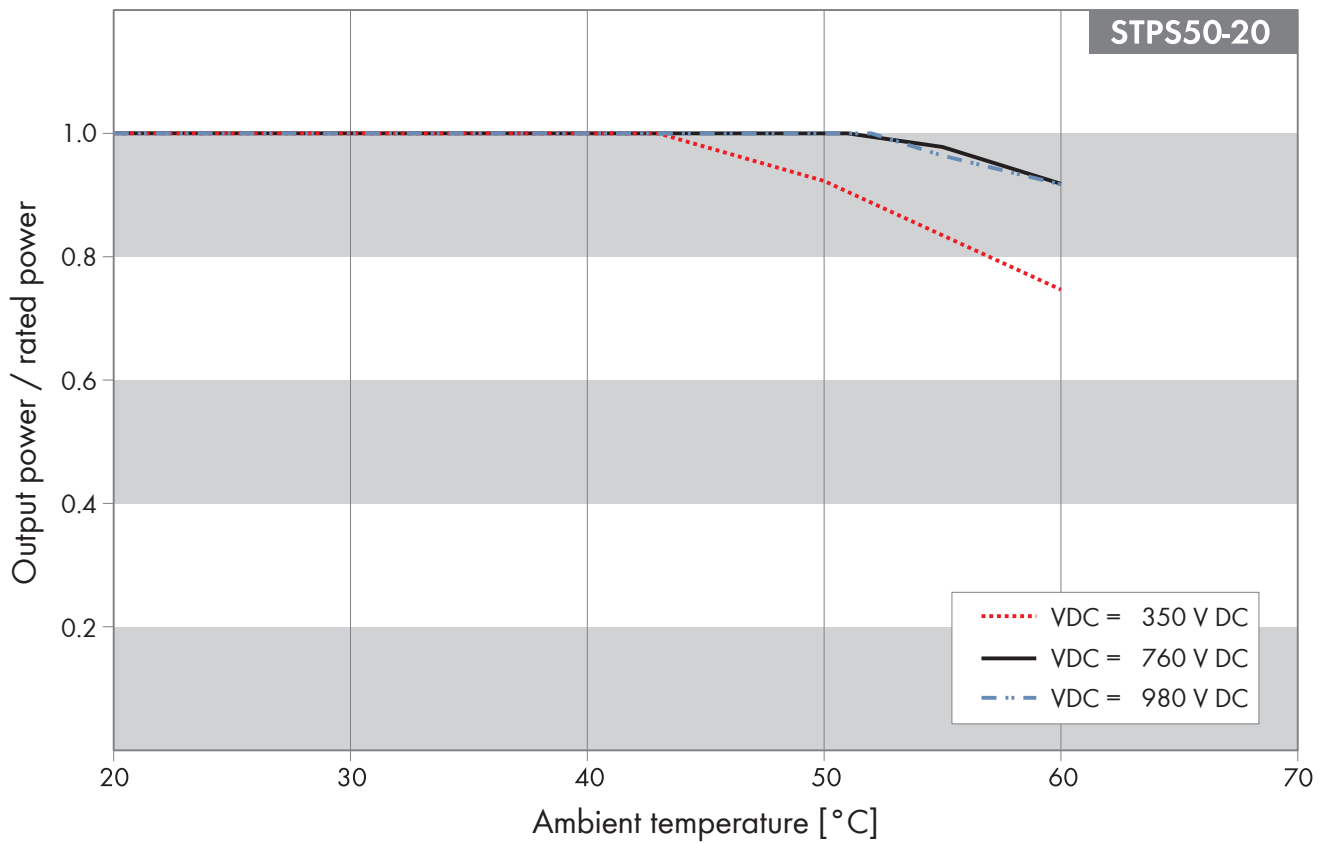

9 Sunny Tripower Smart Energy

9.1 STP5.0-3SE-40

9.1.1 Efficiency

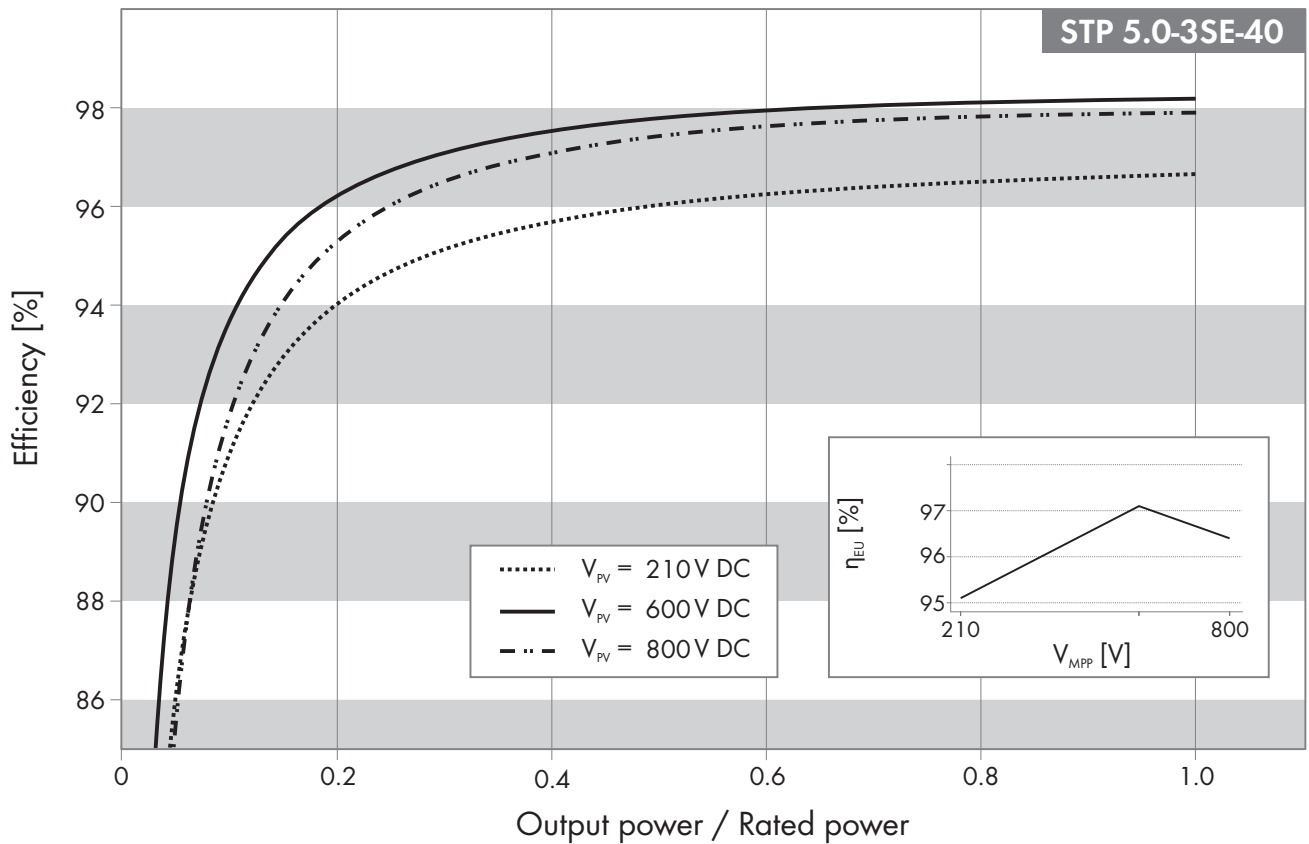

Maximum efficiency, η_{max}

98.2 %


European weighted efficiency, η_{EU}

97.3 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 210 V	Rated input voltage 600 V	Maximum MPP voltage 800 V
5 %	85.7 %	89.2 %	85.2 %
10 %	90.9 %	93.6 %	91.7 %
20 %	94.0 %	96.2 %	95.3 %
25 %	94.7 %	96.7 %	96.0 %
30 %	95.1 %	97.1 %	96.5 %
50 %	96.0 %	97.8 %	97.4 %
75 %	96.4 %	98.1 %	97.8 %
100 %	96.6 %	98.2 %	97.9 %

9.1.2 Derating Behavior

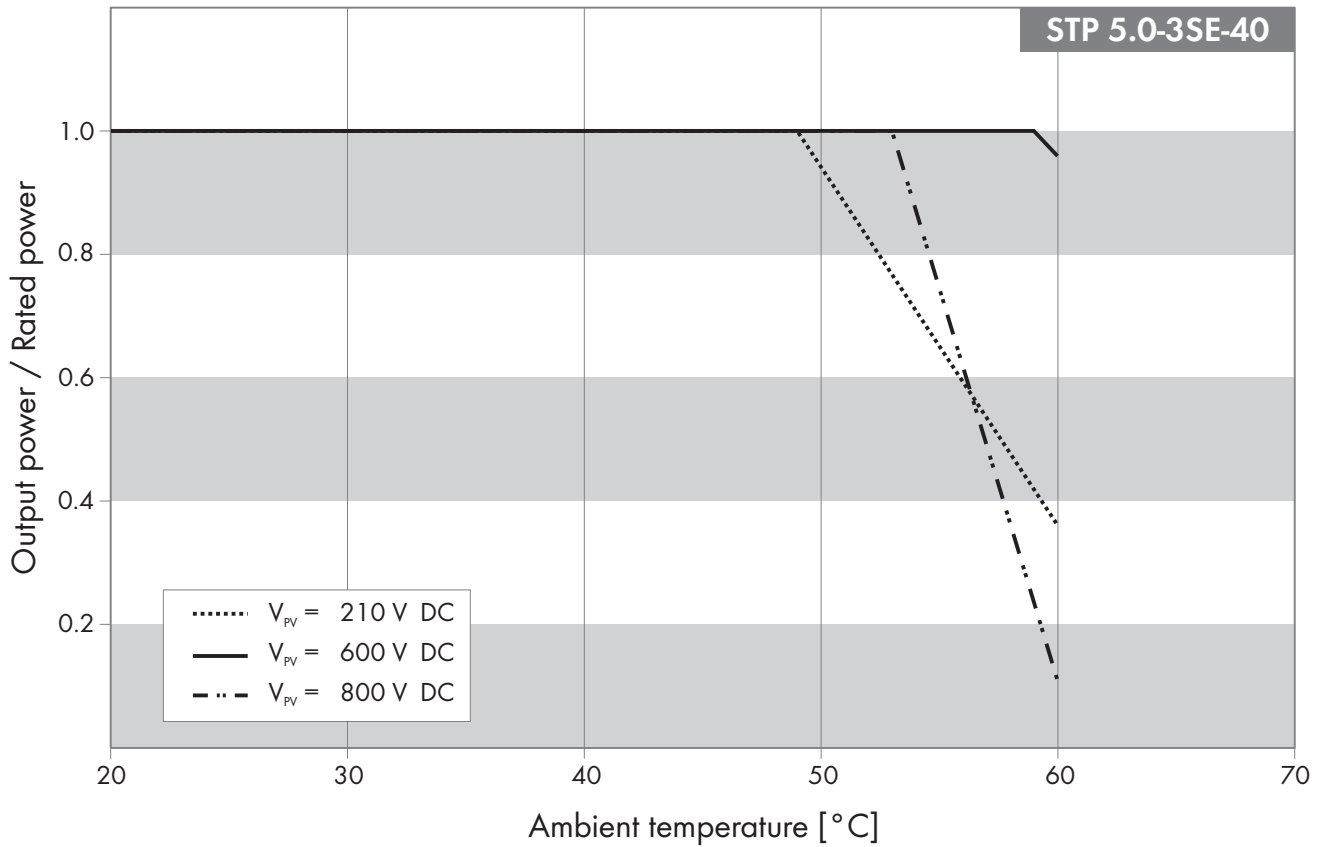

9.2 STP6.0-3SE-40

9.2.1 Efficiency

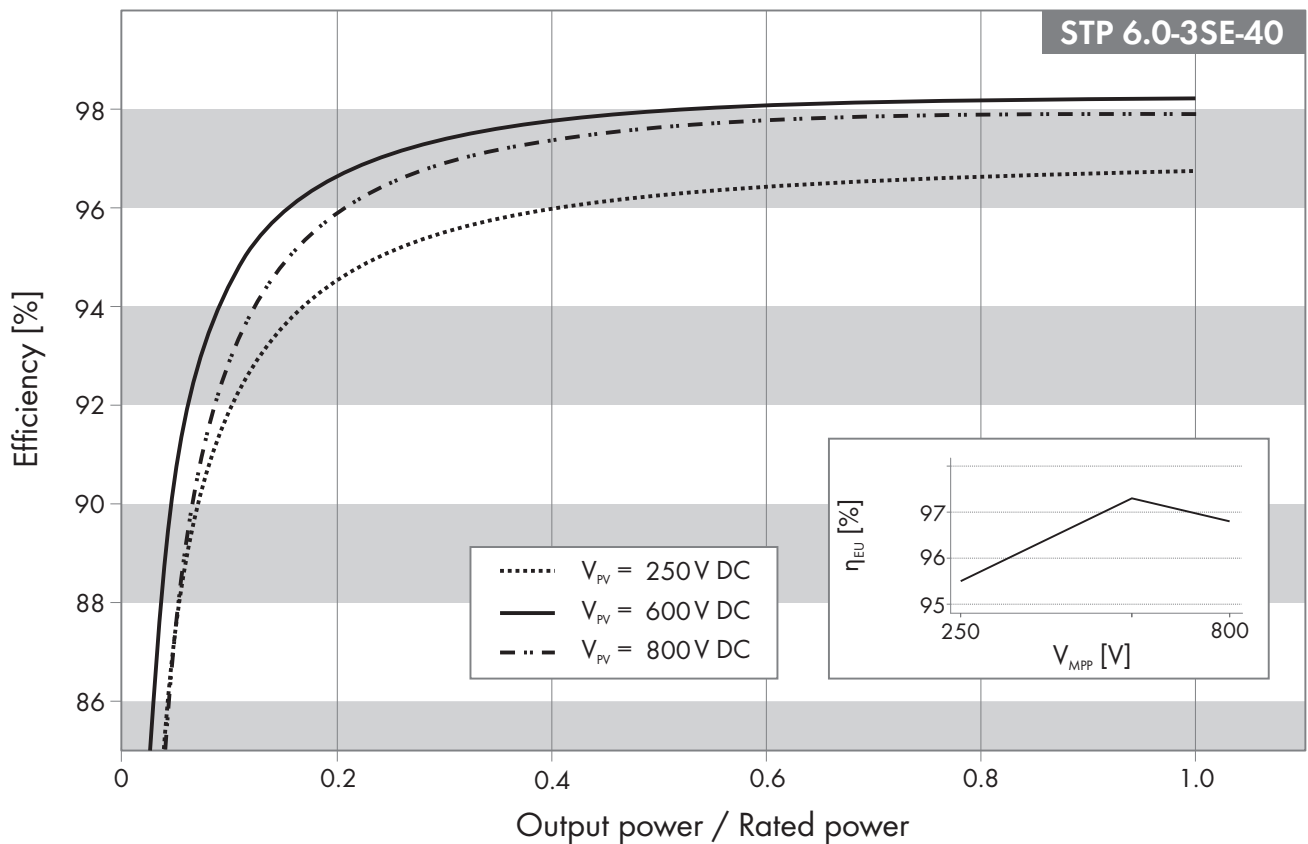


Maximum efficiency, η_{max} 98.2 %

European weighted efficiency, η_{EU} 97.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage	Rated input voltage	Maximum MPP voltage
	250 V	600 V	800 V
5 %	87.3 %	90.6 %	87.2 %
10 %	91.9 %	94.5 %	92.8 %
20 %	94.5 %	96.6 %	95.9 %
25 %	95.1 %	97.1 %	96.5 %
30 %	95.5 %	97.4 %	96.9 %
50 %	96.2 %	97.9 %	97.6 %
75 %	96.6 %	98.2 %	97.9 %
100 %	96.7 %	98.2 %	97.9 %

9.2.2 Derating Behavior

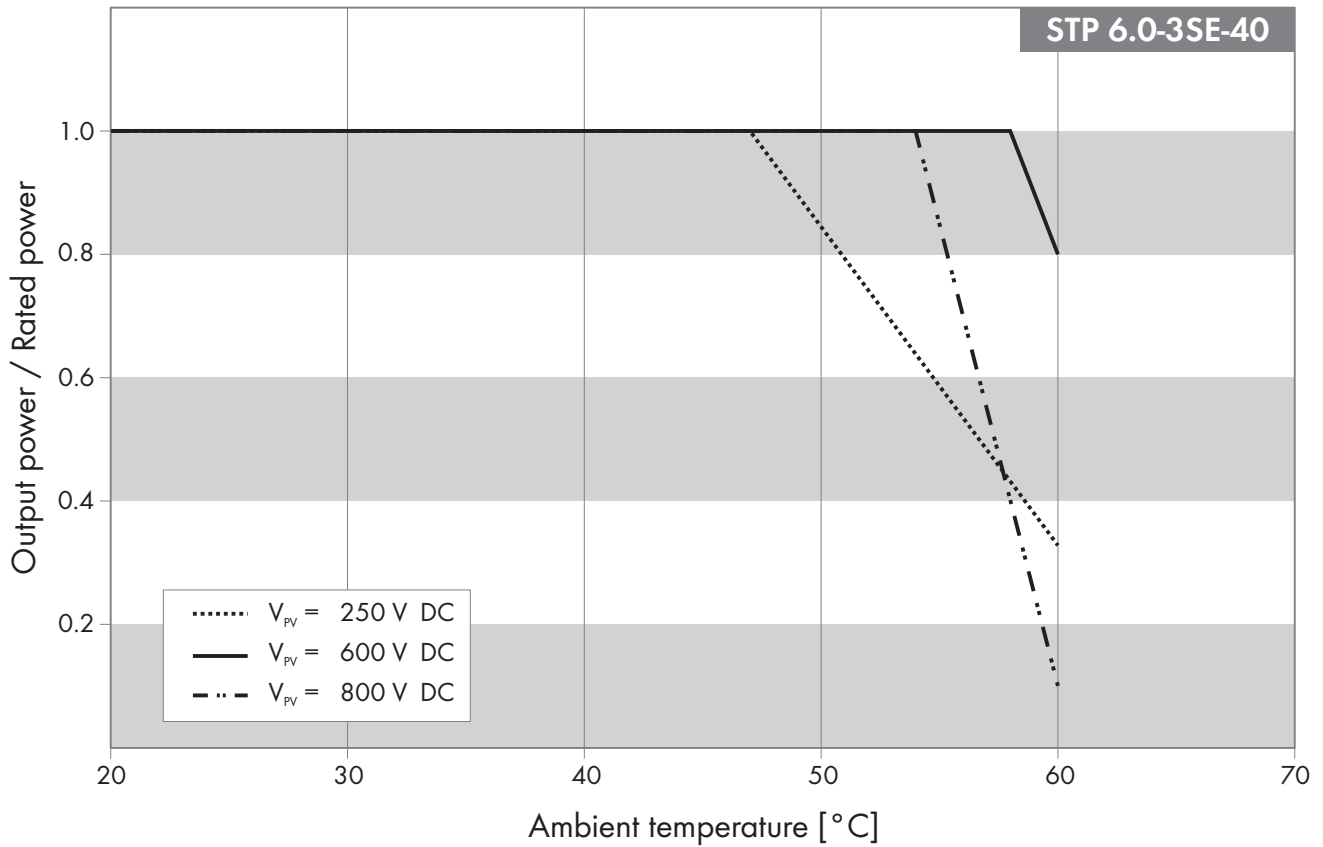

9.3 STP8.0-3SE-40

9.3.1 Efficiency

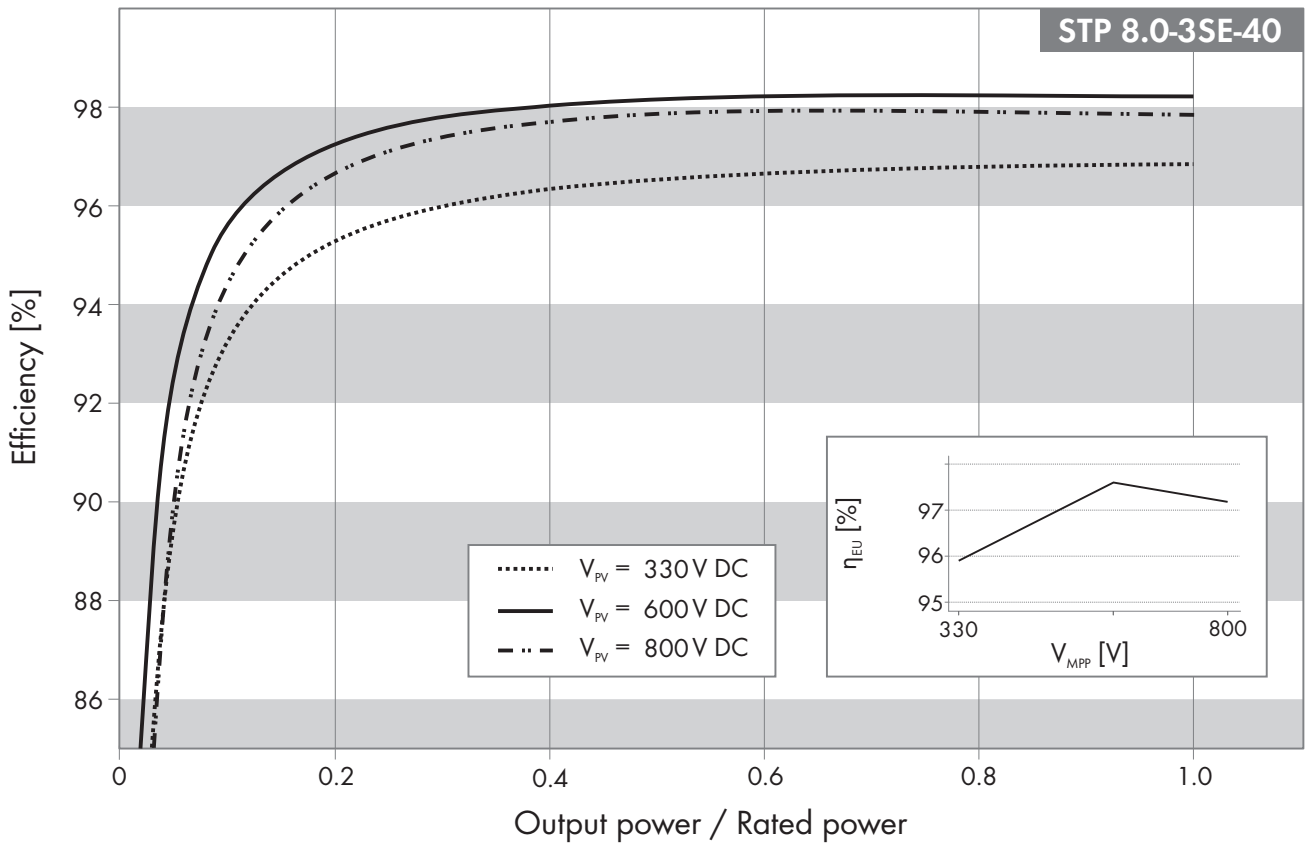


Maximum efficiency, η_{max}	98.2 %
European weighted efficiency, η_{EU}	97.8 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage	Rated input voltage	Maximum MPP voltage
	330 V	600 V	800 V
5 %	89.5 %	92.4 %	90.0 %
10 %	93.2 %	95.5 %	94.3 %
20 %	95.2 %	97.2 %	96.6 %
25 %	95.7 %	97, 5%	97.1 %
30 %	96.0 %	97.7 %	97.3 %
50 %	96.5 %	98.1 %	97.8 %
75 %	96.7 %	98.2 %	97.9 %
100 %	96.8 %	98.2 %	97.8 %

9.3.2 Derating Behavior

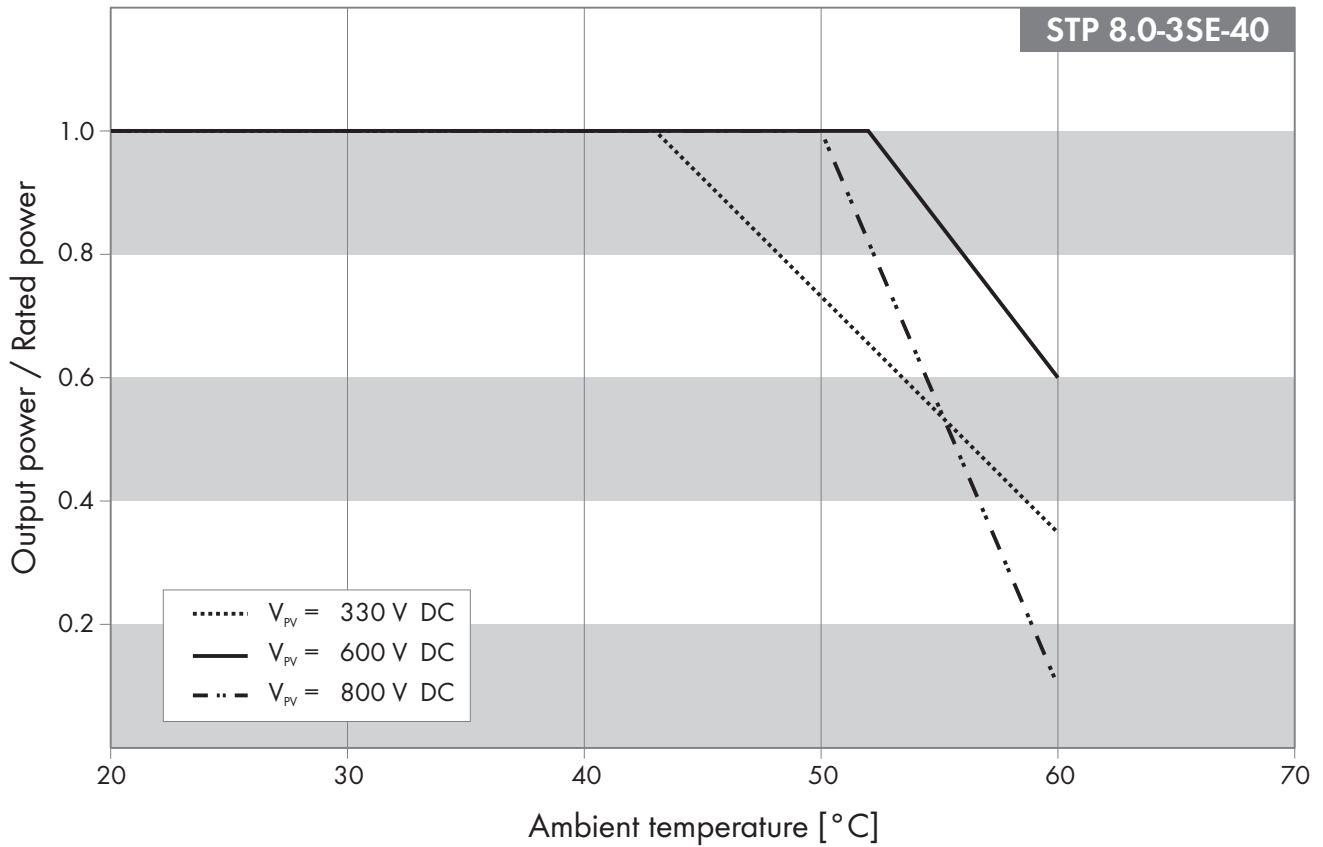

9.4 STP10.0-3SE-40

9.4.1 Efficiency

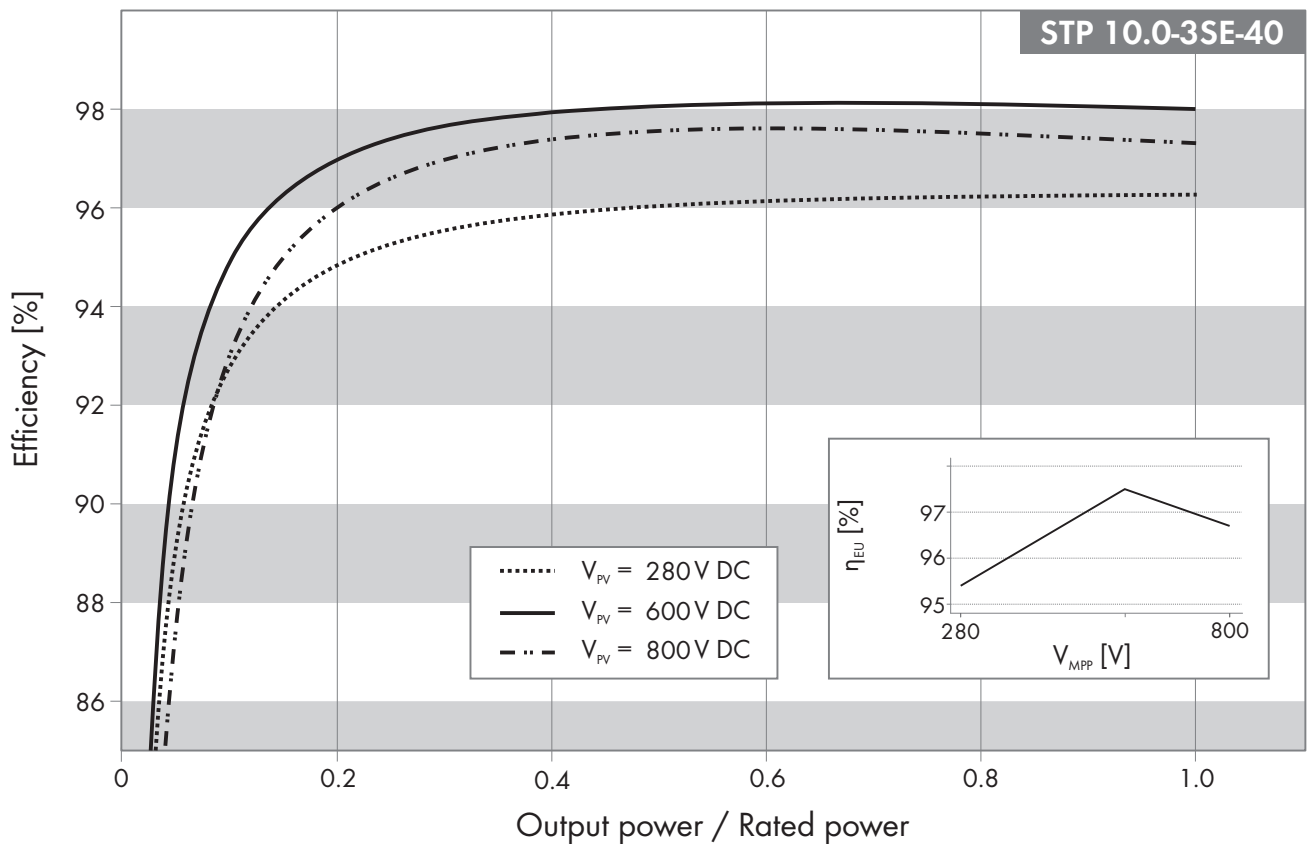

Maximum efficiency, η_{max}

98.1 %


European weighted efficiency, η_{EU}

97.5 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage	Rated input voltage	Maximum MPP voltage
	280 V	600 V	800 V
5 %	89.0 %	90.9 %	87.3 %
10 %	92.8 %	94.8 %	92.9 %
20 %	94.8 %	97.0 %	96.0 %
25 %	95.2 %	97.4 %	96.6 %
30 %	95.5 %	97.6 %	97.0 %
50 %	96.0 %	98.1 %	97.5 %
75 %	96.2 %	98.1 %	97.5 %
100 %	96.3 %	98.0 %	97.3 %


9.4.2 Derating Behavior

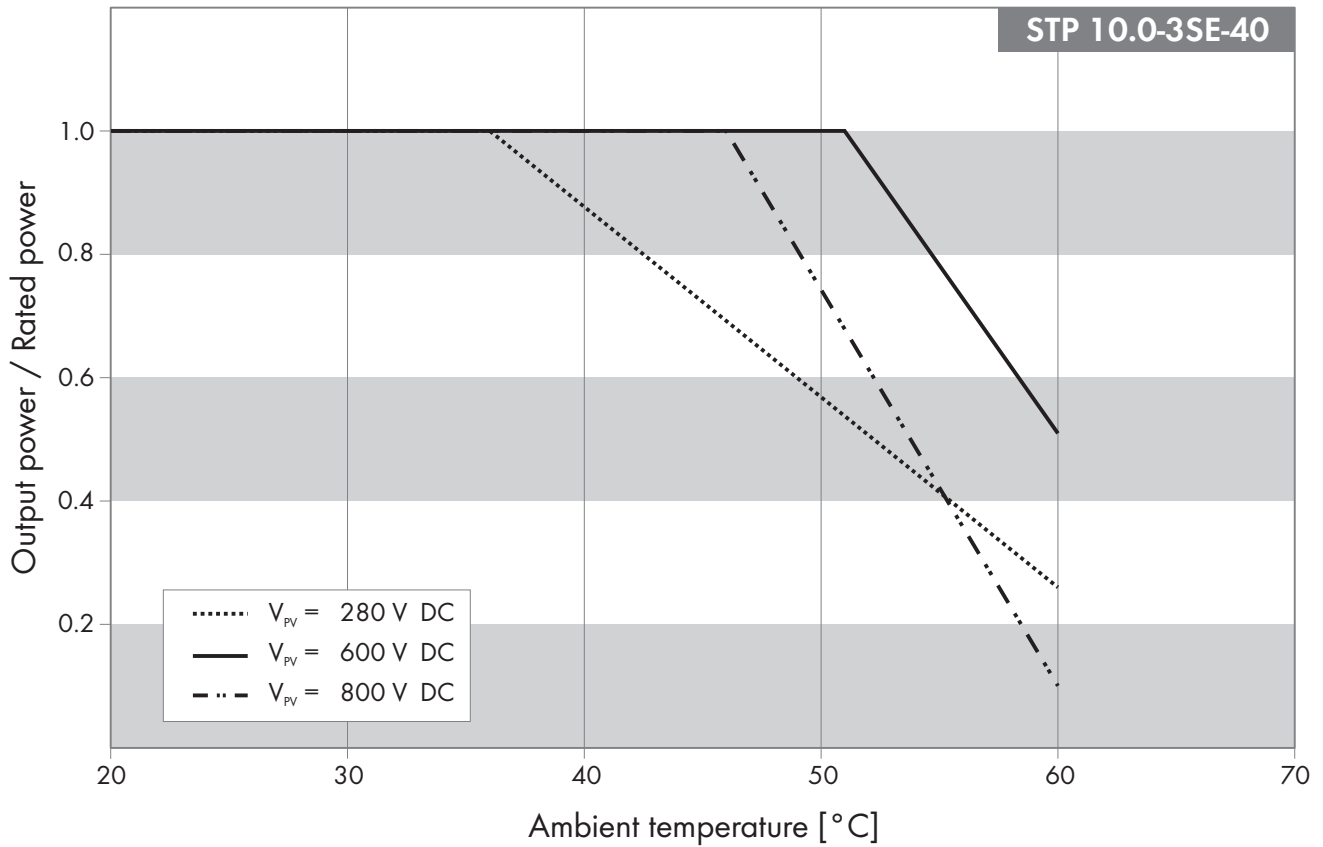

10 Sunny Highpower

10.1 SHP 100-21

10.1.1 Efficiency

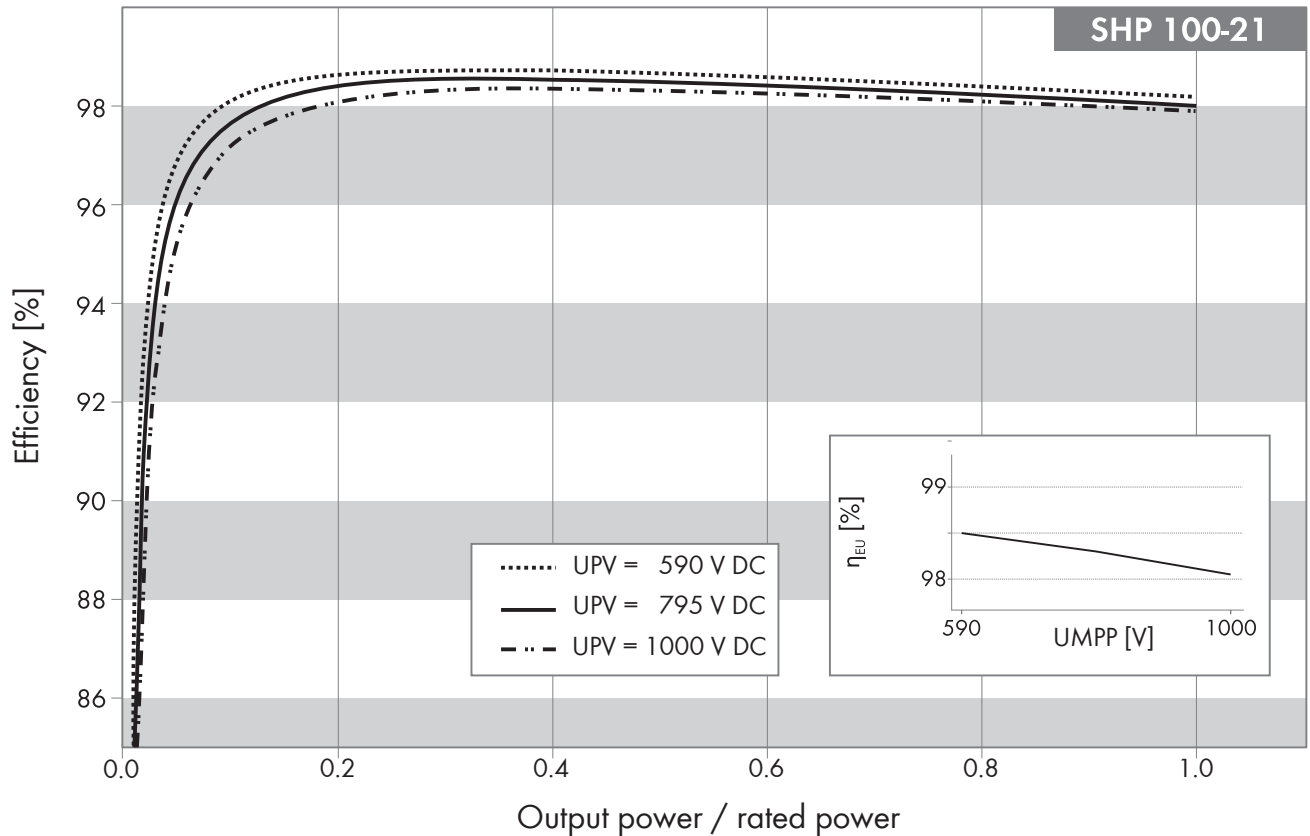


Maximum efficiency, η_{max} 98.8 %

European weighted efficiency, η_{EU} 98.5 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 590 V	Rated input voltage 795 V	Maximum MPP voltage 1000 V
5 %	97.0 %	96.0 %	95.3 %
10 %	98.2 %	97.6 %	97.2 %
20 %	98.7 %	98.4 %	98.1 %
25 %	98.8 %	98.5 %	98.2 %
30 %	98.8 %	98.5 %	98.3 %
50 %	98.7 %	98.5 %	98.3 %
75 %	98.5 %	98.3 %	98.2 %
100 %	97.2 %	98.0 %	97.9 %

10.1.2 Derating Behavior

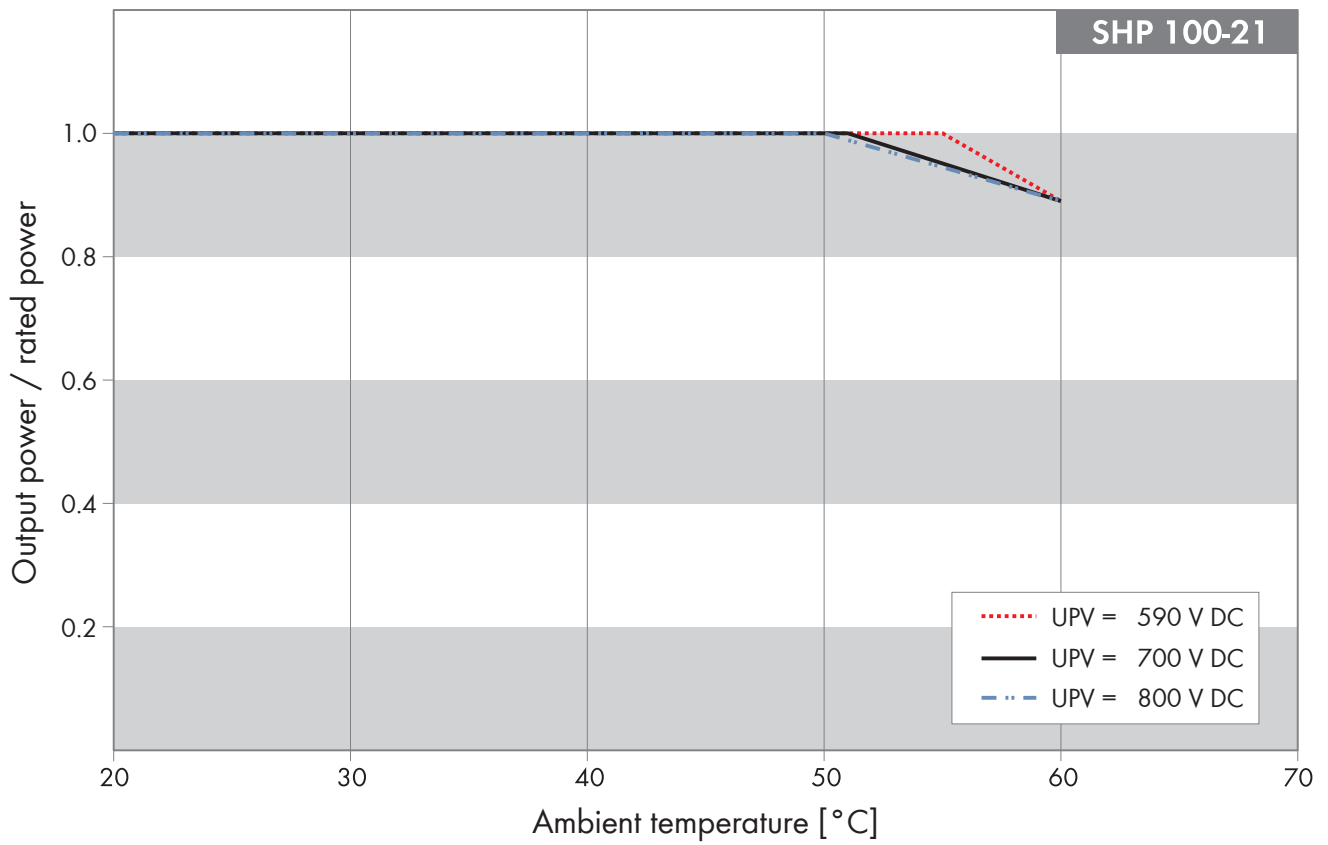

10.2 STP 150-21

10.2.1 Efficiency

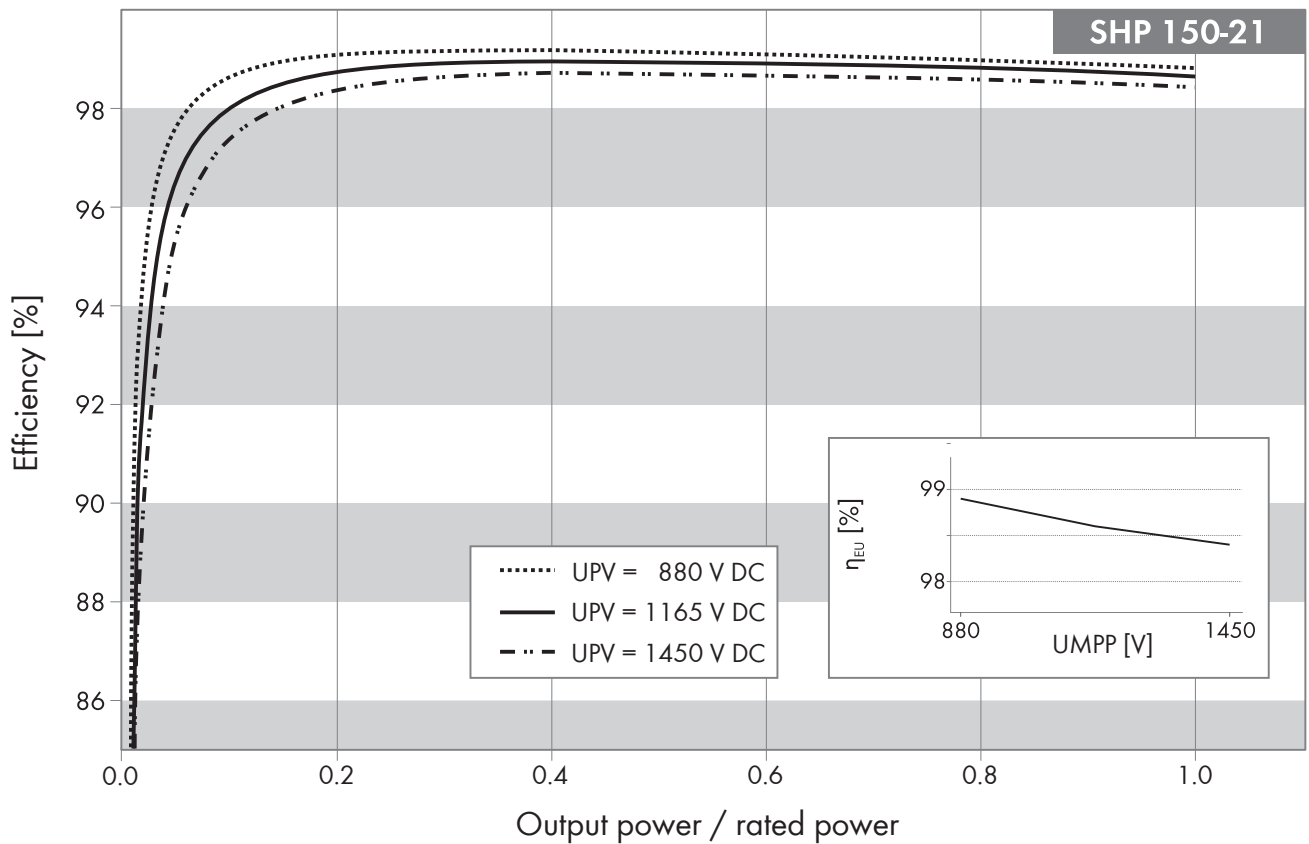


Maximum efficiency, η_{\max} 99.1%

European weighted efficiency, η_{EU} 98.8%

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 880 V	Rated input voltage 1165 V	Maximum MPP voltage 1450 V
5%	97.5%	96.5%	95.2%
10%	98.6%	98.0%	97.3%
20%	99.0%	98.7%	98.3%
25%	99.1%	98.8%	98.5%
30%	99.1%	98.8%	98.6%
50%	99.1%	98.9%	98.7%
75%	99.0%	98.7%	98.6%
100%	98.8%	98.6%	98.4%

10.2.2 Derating Behavior

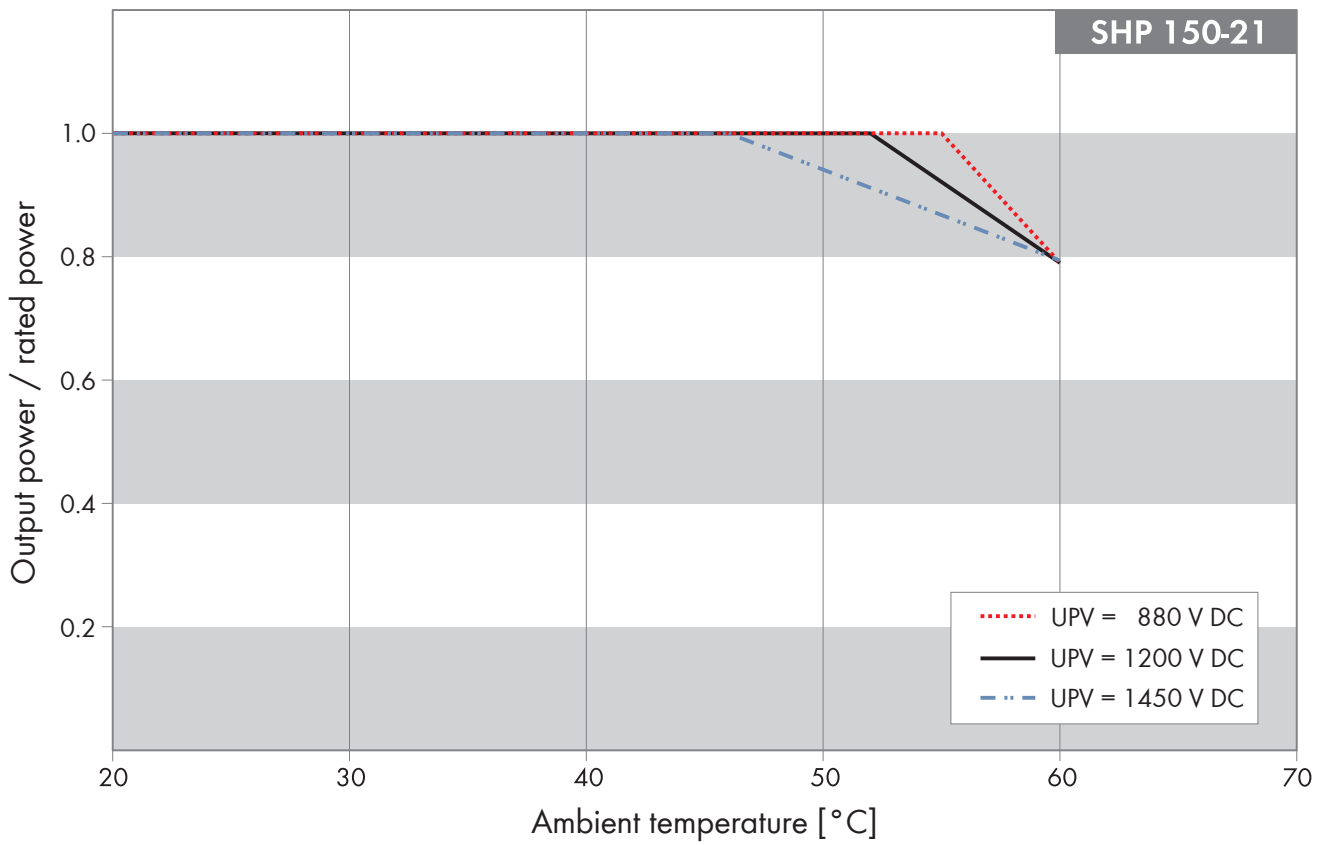

10.3 SHP 172-21

10.3.1 Efficiency

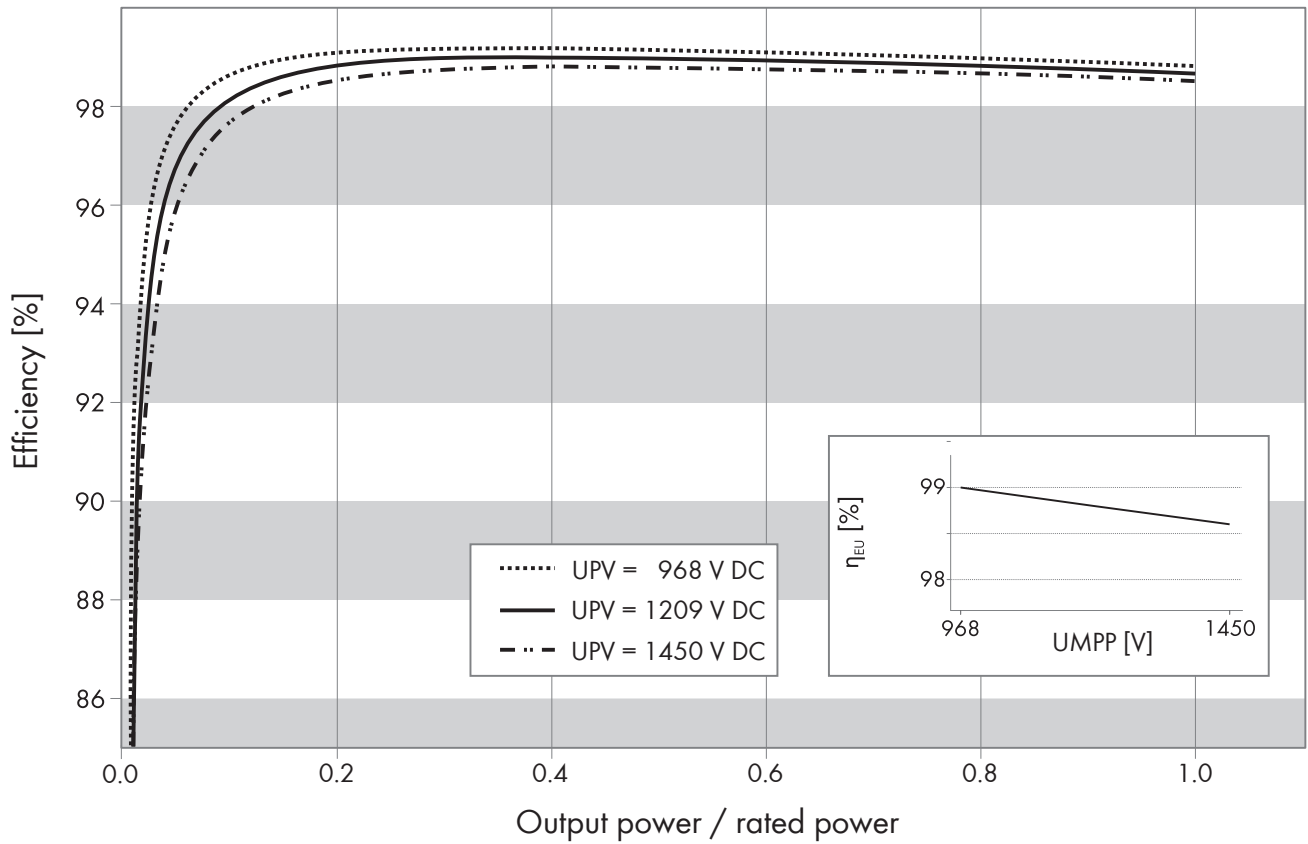


Maximum efficiency, η_{max} 99.2 %

European weighted efficiency, η_{EU} 99.0 %

Efficiency Profile


Standardized output power	Efficiency		
	Minimum MPP voltage 968 V	Rated input voltage 1209 V	Maximum MPP voltage 1450 V
5 %	97.7 %	96.7 %	95.9 %
10 %	98.7 %	98.1 %	97.7 %
20 %	99.1 %	98.8 %	98.5 %
25 %	99.2 %	98.9 %	98.7 %
30 %	99.2 %	98.9 %	98.7 %
50 %	99.2 %	99.0 %	98.8 %
75 %	99.0 %	98.8 %	98.7 %
100 %	98.9 %	98.6 %	98.5 %

10.3.2 Derating Behavior

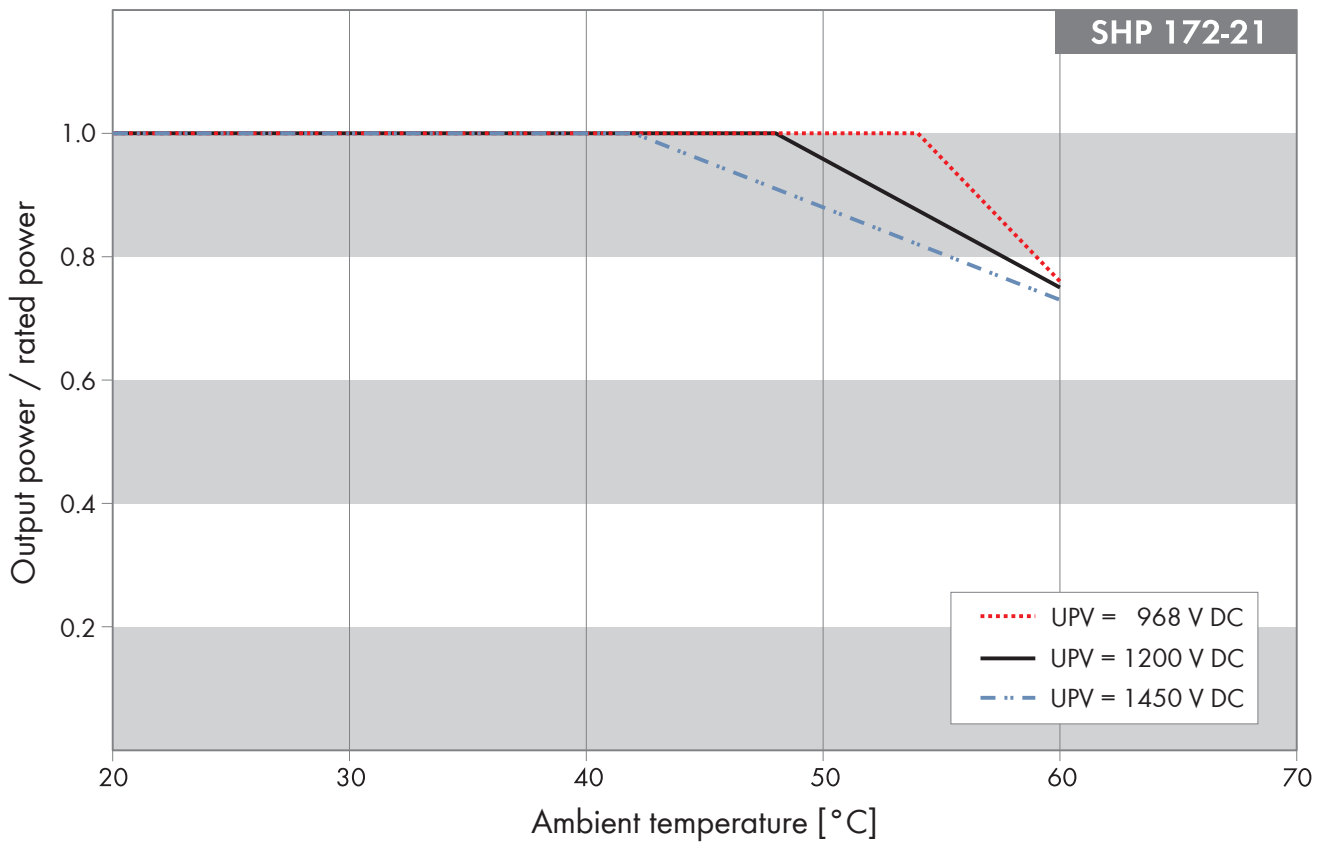

10.4 SHP 180-21

10.4.1 Efficiency

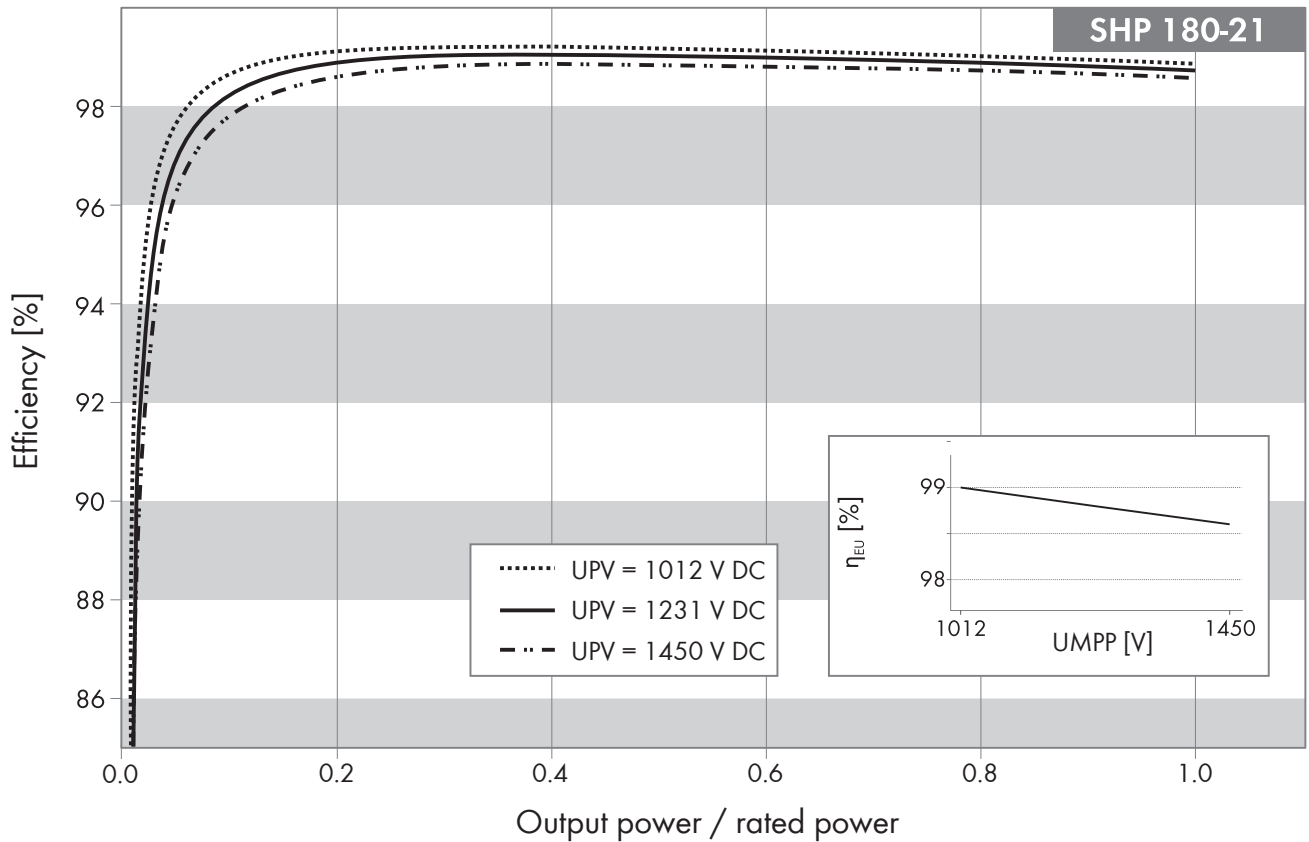


Maximum efficiency, η_{max} 99.2 %

European weighted efficiency, η_{EU} 99.0 %

Efficiency Profile

Standardized output power	Efficiency		
	Minimum MPP voltage 1012 V	Rated input voltage 1231 V	Maximum MPP voltage 1450 V
5 %	97.7 %	96.8 %	96.1 %
10 %	98.7 %	98.2 %	97.8 %
20 %	99.1 %	98.8 %	98.6 %
25 %	99.2 %	98.9 %	98.7 %
30 %	99.2 %	99.0 %	98.8 %
50 %	99.2 %	99.0 %	98.9 %
75 %	99.1 %	98.9 %	98.8 %
100 %	98.9 %	98.7 %	98.6 %

10.4.2 Derating Behavior

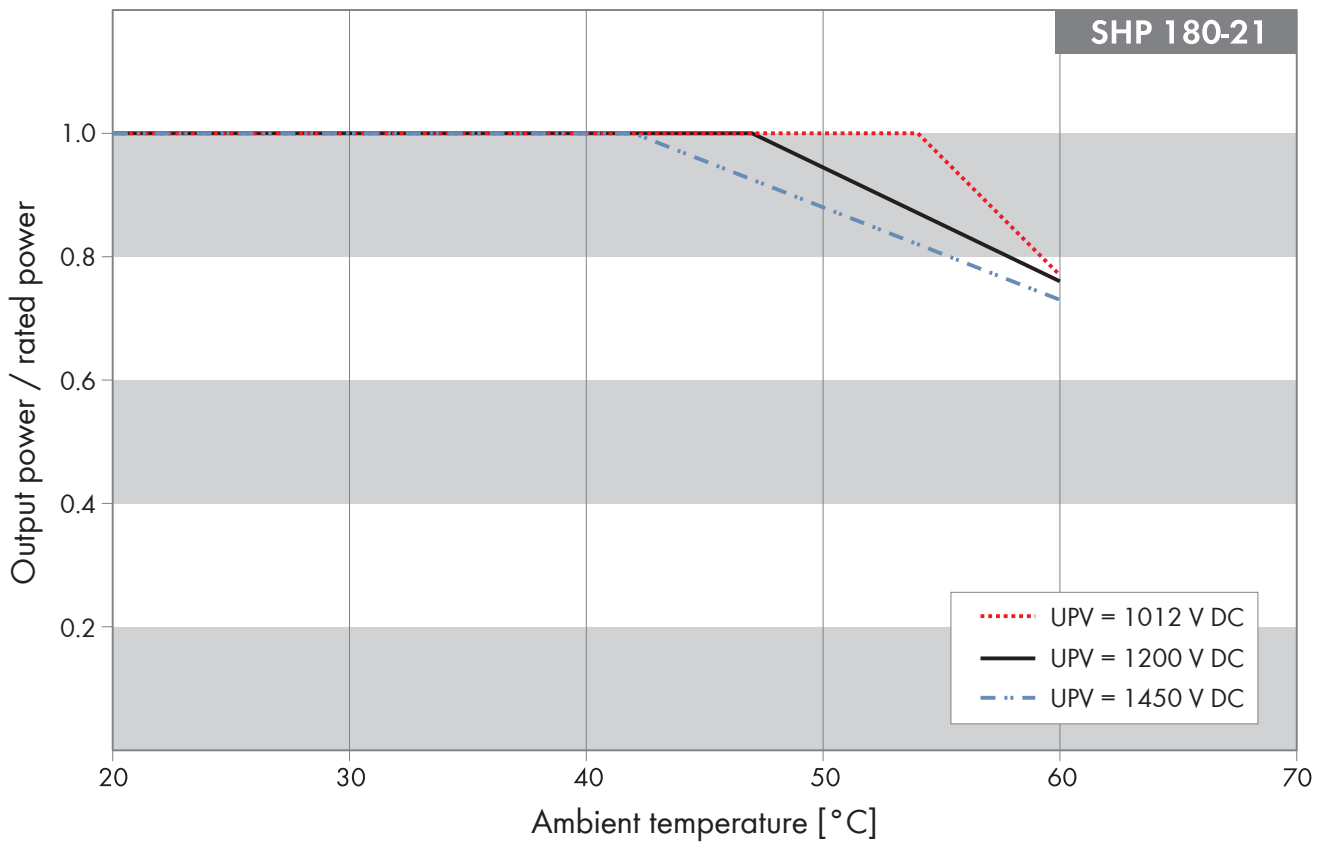

ENERGY
THAT
CHANGES



www.SMA-Solar.com

